

---

**PCB Layer Calculation and Documentation Tool**

**User Guide**

# **Speedstack**

## **PCB Stackup Builder**

**Polar Instruments Ltd**

Polar Instruments Ltd.  
Garenne Park  
St. Sampson  
Guernsey  
Channel Islands  
GY2 4AF  
ENGLAND

email: [mail@polarinstruments.com](mailto:mail@polarinstruments.com)  
<http://www.polarinstruments.com>

MAN 199–1505



# **Speedstack User Guide**

## **POLAR INSTRUMENTS LTD**

### **COPYRIGHT**

Copyright 2015 (c) by Polar Instruments Ltd. All rights reserved. This software and accompanying documentation is the property of Polar Instruments Ltd and is licensed to the end user by Polar Instruments Ltd or its authorized agents. The use, copying, and distribution of this software is restricted by the terms of the license agreement.

Due care was exercised in the preparation of this document and accompanying software. Polar Instruments Ltd. shall not be liable for errors contained herein or for incidental or consequential damages in connection with furnishing, performance, or use of this material.

Polar Instruments Ltd makes no warranties, either expressed or implied, with respect to the software described in this manual, its quality, performance, merchantability, or fitness for any particular purpose.

### **DISCLAIMER**

#### **1. Disclaimer of Warranties**

POLAR MAKES NO OTHER WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, REGARDING PRODUCTS. ALL OTHER WARRANTIES AS TO THE QUALITY, CONDITION, MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT ARE EXPRESSLY DISCLAIMED.

#### **2. Limitation of Liability.**

POLAR SHALL NOT BE RESPONSIBLE FOR DIRECT DAMAGES IN EXCESS OF THE PURCHASE PRICE PAID BY THE END USER OR FOR ANY SPECIAL, CONSEQUENTIAL, INCIDENTAL, OR PUNITIVE DAMAGE, INCLUDING, BUT NOT LIMITED TO, LOSS OF PROFITS OR DAMAGES TO BUSINESS OR BUSINESS RELATIONS, WHETHER OR NOT ADVISED IN ADVANCE OF THE POSSIBILITY OF SUCH DAMAGES, THE FOREGOING LIMITATIONS SHALL APPLY, NOTWITHSTANDING THE FAILURE OF ANY EXCLUSIVE REMEDIES.

### **TRADEMARKS**

Copyright Polar Instruments Ltd. ©2015

Microsoft, Microsoft Windows, Windows XP, Windows Vista, Windows 7, Windows 8 and Microsoft Excel are registered trademarks of Microsoft Corporation.

IBM is the registered trademark of International Business Machines Corporation.

All other trademarks acknowledged.

---

## Speedstack specifications

Maximum layer count	64+
Via rules	Conventional, blind and buried
Materials library	Foils Cores RCC foils Non-copper cores Prepregs Solder masks Flexible cores Bondply Adhesive Coverlays Ident inks Peelable masks
Post press compensation	Yes (user defined)
Finished thickness compensation	Yes
Cu thickness calculation	Yes
Board thickness calculation	Yes
User library	Yes
Save builds	Yes

## Personal computer requirements

Computer	IBM PC compatible
Processor	Pentium 1GHz or better
Operating system	Windows 7 or later
Environment	Requires .NET Framework v1.1 or above
System memory required	2GB recommended
Hard disk space required	200MB (min.)
Video standard	SXGA (1280 x 1024) or higher Hi color 16 bit or higher
Licensing	Fixed: Parallel/USB key Floating FlexLM licence (Windows servers only)

## Guide to the manual

Introduction	Introduces Polar Instruments Speedstack.
Getting started with Speedstack	Steps through the process of creating a simple stack from a set of manufacturer's data.
Configuring Speedstack	Setting up the Speedstack environment including license options, crosshatch and structure defaults, goal seeking parameters and file locations.
Using Speedstack	Discussion of the Speedstack user interface; creating and editing stackups.
Adding controlled impedance structures	Working with the Si8000m/Si9000e field solvers to add controlled impedance structures to the stackup model. Using the goal seeking facilities of the field solver to obtain the correct impedance for a structure.
The Speedstack Materials libraries	Using the Speedstack materials libraries, creating new libraries, adding material to the library.
Design rule checking	Using the Speedstack Design Rule Checker to correct stackup design errors.

# Contents

<b>Speedstack specifications</b>	<b>ii</b>
<b>Personal computer requirements</b>	<b>iii</b>
<b>Introduction to Speedstack</b>	<b>1</b>
Speedstack PCB Stackup Builder	1
Speedstack PCB	1
Speedstack Si	1
Speedstack Flex	2
Speedstack HDI	2
Rapid stackup creation	2
Easy stackup editing	2
High quality documentation and file format	3
Integration with the Si8000/Si9000	3
Materials library	3
Speedstack's Virtual Material mode	4
Preferred builds	4
Dimensional information	4
High layer count boards	4
Supplier management	4
Graphical interface	5
Interfacing with other systems	5
Importing and exporting stackup information	5
<b>Installing Speedstack</b>	<b>6</b>
Installing and activating Speedstack	6
Uninstalling the software	6
Getting started with Speedstack	6
Online tutorial guides	6
<b>Using Speedstack Stackup Builder</b>	<b>7</b>
Speedstack Stackup Builder	7
The Stack Editor	7
The Speedstack menu system	8
The File menu	8
Opening projects	8
Saving stackups	9
Saving projects	9
Searching for stackups and project files	9
Supplying search criteria	10
Importing Stackup information	10
Ucamco Job Files	11
Integr8torJob files	12
XML files	13

Zuken CR-8000	13
Ucamco Integr8tor and Ucam format (.ssx)	13
Exporting stackup information	13
Exporting to Coupon Generator (CGen)	13
Export CITS File	14
Generating printed output	14
DXF, Gerber, CSV and XML files	14
Stackup images	14
IPC-2581 Rev B	15
Ucamco Integr8tor and Ucam	15
Zuken DFM Centre	15
Assigning properties to projects and stackups	15
Backing up stackups and libraries	15
Opening recent files	15
The Edit menu	16
The View menu	17
The Tools menu	17
The Units menu	18
External Utility	18
The Help menu	18
<b>Configuring Speedstack</b>	<b>19</b>
Environment and default settings	19
General Options	19
Structure Defaults	20
Licensing	20
Choosing default file locations	21
Specifying goal seeking parameters	21
Setting user defaults	21
Specifying default CITS test file parameters	22
Choosing background and stackup layer colours	22
Miscellaneous Options	23
Hatch Defaults	23
Rebuild and Calculate Structures	24
Manufacturing Constraints	24
Editing and adding constraints	25
Set Target Stackup Thickness/Enable Finishing	26
Finishing Options	26
Simple Percentage Method	27
Copper Coverage method	28
Virtual Material mode	28
Working with external utilities	29
The Speedstack toolbar	30
File operations	30
Stack building operations	30
Editing the stackup	31
Copying and pasting materials	31
Changing plane types	31
Applying finishing	32
Changing the stackup view	32
Managing the materials library	32



Exchanging data with the Si8000 or Si9000 Field solver	32
<b>Creating and editing stackups (Virtual Material mode)</b>	<b>33</b>
Using the Stackup Wizard	34
Setting basic stack data	34
Adding drills	34
Adding microvias	35
Editing the stack	37
Changing material properties	37
Choosing Symmetrical mode	37
Changing the material description	37
Changing electrical layers	38
Setting hatched planes	39
Adding controlled impedance structures	39
Calculating the structure impedance	40
Goal Seeking the target impedance	41
Mirroring structures	42
Rebuilding the stack	42
<b>Creating and editing stackups (Material Library mode)</b>	<b>43</b>
Using the Stackup Wizard	43
Electrical layer count	43
Build type	43
Choosing stackup materials	44
Adding layers	44
Nominating power planes and mixed layers	45
Adding drill information	45
Changing the Stackup view	47
Filtering Materials	47
Saving stackups	47
Creating stackups manually	48
Editing the stack	48
Adding layers to the stackup	48
Adding a core layer	49
Editing the selected layer properties	50
Adding data file names	51
Changing a layer function	51
Exchanging layers	52
Adding prepreg layers	52
Choosing the Display Data fields	53
Adding a foil layer	53
Adding solder mask layers	54
Adding the Ident layers	55
Adding a drill	56
Deleting drills	56
Adding stack vias	57
Deleting a layer	58
Copying a layer	58
Copying material properties	59
Moving materials	61

Applying finishing	61
Displaying the stackup in 2-dimensional view	61
Mirror Build	61
Symmetrical Builds	62
Creating a new stack	62
Adding a prepreg layer in Symmetrical Mode	63
Adding a second prepreg layer	64
Adding foil, LPI Mask and Ident layers	65
Assigning ground planes	66
Design rule checking	67
Viewing design rule errors	67
Correcting design rule errors	68
Creating and using manufacturing constraints	69
Editing constraints	69
Adding controlled impedance structures	70
Adding a controlled impedance structure	70
Choosing reference planes	72
Controlled impedance toolbar	74
Changing parameter values	75
Goal seeking with Speedstack	75
Goal seeking with the Si8000m/9000e	76
CITS test files	77
Exporting the CITS test file	77

## **Working with flex-rigid stackups 78**

Speedstack Flex	78
Easy graphical stackup display	78
Mesh / Crosshatch ground planes	78
Internal Coverlays	79
Definable colours per material	79
Enabling Speedstack Flex/HDI	79
Adding a flexible core	79
Using the Navigator	80
Adding stacks	80
Adding a new stack	82
Defining new stacks	83
Copying and pasting stacks	83
Removing stacks	83

## **Working with HDI builds 84**

Speedstack HDI	84
Easy graphical stackup display	84
Sub-stack reordering	84
HDI builds	84
Sequential plan	84
Drill plan	84
Using the Sequential Plan	90
Using the Drill Plan	92
Exposing cores	93
Working with multiple press cycles	94

Printing the Navigator screen	94
<b>Using Speedstack materials libraries</b>	<b>95</b>
Working with the materials libraries	95
Materials library toolbar	96
Creating a new library	96
Adding material to the library	97
Importing material to the library	98
Creating a new materials library	98
Adding material data to an existing library	99
Selecting Materials from the Library	99
Column Order (Materials Library)	99
Arranging Columns in Library Forms	99
Filtering Materials	100
Building the filter string	101
Using the Like operator	101
Locking the library	101
<b>Printing stackup information</b>	<b>102</b>
Speedstack Report Printer toolbar	102
Speedstack Report Printer menu system	104
File menu	104
Options menu	104
Page Setup	104
Stack Data Table	104
Controlled Impedance Data Table	105
Drill DataTable	106
Note Field Aliases	107
Print Order	107
General options	107



# Introduction to Speedstack

## Speedstack PCB Stackup Builder

Polar's Speedstack PCB Stackup Builder is designed to accelerate the PCB stack design process and deliver significant reductions in the amount of time consumed in PCB stackup documentation and control. Given designer specifications the PCB fabricator can use the Speedstack Stackup Builder to create in just a few steps the most cost effective stack for the range of available materials. Speedstack offers interconnect designers (PCB layout engineers), PCB front-end engineers and fabricators a fast and professional solution to layer stackup creation. Speedstack provides formal documentation for everyone involved in ensuring the correct materials are used in the build process.

## Speedstack PCB

Speedstack is a versatile PCB layer stackup design tool featuring powerful and easy to use graphical stackup editing capabilities. For PCB fabricators Speedstack PCB interfaces with the industry standard Polar Si8000m PCB Controlled Impedance Field Solver. It includes a link and license for Polar's Si8000m, using the proven Polar Si8000m multiple dielectric boundary element field solver to provide the impedance data for the stack. In addition, Speedstack PCB licence holders have full access to the stand alone Si8000m Quick Solver licence.

Speedstack PCB is especially tailored for PCB fabricators and PCB brokers – anyone with a requirement to design or communicate controlled impedance PCB stackups.

Speedstack PCB customers are able to share stackups and read impedance requirements from designers who are using Speedstack Si.

## Speedstack Si

For electronic engineers involved in stackup design Speedstack Si interfaces with the Polar Si9000e PCB Transmission Line Field Solver.

Both Speedstack Si and Speedstack PCB are able to directly output controlled impedance test files associated with each stackup. For the fabricator this is an ideal way to link the impedance test requirements to a particular job. For the OEM this offers a clear method of sending impedance test

---

specifications out to suppliers or brokers. Designers and fabricators can work together and select the best material combinations for minimising build costs. Fabricators can share their in house material libraries with OEMs and ensure the most effective material choice is employed in the build.

### **Speedstack Flex**

Speedstack Flex allows OEM designers to create accurate and efficient flex-rigid PCB stackups in just a few minutes, with error-free documentation for tighter control over the finished board. For PCB fabricators, Speedstack Flex provides the flexibility to quickly calculate the impact of substituting alternative materials to improve manufacturability and reduce cost while maintaining the specified parameters and performance of the board. Speedstack Flex can be used in conjunction with the Si8000m and Si9000e field solvers when modelling and documenting mesh/crosshatch ground. Structure data and mesh geometry can be readily shared between Speedstack and the field solvers.

### **Speedstack HDI**

Speedstack's HDI navigator quickly guides you through the sequential sub-stack lamination sequence and presents the complete assembly in a parsed graphical display that shows each phase of the multi-step lamination sequence of an HDI PCB. There is no limit to the number of press cycles that can be documented. User-definable settings within the navigator allow engineers to display layers in transparent, invisible or 3D mode. Speedstack HDI makes re-ordering and renaming sub-stacks quick and easy with the Speedflex Navigator. This is especially useful for HDI constructions.

### **Rapid stackup creation**

Users may specify the stackup semi-automatically with the powerful Stackup Wizard or alternatively build the stack manually, layer by layer. Speedstack is flexible and allows full manual editing of stacks created by the Stackup Wizard.

### **Easy stackup editing**

The Speedstack allows the user to view stackup in 2D or 3D format. Layer and material annotation is clear and easy to read and each layer may be selected and queried to display the associated material type and properties, including the associated data file. Visible drill information ensures that designers instantly know which layers support conventional, blind and buried vias.

Speedstack allows you rapidly to build and share stacks and verify via aspect ratios and track spacing rules. The stack file contains base material information combined with layer

description and a complete listing of transmission line structures deployed in the stack. Keeping all stack information in one file ensures that manufacturing data is accurately shared between original designer and fabricator. Speedstack's Stack Editor provides efficient and time-saving features such as Copy/Paste Material properties so the stack designer can copy all properties from a selected material and then paste user-selectable property groups to other materials.

### **High quality documentation and file format**

Speedstack saves the stack in efficient electronic format and outputs stack graphics in a variety of formats to suit your requirements. Stack data may be output in GERBER, DXF, BMP, JPEG, TIFF and XML. In addition, the stack data can be exported in comma-separated form for inclusion in other systems. Speedstack's high quality customisable printouts make it easy to discuss alternate builds and pricing impacts with fabricators.

Applications engineers, front end and production engineers benefit from receiving stack information in an intuitive, easy to understand format. The Speedstack .sci file contains full details of the layer stackup of a particular job. If changes are necessary or preferred stacks are to be shared with customers, Speedstack can cut the time for documentation and information sharing to a fraction of the time taken when employing traditional methods such as spreadsheet, word processor or presentation software.

### **Integration with the Si8000/Si9000**

The Speedstack is fully integrated with the Polar Si8000m Controlled Impedance and the Si9000e PCB Transmission Line Field Solvers so the user can quickly add controlled impedance structures to layers in the stackup. The designer or board fabricator can use the Goal Seek facility of the Si8000m/Si9000e field solvers to arrive rapidly at the controlled impedance structure parameters to produce the target impedance.

### **Materials library**

The Speedstack supports a flexible materials library. This allows the designer to use standard materials data and also provides the facility to create new material libraries. PCB fabricators can also build libraries of commonly stocked materials to give interconnect designers visibility of the materials held in stock. Speedstack thus supports three types of library – custom user libraries of materials, generic designer libraries of materials of given dielectric characteristics (for example, thicknesses) along with a comprehensive set of materials libraries from PCB base

material suppliers who are members of the Polar Speedstack Material Partner program.

### **Speedstack's Virtual Material mode**

Speedstack provides *Virtual Material* mode allowing you to build and experiment with stackups (for example to examine the effects on impedance structures of different trace widths or dielectric heights) without requiring real materials to be entered into a materials library.

In Virtual Material mode you will use the Stackup Wizard to enter a few details about the stack, the number of layers, overall board thickness, plane and mixed layers, etc., along with solder mask and copper thickness and build type (foil, core or HDI.) and drills Speedstack will then build a stack to the specified board thickness by equally distributing the dielectric regions. If a preferred core thickness is specified the software will maintain the dielectric thickness for core regions but then equally distribute prepreg regions to reach the target board thickness.

### **Preferred builds**

PCB fabricators are able to create and share preferred builds and exchange the associated information with designers. Build data also includes blind and buried via specification. This simplifies the task of sharing stackup and drilling information between board shops and the design community.

### **Dimensional information**

Finished board thickness is a critical dimension in many applications; Speedstack keeps track of the finished PCB thickness and tolerance and allows fabricators the flexibility of adding in-house post-press thickness for prepreg layers. Additionally, Speedstack takes into account plating thickness where appropriate.

### **High layer count boards**

On boards with high layer counts it can be very easy to make a change that would produce a non-symmetrical stack. The Speedstack Design Rules Check monitors symmetry across the stack, and ensures that material symmetry is maintained. Speedstack also makes it easy to set the symmetrical build mode to ensure that any changes you make are applied equally across the stack.

### **Supplier management**

When multiple-sourcing PCBs or when moving from prototype to volume production, the stack and fabrication design rule checks ensure that the manufacturing capabilities



of your chosen suppliers are not overlooked. In addition the professional documentation output from the SB8000/SB9000 ensures that layer stack information is accurately conveyed to PCB suppliers.

### **Graphical interface**

Speedstack offers an easy to interpret graphical interface. Clearly showing the layers supporting blind and buried vias, Speedstack also records the data file for each layer (including ident and peelable mask layers). The graphical interface is especially designed to simplify the process of communication between interconnect designer and fabricator. OEMs who need to manage boards sourced from multiple suppliers will also find this facility invaluable. In addition to physical layers Speedstack adds mask and notation for electrical layers.

### **Interfacing with other systems**

Speedstack is able to load an XML file on launch. If an XML file (.stkx) filename parameter is specified on the command line it will import this file into Speedstack.

Speedstack can call an external program / utility / script via the External Utilities menu options. The menu items are configured within the Configuration option.

### **Importing and exporting stackup information**

Speedstack incorporates the facility to read in files in XML format and Ucamco Job File format. Speedstack provides comprehensive integration with Ucamco and will import files from and export to both Ucam and Integr8tor.

Stacks may be exported to the Polar CGen Coupon Generator for subsequent processing into test coupons. The Export CITS File option will create test files for Polar CITS controlled impedance test systems.

Speedstack can generate printed output in DXF, Gerber, CSV and XML, as well as graphic image formats JPEG, BMP and TIFF.

Speedstack integrates directly with the Zuken DFM Center PCB manufacturing pre-processing and CAM system.

# Installing Speedstack

## Installing and activating Speedstack

It will be necessary to install and activate the product license and set operating options prior to building stacks or performing calculations with Speedstack. See *Configuring Speedstack/Licensing* to select the associated field solver and purchased options.

Contact [Polarcare@polarinstruments.com](mailto:Polarcare@polarinstruments.com) for installation/activation directions.

Download the software from the supplied link. Unpack and save the installation file to a suitable folder then run Setup.

### Uninstalling the software

*Caution: Prior to uninstalling, make a copy of the Speedstack folder structure and store in a safe place.*

To uninstall the Speedstack software:

#### *Windows XP*

Click the Windows Start button and choose Settings and Control Panel. Double-click Add/Remove Programs and choose Speedstack from the list. Click Remove.

#### *Windows 7/8*

Choose Settings|Control Panel; select Programs and Features and right click Speedstack and choose Uninstall.

## Getting started with Speedstack

### Online tutorial guides

Polar's web site provides online downloadable quick start and version specific user guides to familiarize users with the operation and features of the software.

From the Help menu choose Speedstack Help to download the Getting Started guide, along with tutorials for stack editing, managing materials libraries, manufacturing constraints and controlled impedance structures:

<http://www.polarinstruments.com/help/speedstack/tutorials/>

Download the user guide for your Speedstack version:

<http://www.polarinstruments.com/help/speedstack/Nrmstart.htm>

# Using Speedstack Stackup Builder


## Speedstack Stackup Builder

Double-click the Speedstack icon to start the Speedstack program and display the Stack Editor.

### The Stack Editor

The Stack Editor screen displays all details of the stack, including copper and prepreg materials, solder masks and ident layers, drilling information, controlled impedance structures and design rule check results.

Controlled impedance structure data may be transferred between Speedstack and the associated Polar Si8000m or Si9000e field solver to goal seek for the target structure dimensions.

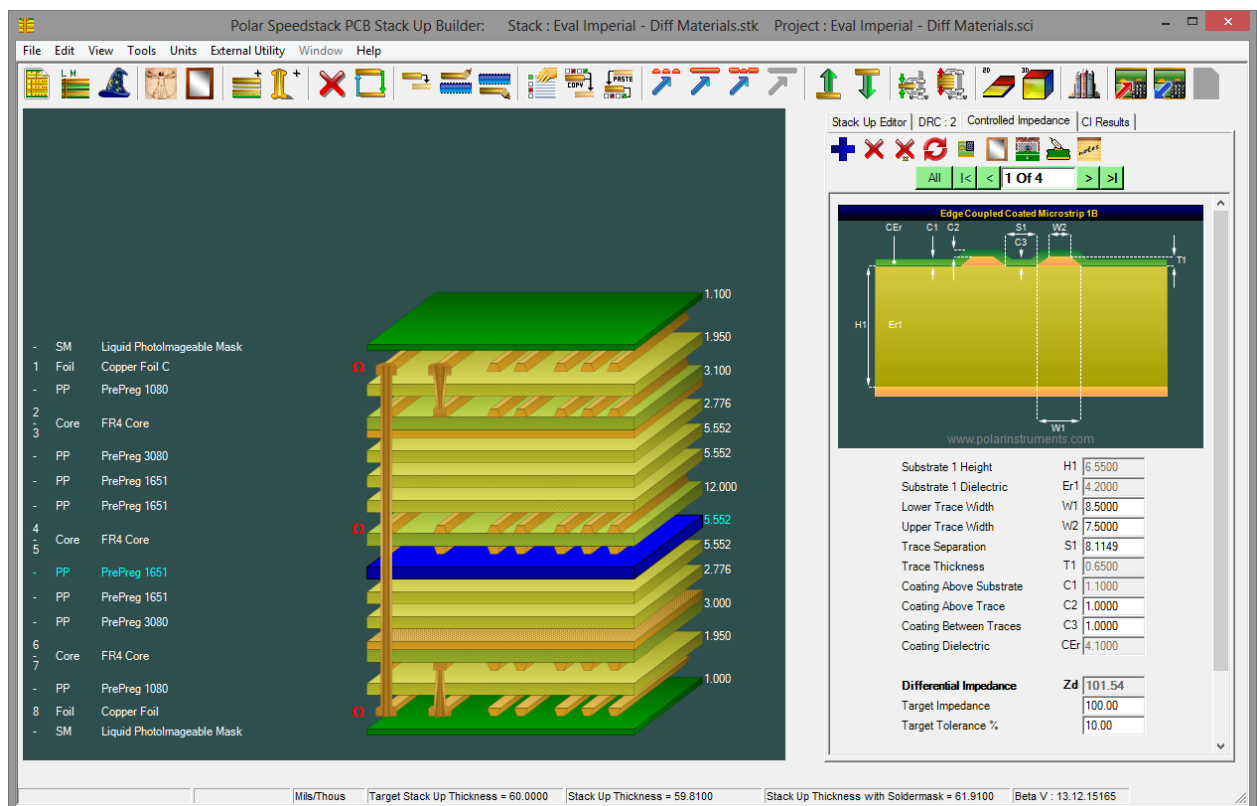

The Stack Editor screen

The Speedstack Stack up Editor screen comprises:

- The Menu bar — drop-down menus containing all the Speedstack Editor commands
- The Tool bar — incorporating short cut tool buttons to the most common menu commands

- The Stackup Build and Construction Window — where the board stack up is built and edited
- The Controlled Impedance window displaying the controlled impedance structures (if any) for the selected layer.
- Stack Up Editor/Notes tab— a free form text area for explanatory or commentary notes
- Design Rules Check (DRC) tab — allows design rules and manufacturing constraints to be specified and violations displayed
- Stack Up Information properties area — table containing information related to the whole stackup
- Selected Item Information area — properties table containing the attributes of the layer currently selected in the stackup

## The Speedstack menu system

### The File menu

The File menu allows for creation of new stackups and projects and opening, saving, printing, importing and exporting existing stackups and projects.

New	Stackup Wizard	Ctrl+N
Open Project	Empty Stack Up	Ctrl+Shift+N
Open Stack		
Search		
Save Project		Ctrl+S
Save Project As		Ctrl+Shift+S
Save Stack		
Save Stack As		
Export		
Import		
Print		
Properties		Ctrl+I
Recent Files		
Exit		Ctrl+Q

### *Opening projects*

Stackups that incorporate controlled impedance structures are saved as projects. Click Open Project and navigate to

the project folder; projects are saved as .sci files. The stackup along with all its design rule checking settings and controlled impedance information is loaded.

#### *Saving stackups*


Click the Save button to save the stackup. Users are recommended to save the stackup frequently during the stackup creation process to avoid data loss; stackups are saved as .stk files.

#### *Saving projects*

Use the Save Projects command to save a stackup and its controlled impedance structures.

### **Searching for stackups and project files**

When creating new stackups and projects it will often be found convenient and timesaving to reuse an existing stack or project, modifying as required and the saving as a new stack or project. From the File menu choose Search and click Change Folder to navigate to the collection of stacks.

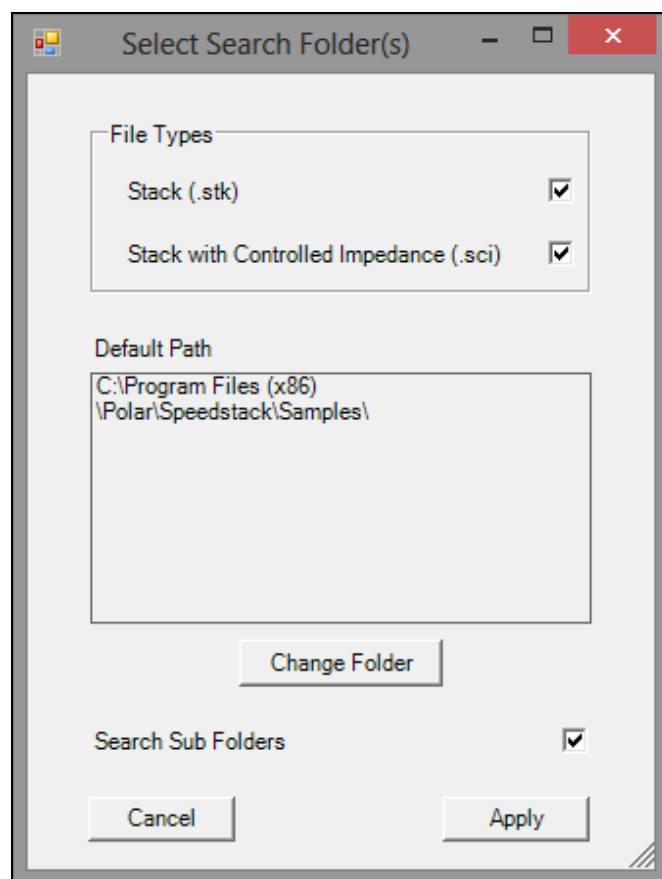

Choose from stacks and/or projects (stacks with controlled impedance;) with the folder chosen, click Apply.

### Supplying search criteria

The stackups and projects within the chosen folder structure are displayed. If appropriate supply criteria, layer count, board thickness, etc. and click Filter.

**Search Existing Stackup Files**

**Filter**

Layer Count ☒ Number Of Layers

Board Thickness ☐ Minimum Thickness  Maximum Thickness

**Stack Data**

Number Of Layers	Actual Thickness	Planes	0.5oz/18microns	1oz/35microns	2oz/70microns	File Name
8	44	3, 5, 6	1, 2, 3, 4, 5, 6, 7, 8			PCi8LayerRigidFlex.sci
8	62.9921	2, 4, 5, 7				VirtualMaterialMode microns.sci
8	62.6772	3, 6	2, 3, 6, 7			AP528-real.sci
8	62.5984	3, 6				AP528-VMM.sci
8	62.5984	3, 6				AP528.sci
8	62.9921	2, 4, 5, 7				App note VMM common structures.sci
8	59.46	3, 6	1, 8	2, 3, 4, 5, 6, 7		Eval Imperial.sci
8	59.46	3, 6	1, 8	2, 3, 4, 5, 6, 7		Eval Imperial.sci
8	60.3346	3, 6	1, 8	2, 3, 4, 5, 6, 7		Eval Metric.sci
8	59.46	3, 6	1, 8	2, 3, 4, 5, 6, 7		Eval Imperial.sci
8	64.6	4, 5	1, 8	2, 3, 4, 5, 6, 7		8-Layer-sample.sci

**Impedances**

Target Value	Upper Signal Layer	Single Ended	Differential	Coplanar	Broadside	Trace Width	Trace Thickness
50	1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	6.413	1.378
100	1	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	4.2504	1.378
50	3	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	5.7209	1.378
100	3	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	3.0913	1.378
50	6	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	5.7209	1.378
100	6	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	3.0913	1.378
50	8	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	6.413	1.378
100	8	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	4.2504	1.378

Step through the list, choose the matching stack or project and click Load File.

### Importing Stackup information


Speedstack incorporates the facility to read in files in:

Ucamco Job File format

XML format

Zuken CR-8000 format

Ucamco Integr8tor and Ucam format

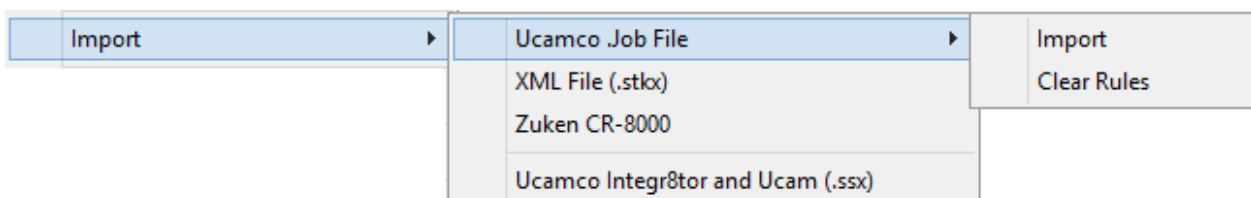


### *Ucamco Job Files*

The .Job file format contains a varying amount of stack up information depending upon the how the system has been configured by the Ucam user.

Speedstack will import files from both Ucam and Integr8tor.

Choose File|Import|Ucamco Job File|Import and select the .job file and click Open. The Ucamco .Job File Import dialog is displayed:

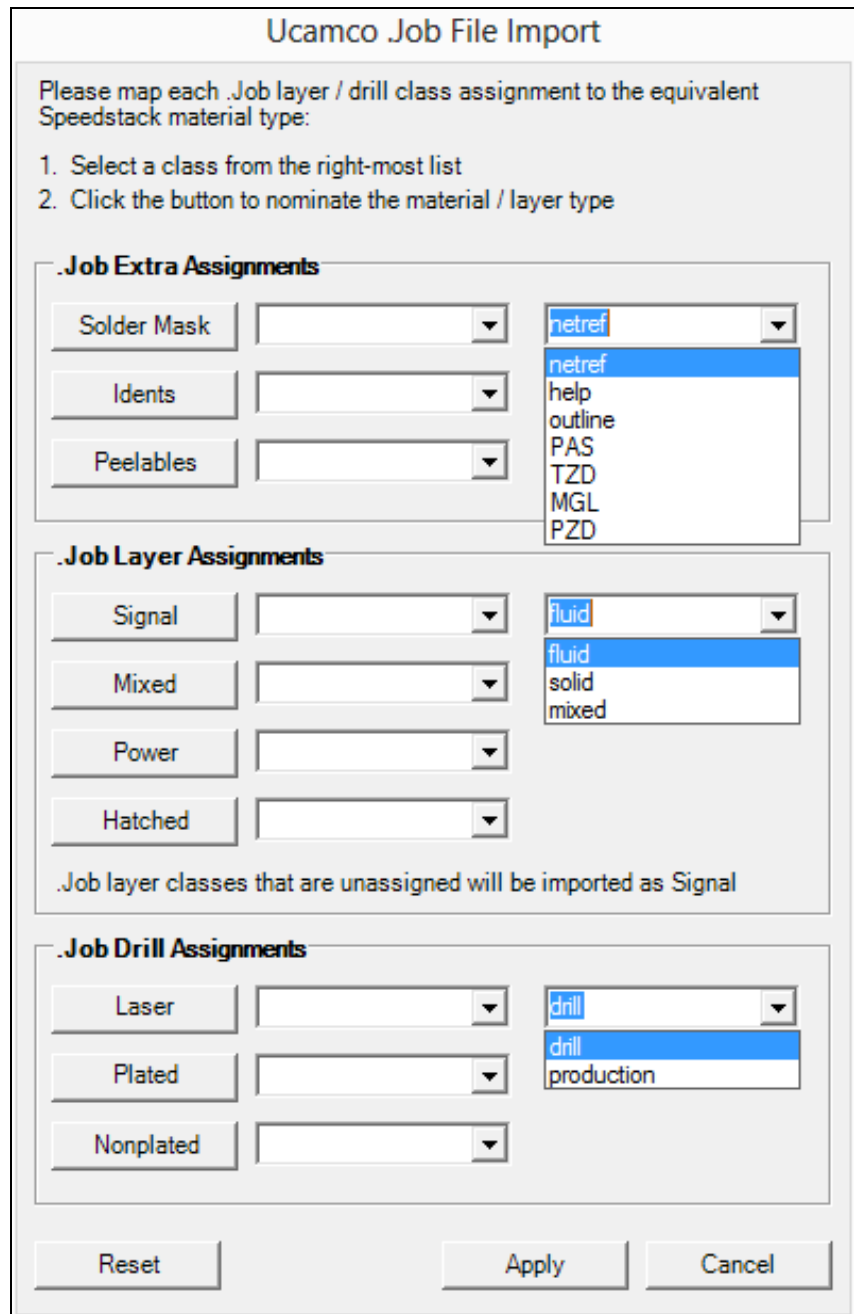

The dialog box is titled "Ucamco Job File Import". It contains instructions: "Please map each .Job layer / drill class assignment to the equivalent Speedstack material type:" followed by two numbered steps: "1. Select a class from the right-most list" and "2. Click the button to nominate the material / layer type".

The dialog is divided into three sections:

- .Job Extra Assignments:** Contains three buttons: "Solder Mask", "Idents", and "Peelables". Each button has a dropdown menu to its right. The "Solder Mask" dropdown is open, showing a list with "netref" at the top (highlighted), followed by "help", "outline", "PAS", "TZD", "MGL", and "PZD".
- .Job Layer Assignments:** Contains four buttons: "Signal", "Mixed", "Power", and "Hatched". Each button has a dropdown menu to its right. The "Signal" dropdown is open, showing a list with "fluid" at the top (highlighted), followed by "fluid", "solid", and "mixed".
- .Job Drill Assignments:** Contains three buttons: "Laser", "Plated", and "Nonplated". Each button has a dropdown menu to its right. The "Laser" dropdown is open, showing a list with "drill" at the top (highlighted), followed by "drill", and "production".

Below the ".Job Layer Assignments" section, there is a note: ".Job layer classes that are unassigned will be imported as Signal".

At the bottom of the dialog, there are three buttons: "Reset", "Apply", and "Cancel".


The .Job file contains user-definable material / drill class definitions so it will be necessary to map these definitions to the various Speedstack material and drill types.

To apply assignments select the class from the drop down list then click the associated button to nominate the material or layer type. Click Apply.

*Note: Where stack data are not included in the .job file it will be necessary to include or update properties (for example, solder mask properties such as thickness and dielectric constant) before adding impedance structures.*

#### *Integr8torJob files*

When Integr8tor files are imported the Ucamco .Job File Import dialog is displayed as shown below.

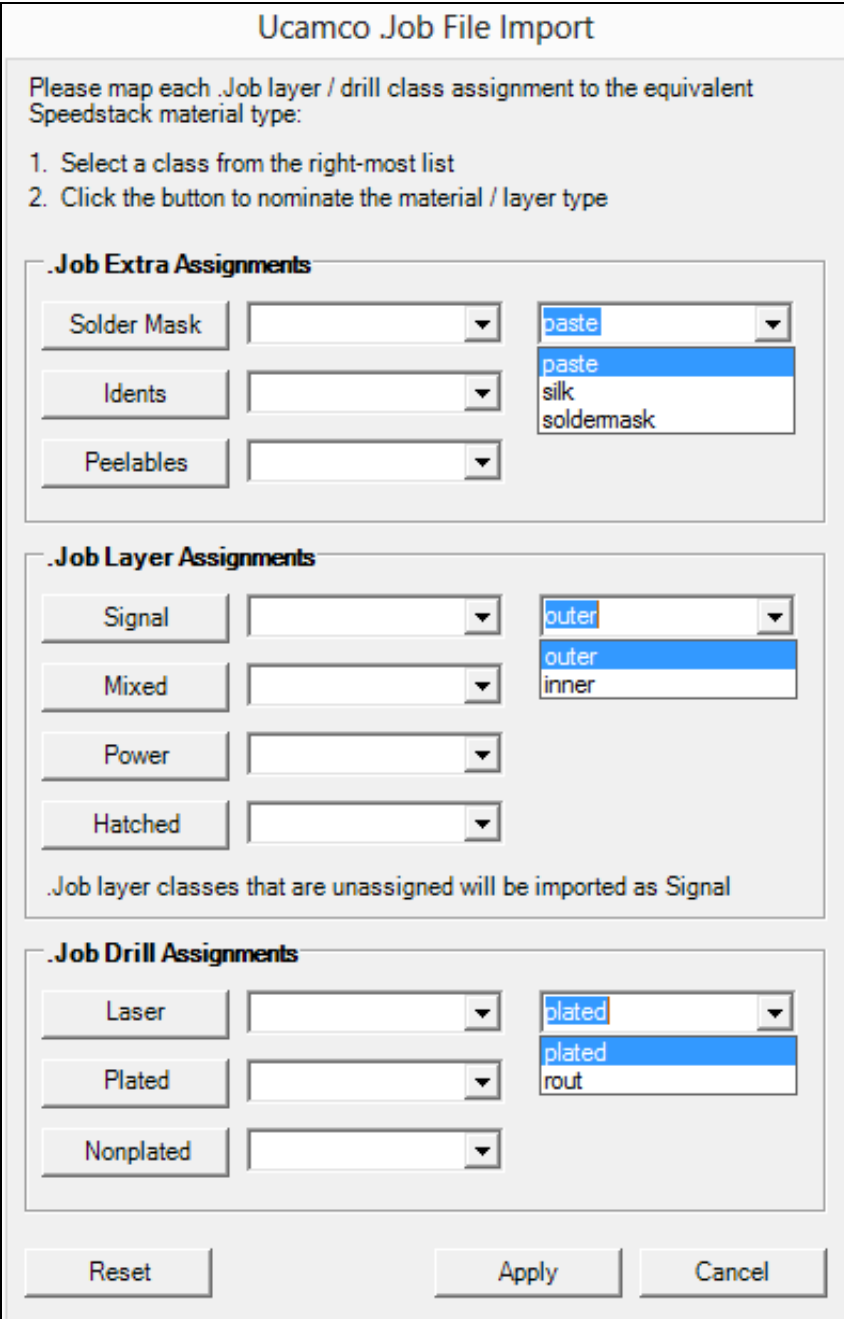

The dialog box is titled "Ucamco Job File Import". It contains instructions: "Please map each .Job layer / drill class assignment to the equivalent Speedstack material type:" followed by two steps: "1. Select a class from the right-most list" and "2. Click the button to nominate the material / layer type".

The dialog is divided into three sections:

- .Job Extra Assignments:** Contains three buttons: "Solder Mask", "Idents", and "Peelables". Each button has a dropdown menu to its right. A separate dropdown menu is open to the right, showing the options: "paste", "paste", "silk", and "soldermask".
- .Job Layer Assignments:** Contains four buttons: "Signal", "Mixed", "Power", and "Hatched". Each button has a dropdown menu to its right. A separate dropdown menu is open to the right, showing the options: "outer", "outer", and "inner". Below these buttons, a note states: ".Job layer classes that are unassigned will be imported as Signal".
- .Job Drill Assignments:** Contains three buttons: "Laser", "Plated", and "Nonplated". Each button has a dropdown menu to its right. A separate dropdown menu is open to the right, showing the options: "plated", "plated", and "rout".

At the bottom of the dialog are three buttons: "Reset", "Apply", and "Cancel".



Select the assignment options as described above and click Apply. Click Reset to clear the assignments.

#### *Clear Rules*

The Clear Rules command will delete all previously learned rules.

#### *XML files*

Choose File|Import|XML File (.stkx), select the .stkx file for import and click Open.

#### *Zuken CR-8000*


Choose File|Import|Zuken CR-8000 format, select the .stkx file for import and click Open.

#### *Ucamco Integr8tor and Ucam format (.ssx)*

Choose File|Import|Ucamco Integr8tor and Ucam format, select the .ssx file for import and click Open.

### **Exporting stackup information**

Speedstack incorporates the facility to export stack data to external programs. From the File menu choose Export To and choose the format from the Export To sub-menu.

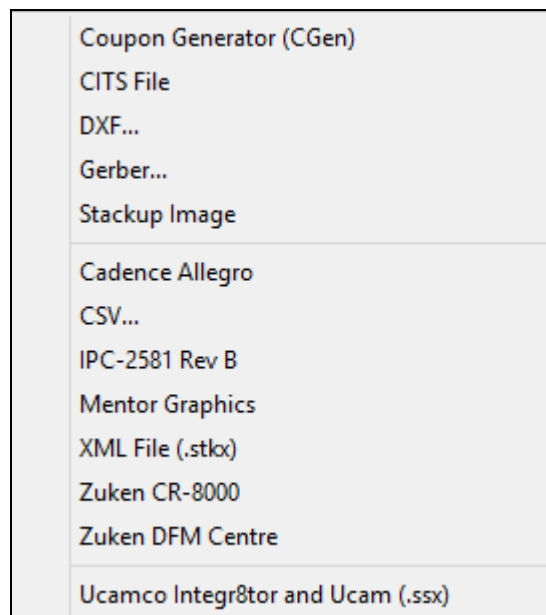


#### *Exporting to Coupon Generator (CGen)*

Stacks may be exported to the Polar CGen Coupon Generator for subsequent processing into test coupons. Click Export To|Coupon Generator – open the file in CGen.

### *Export CITS File*

Use the Export CITS File to create test files for Polar CITS controlled impedance test systems. Supply board details via the Board Details dialog.

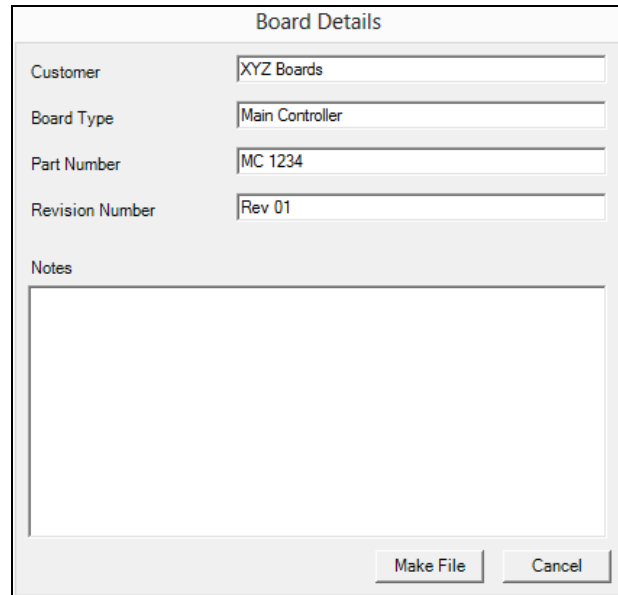

The 'Board Details' dialog box contains the following fields and controls:

- Customer:** Text input field containing 'XYZ Boards'.
- Board Type:** Text input field containing 'Main Controller'.
- Part Number:** Text input field containing 'MC 1234'.
- Revision Number:** Text input field containing 'Rev 01'.
- Notes:** A large empty text area for additional information.
- Buttons:** 'Make File' and 'Cancel' buttons at the bottom right.

Click Make File to generate .cif files (CITS test files).

### **Generating printed output**


Speedstack can generate printed output in DXF, Gerber, CSV and XML, as well as graphic image formats.

#### *DXF, Gerber, CSV and XML files*

Choose DXF..., Gerber..., CSV... or XML File and navigate to a suitable folder, name the file as appropriate and save.

#### *Stackup images*

Speedstack can export stackup images in JPEG, BMP and TIFF file formats. Select from 2D or 3D displays.

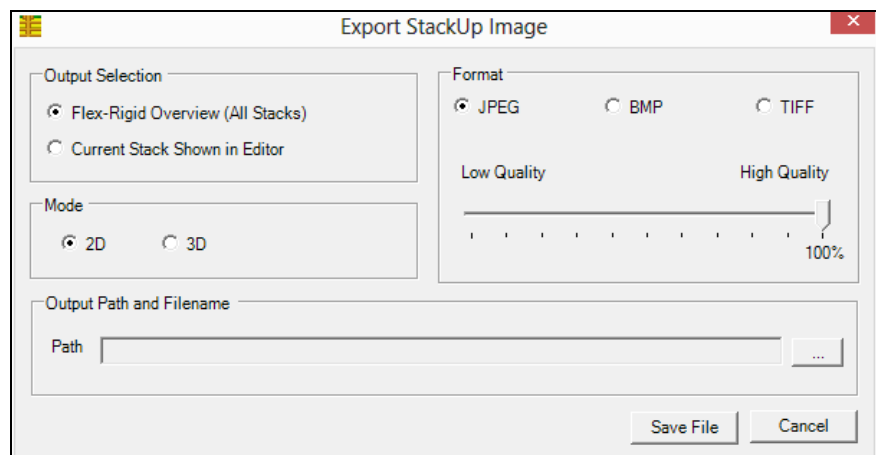

The 'Export StackUp Image' dialog box contains the following sections and controls:

- Output Selection:** Radio buttons for 'Flex-Rigid Overview (All Stacks)' (selected) and 'Current Stack Shown in Editor'.
- Mode:** Radio buttons for '2D' (selected) and '3D'.
- Format:** Radio buttons for 'JPEG' (selected), 'BMP', and 'TIFF'.
- Quality:** A slider between 'Low Quality' and 'High Quality' (100%).
- Output Path and Filename:** A text field for the path and a browse button ('...').
- Buttons:** 'Save File' and 'Cancel' buttons at the bottom right.

The Low Quality – High Quality slider specifies JPG quality.

Choose the Flex-Rigid Overview (if appropriate) to display the master stack and associated sub-stacks or Current Stack Shown in Editor. Specify the destination folder and file name and save.

#### *IPC-2581 Rev B*

Speedstack supports reading/writing in IPC-2581 Rev B formatted data. Choose the IPC-2581 Rev B option and supply the file name and destination folder

#### *Ucamco Integr8tor and Ucam*

Choose the Ucamco Integr8tor and Ucam option and supply the file name and destination folder. (Note the .ssx file extension.)

#### *Zuken DFM Centre*


The Zuken DFM Center PCB manufacturing pre-processing and CAM system integrates directly with Polar Instruments' Speedstack PCB system. Navigate to a suitable folder and save the file (XML format).

### **Assigning properties to projects and stackups**

The stack file Properties dialog may be displayed automatically each time a new stackup is created (see Tools|Options|General) and provides a range of text fields for descriptive information, e.g. stackup author, company name, file create date, stackup name, version, etc.

From the File menu choose the Properties command to add descriptive text fields — information contained in the Properties dialog will be displayed on stackup printouts.

To display the Properties dialog each time a new stackup or project is created, from the Tools menu choose Options and click the check box below on the General tab




#### *Backing up stackups and libraries*

It is strongly recommended that stackup files (assigned the .stk extension), project files (assigned the .sci extension) and library files (assigned the .mlbx extension) be backed up to a secure location.

#### *Opening recent files*

Click Recent Files to select and open a file from the most recently used file list.

## The Edit menu

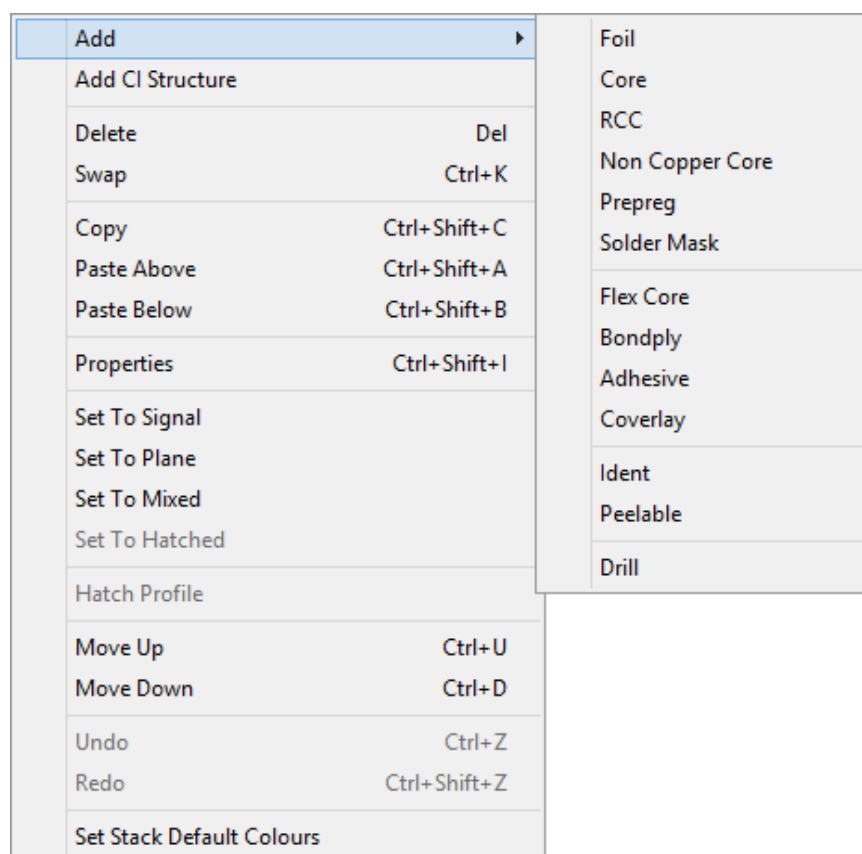

The Edit menu contains the commands necessary to create and modify board stack ups. The designer or fabricator works within the free-form stackup build and construction window and in Materials Library mode adds layers of foil, core, prepreg, etc., from the materials library.

Speedstack provides the option to switch easily between Material Library and Virtual Material modes allowing the stack designer to build and experiment with stackups (for example to examine the effects on impedance structures of different trace widths or dielectric heights) without requiring real materials to be entered into a materials library.

Controlled impedance structures can be added to the stack.

When Add CI Structure is selected Speedstack switches to the Controlled Impedance pane and allows the designer to add structures appropriate for the selected layer. The items that can be edited depend upon whether the Stack Up Editor or Controlled Impedance tab is selected.

Layers can be changed to signal, plane, mixed or hatched, moved up or down or copied and pasted, or assigned properties as required.

Use the Delete and Swap commands to delete materials or swap materials from the Materials Library.

## The View menu

Use the View menu to change the Stack Editor display whilst adding or removing materials or modifying or refining the stack.

2D View	F2
3D View	F3
Zoom In	
Zoom Out	
Zoom Extents	
Default View	
Open Navigator	F4
Find Navigator	

The View menu allows Speedstack to display the stackup in a 2-dimensional or 3-dimensional aspect.

Zoom In to get a close-up view of the stack or Zoom Out to see more of the stack at a reduced size. Zoom Extents will adjust the zoom level to display the whole stack.

Hint: Click the mouse centre button/wheel to Zoom Extents.

With the Flex HDI option installed choose the Open Navigator command to view the master and associated sub-stacks. The floating Navigator window may get covered by other application windows when switching between programs; – use the Find Navigator to display a reduced Navigator window at the top left screen corner.

## The Tools menu

Use the Tools menu to configure Speedstack.

Options	Ctrl+Shift+O
Manufacturing Constraints	Ctrl+Shift+E
Set Finishing Method	
Set Target Stack Up Thickness / Enable Finishing	
Virtual Material Mode	

The Options command displays the configuration options, manufacturing constraints, target stack thickness and finishing options. See *Configuring Speedstack* for details.

### The Units menu

Use the Units menu to select the stackup units, microns, Mils/Thous, Millimetres or Inches

	Microns	Shift+F1
	Mils/Thous	Shift+F2
<input checked="" type="radio"/>	Millimetres	Shift+F3
	Inches	Shift+F4

### External Utility

Use the External Utility commands to start a program external to Speedstack. The programs are defined in the Configuration Options|External Utilities dialog.

### The Help menu

Use the Help menu commands to access the User Guide for the current Speedstack version or tutorials relating to common Speedstack operations.

Review the licensing terms with the License and About Speedstack commands.

# Configuring Speedstack

When first run, the Speedstack environment is initialised to its factory settings. These may require adjustment before outputting a finished stackup and/or project. Default settings are changed using Tools|Options, Tools|Manufacturing Constraints and Tool|Set Finishing Options.

## Environment and default settings

From the Tools menu choose the Options command to display the Configurations Options dialog.

### General Options

Default Stack Up View

☐ 2D

☒ 3D

Display Data

Display Fields 1 and 2 are reserved for Layer Numbers and Layer Types

Display Field 3: Description

Display Field 4: None

Display Field 5: Isolation Distance

Units

☐ Mils/Thous ☒ Microns ☐ Millimetres ☐ Inches

☒ Open last used file on application start up

☒ Display File Properties Dialog for New Stackups and Projects

Choose the Default Stackup View – 2D or 3D; select the data fields that will appear alongside the stack in the Stack Editor

Display Field 3	Display Field 4	Display Field 5
Description	None	Base Thickness
Supplier	None	Finished Thickness
Supplier Description	Base Thickness	Copper Coverage
Description	Finished Thickness	Isolation Distance
Stock Number	Copper Coverage	Dielectric Constant
Type	Isolation Distance	Resin Content
	Dielectric Constant	Tg
	Resin Content	Colour
	Tg	Data Filenames

Choose the stackup units; Speedstack supports Mils/Thou, Microns, Millimetres and Inches. Click the Open last used... check box to specify that Speedstack should open the last used file on start-up.

*Note: Processed Thickness is the Finished Thickness for copper layers and Isolation Thickness for dielectric layers.*

Clicking the Display File Properties Dialog... will display the File Properties Dialog each time a new stackup or project is initiated.

### Structure Defaults

Structures	
W1 Default Trace Width	<input type="text" value="150.00"/>
W2 Default Trace Width	<input type="text" value="125.00"/>
G1 Default Trace Width	<input type="text" value="150.00"/>
G2 Default Trace Width	<input type="text" value="125.00"/>
S1 Default Trace Separation	<input type="text" value="125.00"/>
D1 Default Trace Separation	<input type="text" value="125.00"/>
O1 Default Trace Offset	<input type="text" value="0.00"/>
REr Default Resin Puddle Er	<input type="text" value="4"/>

Board Thickness	
Board Thickness	<input type="text" value="1600.00"/>
Plus %	<input type="text" value="10"/>
Minus %	<input type="text" value="10"/>

Drilling	
Minimum Hole Size	<input type="text" value="508.00"/>

When adding new controlled impedance structures default values are entered for the trace widths and separations. Use the Structure Defaults tab to specify the default structure parameters, board thickness and minimum drill hole size.

### Licensing

<input type="radio"/> No License
<input type="radio"/> Use Polar Si8000m License
<input checked="" type="radio"/> Use Polar Si9000e License
If Polar Si8000m or Si9000e has been purchased and you wish for interactivity between Speedstack and either of these products, select the appropriate license.
<input checked="" type="checkbox"/> Speedstack Flex / HDI License (SF)
<input checked="" type="checkbox"/> Hatch Mode License (XFE)
<input checked="" type="checkbox"/> Speedstack Import / Export License (IO)
<input checked="" type="checkbox"/> Speedstack / Ucamco Integration License (UCAMCO)

Use the Licensing tab to tick the purchased licensing options.

To activate the Speedstack controlled impedance function, ensure that the Si8000 or Si9000 is installed; from the Licensing tab choose either Use Polar Si8000m License or Use Polar Si9000e License option as appropriate.



## Choosing default file locations

Select default materials library file

C:\Program Files (x86)\Polar\Speedstack\Samples\Speedstack Imperial.mlbx Browse...

Select default folder to store Stack Up (\*.stk) files

C:\Program Files (x86)\Polar\Speedstack\Samples\ Browse...

Select default folder to store Material Filter (\*.mlf) files

C:\Program Files (x86)\Polar\Speedstack\Samples\Filters Browse...

Use this dialog to choose which materials library the Speedstack uses at start-up. Click the File Locations tab and use the Browse button to navigate to the library (.mlbx) file.

The File Locations tab provides for default locations for stackup or project files and Material Filter (.mlf) files. Browse to the target folders and click OK to confirm (create new folders if necessary).

## Specifying goal seeking parameters

Click the Goal Seeking tab to specify the default values for trace widths and separations used during goal seeking.

W1 Maximum Trace Width	300.00	Convergence	0.50
W1 Minimum Trace Width	125.00	Maximum Iterations	10
S1 Maximum Trace Separation	300.00		
S1 Minimum Trace Separation	125.00		
D1 Maximum Trace Separation	300.00		
D1 Minimum Trace Separation	125.00		
H Maximum Value	200.00		
H Minimum Value	50.00		

During goal seeking the calculated value for impedance will progressively converge upon the target value. In the Convergence text box specify the difference between the target impedance and the actual impedance at which goal seeking will terminate.


Use the Maximum Iterations text box to limit the number of iterations used during goal seeking.

## Setting user defaults

Information added to the User tab will be transferred to the File Properties dialog and used on printouts

Enter information as appropriate into the associated text fields; optionally, select a graphic for use as the company

logo — optimum graphic size is 180 x 32 pixels — the graphic is printed in the preview box.

<b>Default User Information</b> Used to fill in stack property fields when starting a new stack file.  Author: J Travers Company: XYZ Corp Department: Engineering Site: North Bridge	<b>Company Logo</b>  C:\Polar\Graphics\polar logo 180 x 56.jpg <input type="button" value="Browse..."/>  Recommended size for the logo is 180 pixels in width. Large images will be scaled down.  
---	---

### *Specifying default CITS test file parameters*

Speedstack allows the user to generate a CITS test file for each controlled impedance structure within the stack.

Select the CITS Test tab to specify the default test parameters to be used when initiating a CITS test file.


<b>Horizontal Units</b> Units: Inches Test From: 3 Test To: 7	<b>Channels</b> Single Ended: Channel 1 Differential: Channel 1 & 2
Test Method: Absolute	
Vertical Scale: 10	
Differential Unbalanced Warning Level: 15	

Each test file contains the test parameters (test units, distance, number of channels, etc.) to be used when testing the stack's controlled impedance structures using a Polar CITS (Controlled Impedance Test System).

The test file may be edited via the Edit Test Data dialog.


### *Choosing background and stackup layer colours*

Choose the Colours tab to change stackup component colours from their factory defaults.

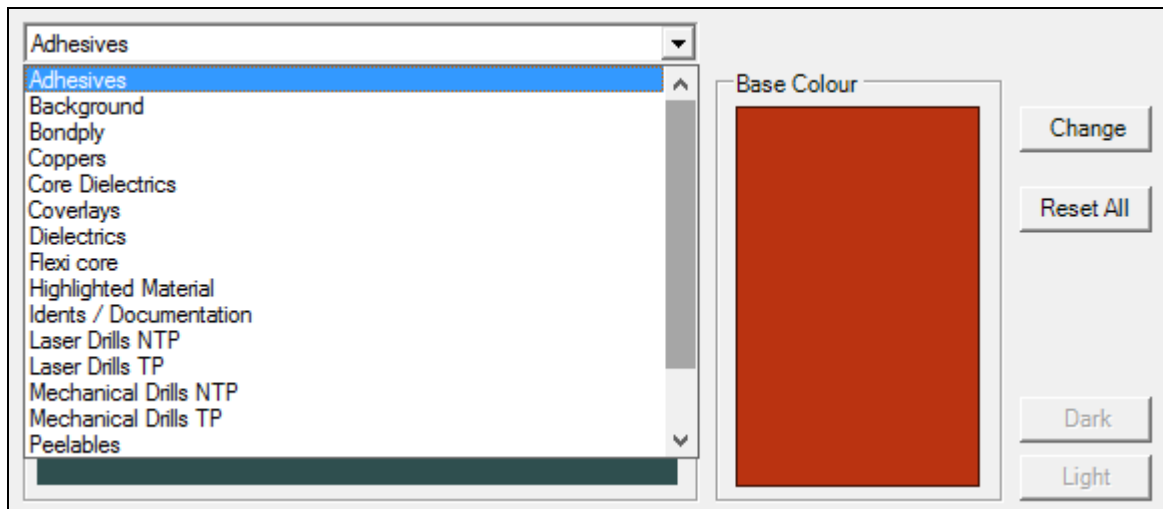


Click Reset All to return to cancel changes.

### *Miscellaneous Options*

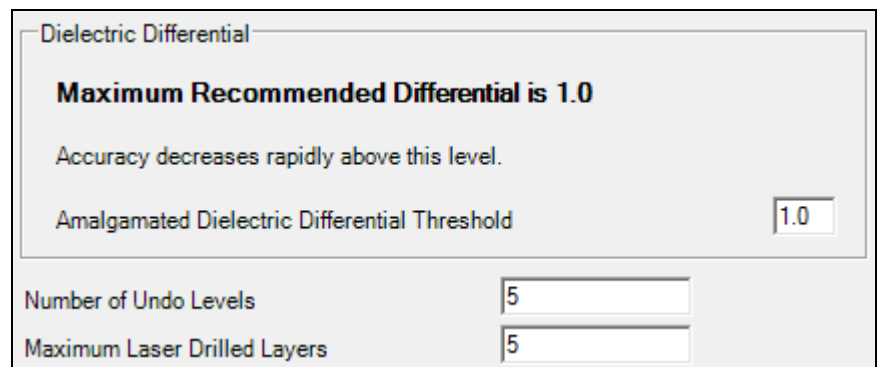

Use the Miscellaneous tab to specify the maximum Dielectric Differential when working with multiple dielectric structures; choose the number of levels of editing Undo and the maximum number of layers a laser drill can span. (Exceeding this number will produce a Drill not Valid error message.)

### *Hatch Defaults*

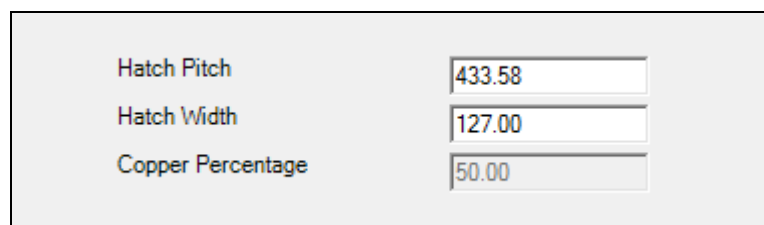

Use the Hatch Defaults tab to specify the default values for Hatch Pitch and Width and Copper Percentage when setting a plane to hatched (see Hatch Configuration.)

### Rebuild and Calculate Structures

These options control the way that the Controlled Impedance structure parameters are updated from the stack up. When new structures are added or the Rebuild and Calculate option is selected, Speedstack will update all structures based on the selections below. Default : All options selected.

☒ Substrate Height (H n)

☒ Substrate Dielectric (Er n)

☒ Trace Thickness (T1)

☒ Coating Above Substrate (C1)

☒ Coating Dielectric (CEr)

The Rebuild and Calculate Structures tab allows the designer to specify which parameters are included when controlled impedance structures are recalculated after modifying the stack.

### Manufacturing Constraints

The Manufacturing Constraints options consist of a collection of manufacturing capabilities, minimum gaps and trace widths, buried and blind via and trace aspect ratios, drill aspect ratios, etc. that can be applied during design rule checking (see below.)

☒ Manufacturing Tests

☒ Min. Trace Width ☒ Min. Gap Width

Aspect Ratios

☒ Mechanical Drill ☒ Buried Laser Microvia

☒ Blind Laser Microvia ☒ Trace

☐ Excess Resin

They will normally refer to differing levels of technology offered by one or more PCB manufacturers for a range of prices. The required information (shown in the example below) can normally be obtained from the manufacturer.

Manufacturing Constraints								
	Manufacturer's Name	Blind Laser Via A. R.	Buried Laser Via A. R.	Mechanical Drill A. R.	Minimum Gap	Minimum Trace Width	Trace A. R.	Units
►	Polar Microns	0.5	0.5	8.5	75	75	1	Microns
	Polar Mills	0.5	0.5	8.5	3	3	1	Mils
	Polar Millimetres	0.5	0.5	8.5	0.075	0.075	1	Millimetres
	Polar Inches	0.5	0.5	8.5	0.003	0.003	1	Inches

Current Active Constraint

Highlight


Set New

Close

Click the Highlight button to highlight the current active constraint; to apply a new constraint select the constraint row and click Set New.

### *Editing and adding constraints*

To modify a constraint or add a new constraint, double click within the constraint row to be edited.

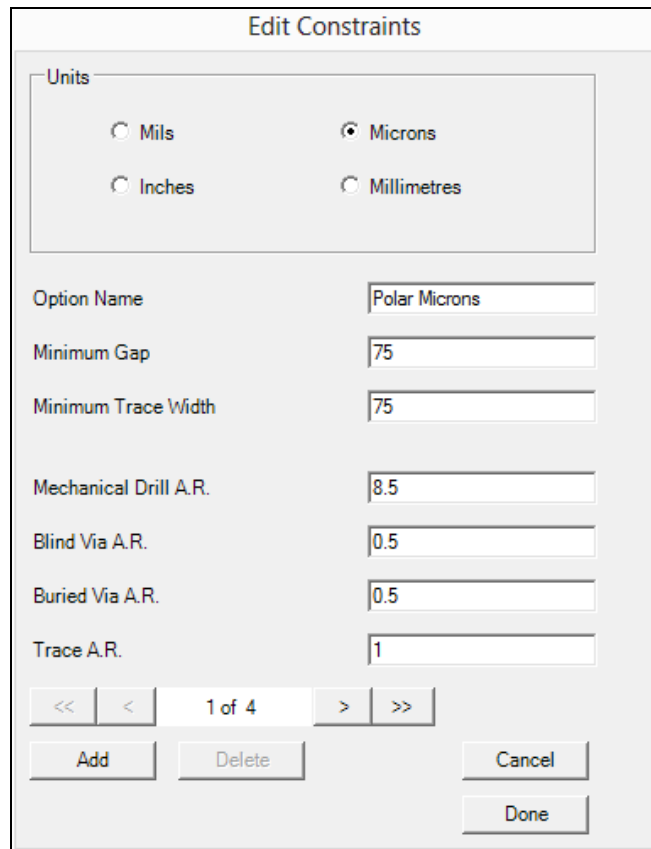


The 'Edit Constraints' dialog box is shown. It has a title bar 'Edit Constraints'. Inside, there is a 'Units' section with four radio buttons: 'Mils', 'Microns' (selected), 'Inches', and 'Millimetres'. Below this are several input fields with labels: 'Option Name' (containing 'Polar Microns'), 'Minimum Gap' (containing '75'), 'Minimum Trace Width' (containing '75'), 'Mechanical Drill A.R.' (containing '8.5'), 'Blind Via A.R.' (containing '0.5'), 'Buried Via A.R.' (containing '0.5'), and 'Trace A.R.' (containing '1'). At the bottom, there is a navigation bar with '<<', '<', '1 of 4', '>', and '>>' buttons. Below the navigation bar are three buttons: 'Add', 'Delete', and 'Cancel'. At the very bottom right is a 'Done' button.

Modify each setting as required; click Done to confirm the settings and close the dialog.

To add a new constraint click the Add button, fill in the settings fields and click Done to finish. The new constraint will be added to the table of current constraints. Click the Delete button to remove the constraint from the list.

## Set Target Stackup Thickness/Enable Finishing


Set the Target Stackup Thickness and tolerances via the dialog below.

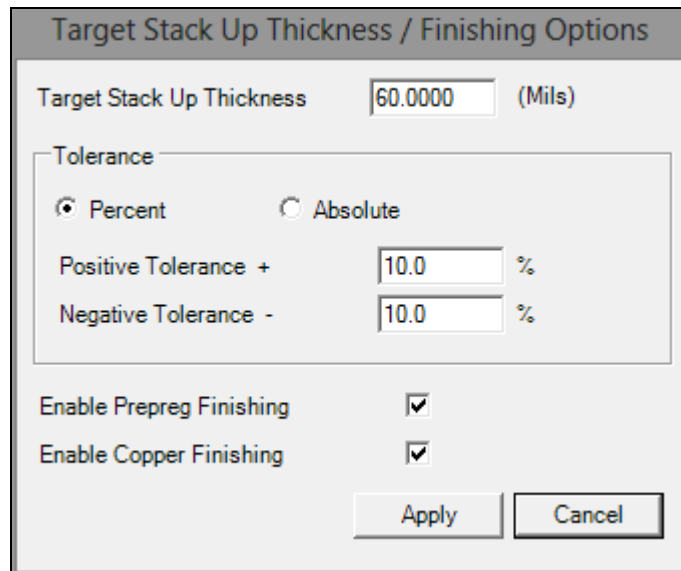

The dialog box is titled "Target Stack Up Thickness / Finishing Options". It contains the following fields and controls:

- Target Stack Up Thickness:** A text box containing "60.0000" followed by "(Mils)".
- Tolerance:** A section containing two radio buttons: "Percent" (selected) and "Absolute".
- Positive Tolerance +:** A text box containing "10.0" followed by "%".
- Negative Tolerance -:** A text box containing "10.0" followed by "%".
- Enable Prepreg Finishing:** A checked checkbox.
- Enable Copper Finishing:** A checked checkbox.
- Buttons:** "Apply" and "Cancel" buttons at the bottom right.

Tolerance may be set in terms of percentage or absolute values:

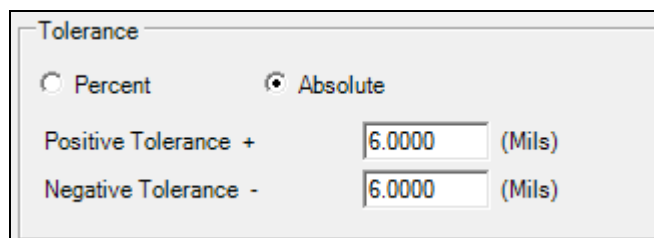

This is a close-up of the "Tolerance" section of the dialog box. It shows the "Absolute" radio button selected. The fields are:

- Positive Tolerance +:** A text box containing "6.0000" followed by "(Mils)".
- Negative Tolerance -:** A text box containing "6.0000" followed by "(Mils)".


Note that positive and negative tolerance values can be set independently. The values should reflect the currently selected units.

To enable prepreg and/or copper finishing tick the associated check boxes. Click Apply.

*Note: Unchecking the Enable Finishing options disables the Apply and Reset Finishing buttons. Note that these buttons are only available in Materials Library Mode – they are disabled in Virtual Material Mode.*

## Finishing Options


From the Tools menu choose the Set Finishing Method command to display the set finishing corrections dialog. Speedstack offers two methods: Copper Coverage Method and Simple Percentage Method.

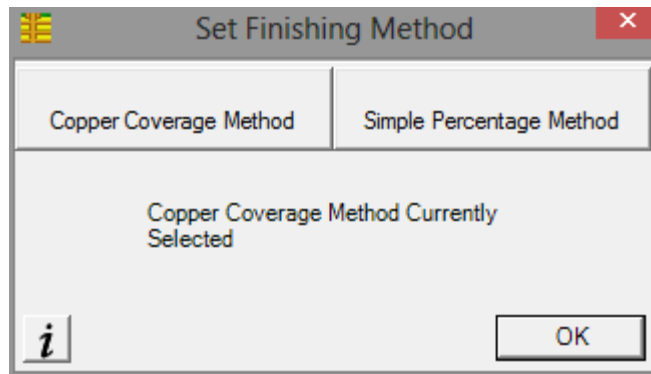

Each method requires that the amount of copper to be added where plating is required be set. In addition, where the Excess Resin design rule check is used the minimum acceptable value must be set.

### *Simple Percentage Method*

The Simple Percentage Method allows the user to set the percentage of prepreg base height, which will be used to determine the isolation distance. The percentage is set for each electrical layer type pair.

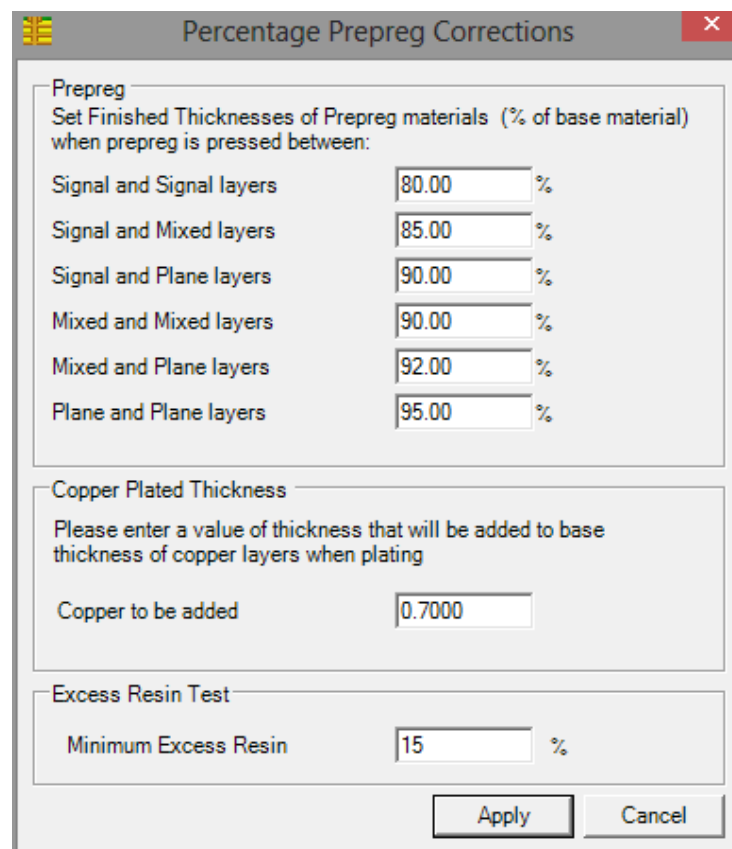

### *Copper Coverage method*

The Copper Coverage method allows the user to set the amount of copper that will be embedded into the prepreg.

This can be set as a single value for each electrical layer type. Alternatively the amount of copper embedded will be calculated on an electrical layer by layer basis dependent upon the copper coverage for the layer set in the properties window. The greater the copper coverage the smaller the amount of copper that is embedded.

**Copper Coverage Based Prepreg Corrections**

Percentage Copper To Be Embedded in Prepreg

☒ Set by Layer type

Signal Layer	%	75
Mixed Layer	%	15
Plane Layer	%	5

☐ Proportional to Coverage

**Copper Finishing**

Please enter a value of thickness that will be added to base thickness of copper layers when plating

Copper to be Added: 0.7000

**Excess Resin Test**

Minimum Excess Resin: 15

Apply Cancel

*Note: The two methods of finishing are not compatible with each other. The Copper Coverage method requires that the finished thickness of prepreps be entered in the library; that value stays locked in the stack unless the Simple Percentage method is set up; if Reset Finishing is then clicked the finished thickness reverts to the base thickness.*


### *Virtual Material mode*

The Virtual Material Mode command toggles between Virtual Material and Material Library modes.

*Note: Switching to Virtual Material Mode disables the Apply and Reset Finishing buttons.*

*Note: Virtual Material mode and the Simple Percentage method of finishing are not compatible. Speedstack displays the message below if the two are selected simultaneously.*



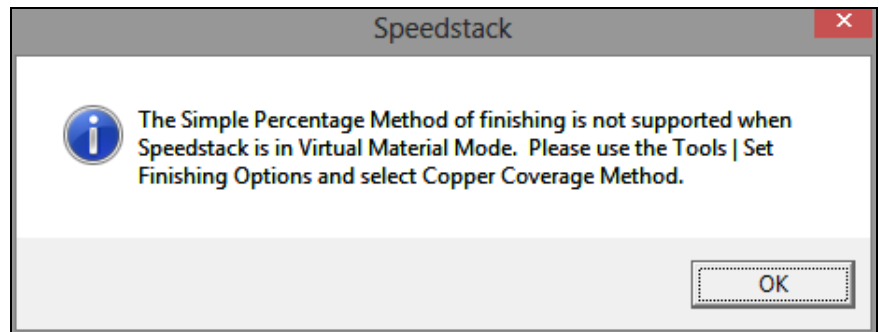

### *Working with external utilities*

Speedstack can call an external program / utility / script via the External Utilities menu options. The menu items are configured via Configuration Options|External Utilities.

1	<input type="text"/>	<input type="button" value="Choose"/>	<input type="button" value="Clear"/>
2	<input type="text"/>	<input type="button" value="Choose"/>	<input type="button" value="Clear"/>
3	<input type="text"/>	<input type="button" value="Choose"/>	<input type="button" value="Clear"/>
4	<input type="text"/>	<input type="button" value="Choose"/>	<input type="button" value="Clear"/>
5	<input type="text"/>	<input type="button" value="Choose"/>	<input type="button" value="Clear"/>

To specify a program click Choose and navigate to the program and click Open. The program will be added to the External Utility menu.

## The Speedstack toolbar

The Speedstack toolbar comprises shortcut links to the most popular commands.



Note: toolbar buttons will be enabled/disabled depending on whether Speedstack is performing stack editing or controlled impedance calculations. Pause the mouse over each tool button to display the tool's screen tip

### *File operations*



Create new stackup



Library mode



Virtual Material mode



Stackup Wizard

### *Stack building operations*



Symmetrical Mode off



Symmetrical Mode on



Mirroring Mode



Add layer to the stackup

Click to select the layer type. The list of layer types is displayed in the associated sub-menu.

Layers available include:

Foil	Add foil layer to the stackup
Core	Add core layer
RCC	Add resin coated copper layer
Non-Copper Core	Add non-copper core
Prepreg	Add prepreg layer
Soldermask	Add solder mask
Flexible core	Add flexible core layer

Bondply	Add bond ply adhesive
Adhesive	Add Adhesive
Coverlay	Add coverlay layer
Ident	Add screened ident layer
Peelable	Add peelable mask



Add mechanical/laser drill between layers

### *Editing the stackup*



Delete selected stackup material or drill



Swap selected material

*Note: the Copy and Paste buttons below are only enabled for the Stack Editor and DRC tabs – they are disabled for the Controlled Impedance and CI Results tabs.*

### *Copying and pasting materials*



Copy material of the selected layer



Paste material above selected layer



Paste material below selected layer



Copy material properties



Paste material properties

### *Changing plane types*



Set the selected electrical layer as a signal layer



Set the selected electrical layer as a plane



Set the selected electrical layer as a mixed signal/plane layer



Set the selected electrical layer as a hatched plane

*Note: the Move Selected Layer buttons below are only enabled for the Stack Editor and DRC tabs – they are disabled for the Controlled Impedance and CI Results tabs*



Move selected layer up one layer



Move selected layer down one layer



Display properties dialog for the selected layer or drill

*Note: the Apply and Reset Finishing buttons below are only enabled for the Materials Library Mode with the Prepreg and Copper Finishing Options checked (see Set Target Stack Up Thickness/Finishing Options) – they are disabled for the Virtual Materials Mode.*

#### *Applying finishing*



Apply finished thickness



Reset finished thickness

#### *Changing the stackup view*



Display 2-dimensional view



Display 3-dimensional view

#### *Managing the materials library*



Go To/Display materials library

#### *Exchanging data with the Si8000 or Si9000 Field solver*



Copy controlled impedance data to field solver



Paste controlled impedance data from field solver



Re-engineer current stack

## Creating and editing stackups (Virtual Material mode)

Speedstack provides the option of switching easily between Material Library and Virtual Material modes allowing the stack designer to build and experiment with stackups (for example to examine the effects on impedance structures of different trace widths or dielectric heights) without requiring real materials to be entered into a materials library.

In Virtual Material mode the Stackup Wizard allows rapid entry of stack details, the number of layers, overall board thickness, plane layers, etc., along with solder mask and copper thickness. Speedstack will then build a stack to the specified board thickness by distributing the dielectric regions equally. If a preferred core thickness is specified the software will maintain the dielectric thickness for core regions but then equally distribute prepreg regions to reach the target board thickness.

This section will describe the steps to construct an 8-layer, symmetrical FR-4 stack to the specification below using Speedstack's Virtual material Mode.

Thickness:	60 mil
Signal layers:	1, 3, 6, 8
Plane layers:	2, 4, 5, 7
Er:	4.2
Preferred core thickness:	8 mil
Copper (all layers):	1 oz. / 1.4 mil
LPI Mask:	1 mil
PTH drill passes:	Layers 1 – 8
Laser microvia passes:	Layers 1 – 2, 8 – 7
Impedance structures:	SE 50 Ohm Layer 1, Diff 100 Ohm Layer 1

From the Units menu choose Mils/Thou From the Tools menu toggle Virtual Material Mode On.

Options	Ctrl+Shift+O
Manufacturing Constraints	Ctrl+Shift+E
Set Finishing Options	
Set Target Stack Up Thickness / Finishing Options	
<input checked="" type="checkbox"/> Virtual Material Mode	



Library/Virtual Material mode indicates Virtual Material mode.

## Using the Stackup Wizard

From the File menu chose New|Stackup Wizard.

### *Setting basic stack data*

Fill in the dialog as shown below.

The Stack Up Wizard (Virtual Material Mode) dialog box is shown. It contains the following fields and options:

- Number of Layers: 8
- Target Stack Up Thickness: 60.0000
- Positive Tolerance %: 10
- Negative Tolerance %: 10
- Symmetrical: ☒
- Plane Layers: 1, 2, 3, 4, 5, 6, 7, 8 (all selected)
- Mixed Layers: 1, 2, 3, 4, 5, 6, 7, 8 (all empty)
- Nominal Dielectric Constant: 4.2
- Solder Mask Top: ☒
- Solder Mask Bottom: ☒
- Solder Mask Dielectric Constant: 4
- Solder Mask Thickness: 1.0000
- Preferred Core Thickness: Select (dropdown)
- Copper Thickness: 0.7000
- Build Type: ☒ Foil, ☐ Core, ☐ Sequential/HDI
- Buttons: <Previous, Next >, Finish, Cancel

Click Next to add drills.

### *Adding drills*

Select Column 1 and specify the First Electrical Layer as Layer 1 and the Second Electrical Layer as Layer 8; choose Mechanical, Through Plated with No Fill and click Add to add the first drill to the stack.


The Add Drills dialog box is shown. It contains the following fields and options:

- Electrical Layers: Column 1, First Electrical Layer No 1, Second Electrical Layer No 8
- Drill Information: ☒ Mechanical, Fill Type No Fill, ☐ Laser, ☐ Laser (Stacked), ☒ Through Plated, Data Filenames (empty)
- Hole Information: Hole Count 0, Different Hole Sizes 0, Minimum Hole Size 0.0000
- Buttons: Delete Last, Delete All, Add, <Previous, Finished, Cancel

The right side of the dialog shows a visual representation of the PCB stackup with a vertical drill hole passing through the layers.

### *Adding microvias*

Choose Column 2, specify the First Electrical Layer as 1 and the Second Electrical layer as 2; choose Laser with No Fill and click Add. Repeat the process to add another microvia to Column 2 between electrical layers 8 and 7 (shown below.)

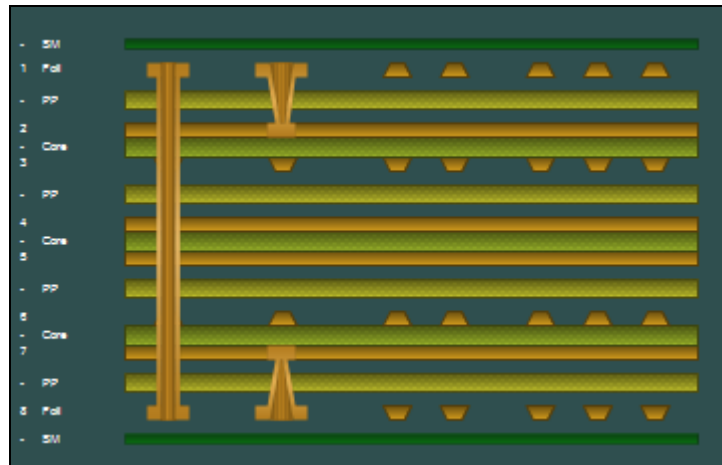

Click Finished.

The Stackup Wizard displays the New Stackup File Properties dialog; enter the (optional) stackup properties.

New Stackup File Properties

The fields below are optional

Descriptive Stackup Name: M-Board V Stack

Stack Top Side Label:

Stack Bottom Side Label:

Date Created: 07/10/2013

Version: Rev 000

Revision: Show/Hide Revision Information

Author: JM

Company: Polar

Department: Engineering


Site: North Ind Estate

Associated Documents:


Ok Skip

Click OK to close the dialog and edit the stack. Speedstack builds the stack to achieve the specified board thickness.

Click the 2D button to assist in visualisation while editing the stack.

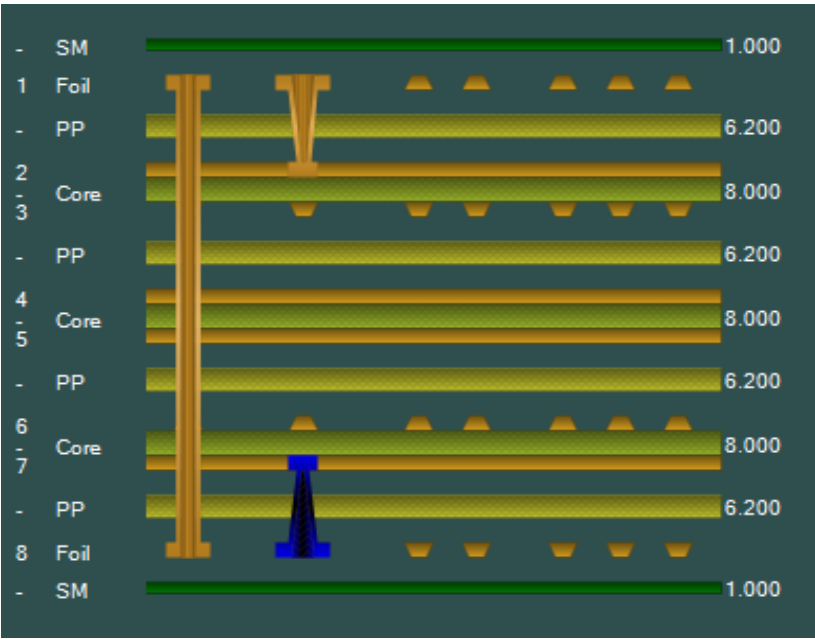

Use the View menu to zoom in and out of the stack.



Hint: Click the mouse wheel in the Stack Editor (Zoom Extents) to view the entire stack.

The Stackup Editor displays summary information for the whole stack and for items within the stack as they are selected.

Stack Up Information	
Field	Value
Electrical Layer Count	8
Stack Up Cost	0.00
Copper Thickness	11.0236
Dielectric Thickness	51.9685
Solder Mask Thickness	1.9685
=====	=====
Target Stack Up Thickness	62.9921
Stack Up Thickness	62.9921
Stack Up Thickness with Soldermask	64.9606
=====	=====



Selected Item Information : Drill	
Field	Value
First Electrical Layer No	8
Second Electrical Layer No	7
Mechanical Drill	False
Laser Drill	True
Fill Type	No Fill
Data Filenames	
Hole Count	0
Different Hole Sizes	0
Minimum Hole Size	0.001
Minimum Allowable Hole Size	15.2000

### Editing the stack

With the “virtual” stack in the Stack Editor the stack can be changed as required.

#### *Changing material properties*

To change the properties of a material, right click the material in the stack and choose Properties; fill in the text fields with the associated information and click Apply. Most material properties can be changed, including the material descriptions, base and finished thickness, dielectric constants, drill parameters along with the graphical colours.

#### *Choosing Symmetrical mode*



*Symmetrical OFF*



*Symmetrical ON*

Stackups are often designed symmetrically to prevent warping and twisting – using similar materials in the top and bottom halves of the stack. Clicking the Symmetrical button will toggle the Symmetrical mode on or off. In Symmetrical mode the stack editing functions will process materials in the upper and lower halves of the stack simultaneously.

#### *Changing the material description*

In this example stack, ensure symmetrical mode is selected then right click the solder mask material in the stack to display the Solder Mask Properties dialog.

**Solder Mask Properties**

Main | Notes

**General Information**

Supplier:

Supplier Description:

Description:

Stock Number:

Type:

**Solder Mask**

Thickness:  Dielectric Constant:

Mask Colour:  Graphical Colour:


Data Filename:

Apply Cancel Close

Change the Solder Mask Description to Liquid Photo Imageable (LPI).

Description:

The change on the Description in both solder masks is reflected in the Editor window.

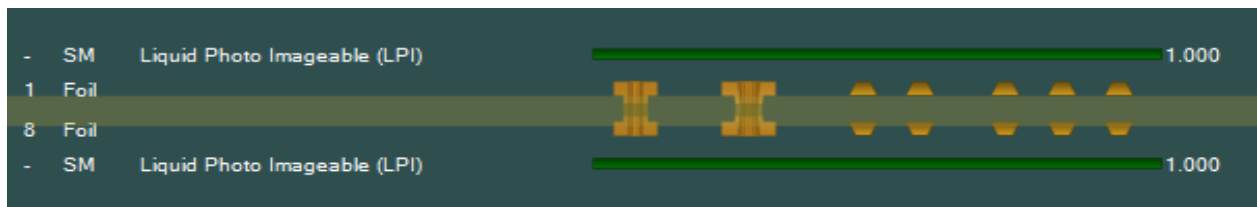

### *Changing electrical layers*

Electrical layer types may be changed from plane to signal, mixed and hatched. Right click the layer to be changed and choose from Signal, Plane, Mixed or Hatched.

Set to Signal

Set to Plane

Set to Mixed

Set to Hatched


Speedstack will take the designated layer type into consideration when adding controlled impedance structures.

### Setting hatched planes




Set Layer to Hatched Plane

With the XFE option Speedstack supports hatched planes, implementing the same crosshatch calculation technique used in the Si8000m / Si9000e. If a crosshatch plane is required click Set Layer to Hatched Plane –use the Hatch Configuration dialog to set hatch pitch and width or set the hatch width by percentage copper area. Click Apply.

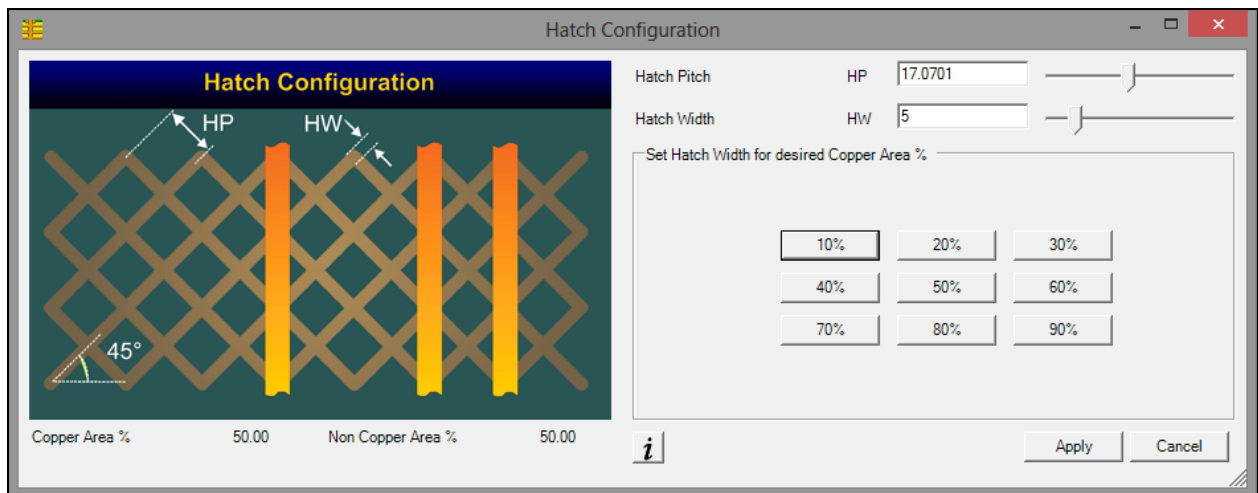


### Adding controlled impedance structures

To add controlled impedance structures, click the Controlled Impedance tab, select the copper layer (in this example, Layer 1) and click the Add New Structure button.

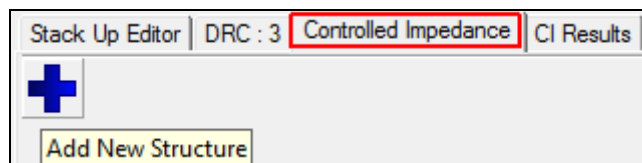

Speedstack suggests structures valid for the layer based on the plane layer types.

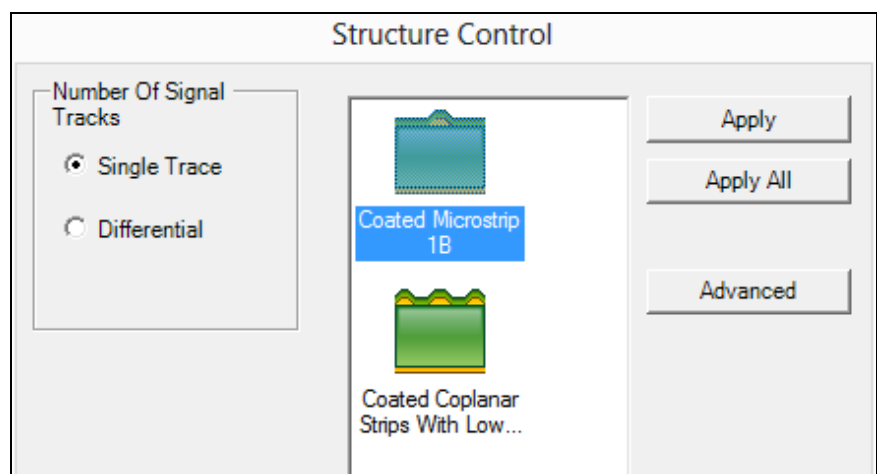


For this example, choose a 50 Ohm single ended coated microstrip; leave the tolerance at 10%; click Apply then Done.




Structure on Layer

The new structure is shown in the stack, highlighting the materials employed by the structure.

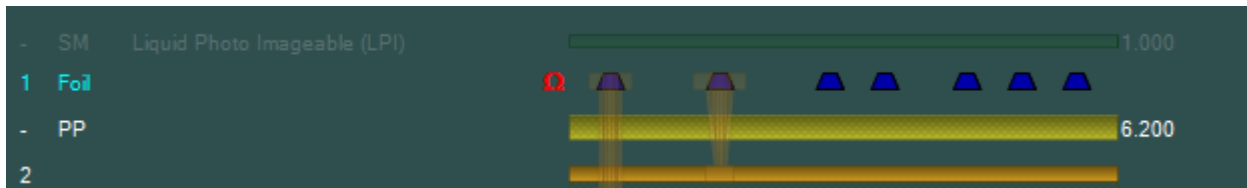


The structure also appears in the Controlled Impedance panel, along with its parameters.

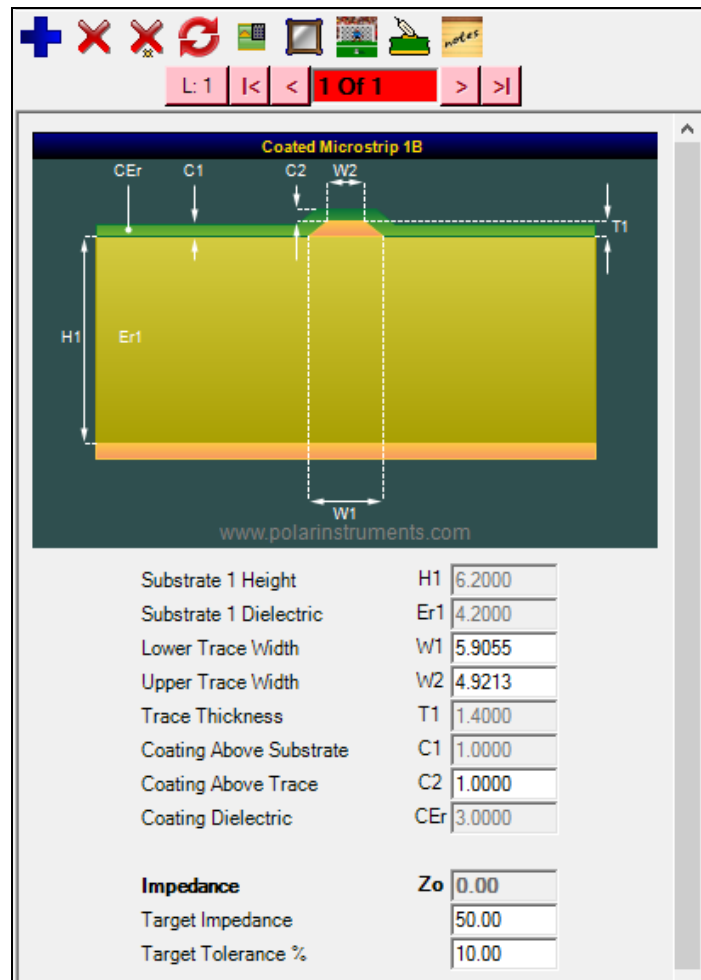

### Calculating the structure impedance

Parameters calculated from the stack materials, such as the substrate height and dielectric are read only and shown greyed out; other parameters may be edited. If the editable parameters are known they may be entered directly. For example, modify W1 to read 10.5 and W2 to read 9.5 and click the Rebuild and Calculate All Structures

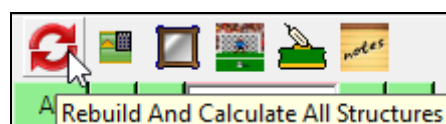

The impedance is calculated as 50.52 Ohms

<b>Impedance</b>	<b>Zo</b>	50.52
Target Impedance		50.00
Target Tolerance %		10.00



Goal Seek button

### Goal Seeking the target impedance

Speedstack can adjust one or more structure parameters to achieve a specified target impedance. Leave the Target Impedance at 50 Ohms and click the Goal Seek button

From the Set Up Goal Seek dialog choose W1/W2 only

**Set Up GoalSeek**

Goal Seeking Parameter(s)

- ☒ W1/W2 only
- ☐ S1 only
- ☐ D1 only
- ☐ W1/W2 Constant Pitch
- ☐ H1 Only
- ☐ H2 Only
- ☐ H3 Only
- ☐ H4 Only

Click OK – Speedstack adjusts trace width (below) to achieve the target 50 Ohm impedance.


Substrate 1 Height	H1	6.2000
Substrate 1 Dielectric	Er1	4.2000
Lower Trace Width	W1	10.7037
Upper Trace Width	W2	9.7037
Trace Thickness	T1	1.4000
Coating Above Substrate	C1	1.0000
Coating Above Trace	C2	1.0000
Coating Dielectric	CEr	3.0000
<b>Impedance</b>	<b>Zo</b>	50.02
Target Impedance		50.00
Target Tolerance %		10.00

With the impedance in tolerance the navigation buttons display green.



### *Mirroring structures*

This example stack is symmetrical so structures may be copied to the lower half of the stack (i.e. on the lower outer layer.) Click Mirror Structures if Stack Symmetrical.

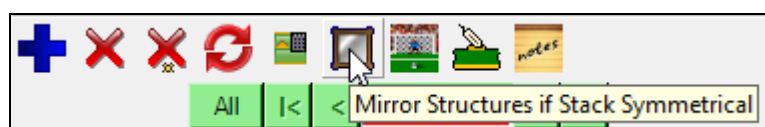


The impedance structure on Layer 1 is copied to Layer 8.

### *Rebuilding the stack*

During stack editing changes to the stack (for example, inserting prepreg materials into a layer or altering the existing material thickness) will affect the impedance value of one or more structures. If Speedstack senses that an impedance structure has changed it issues a Rebuild alert.



Click Rebuild and Calculate All Structures – Speedstack recalculates the impedance for the new parameters. If the impedance value is out of tolerance the structure browse control changes colour to red.

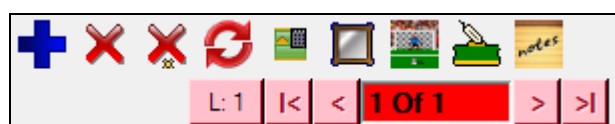

Virtual Material mode allows the designer to experiment with material properties to examine the effects on impedance structures of different trace widths or dielectric heights, etc. Materials may be added, moved, copied, pasted or removed and the properties of materials changed – Speedstack will sense the changes and allow the “generic” stack to be rebuilt and recalculated.

## Creating and editing stackups (Material Library mode)


This section describes creating stackups using the Material Library mode. Stackups may be created manually using the Stackup Wizard or using the editing window. Ensure Tools|Virtual Material Mode is toggled Off.

### Using the Stackup Wizard



*Stackup Wizard button*

The Stackup Wizard guides the user through the process of creating complex stackups in only a few steps. Click the Stackup Wizard button or choose Stackup Wizard from the File|New sub menu. The stackup editing window is cleared and the Stackup Wizard displayed.

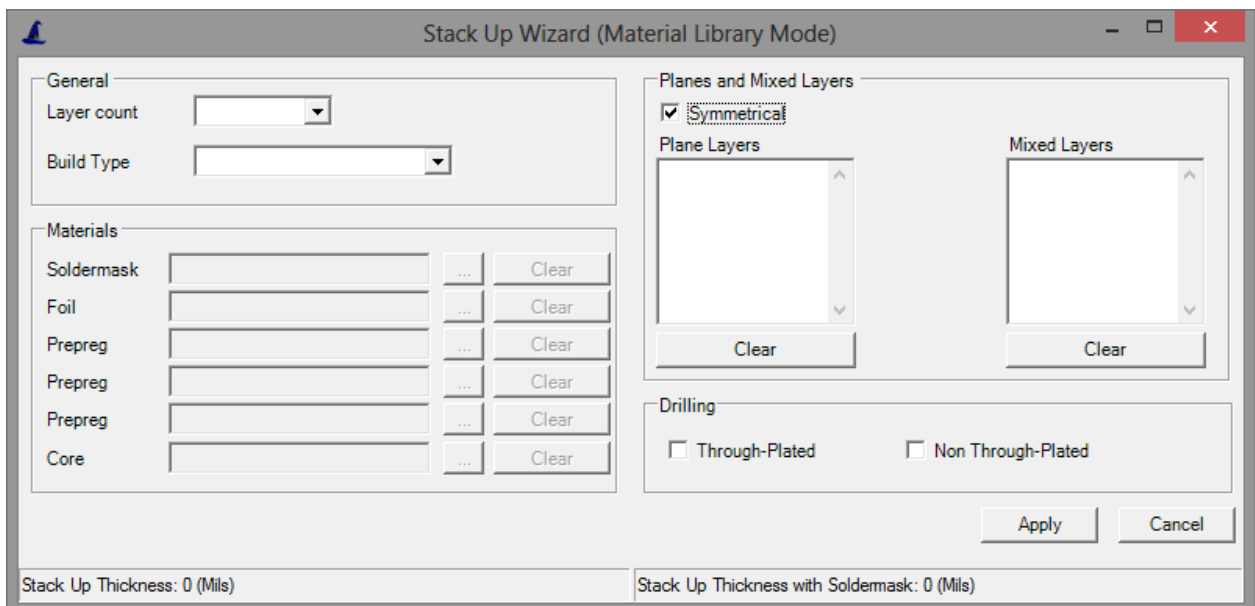The image shows the 'Stack Up Wizard (Material Library Mode)' dialog box. It has a title bar with a wizard icon and standard window controls. The dialog is divided into several sections: 'General' with 'Layer count' and 'Build Type' dropdowns; 'Materials' with a table for Soldermask, Foil, and three Prepreg layers, each with a text input, a browse button (...), and a 'Clear' button; 'Planes and Mixed Layers' with a 'Symmetrical' checkbox and two empty list boxes for 'Plane Layers' and 'Mixed Layers', each with a 'Clear' button; and 'Drilling' with 'Through-Plated' and 'Non Through-Plated' checkboxes. At the bottom are 'Apply' and 'Cancel' buttons. A status bar at the very bottom shows 'Stack Up Thickness: 0 (Mils)' and 'Stack Up Thickness with Soldermask: 0 (Mils)'.


Using the Wizard the user can specify the layer count and build type, stackup materials, planes and drill types in a single operation.

#### *Electrical layer count*

Begin by specifying the electrical layer count — up to 64 electrical layers may be specified. Choose the number of layers from the drop down list box.

#### *Build type*


Choose the build type (Foil or Core) from the drop down list box. Core builds contain only core materials; most builds will be foil builds — containing internal layers of cores with two outer foils.

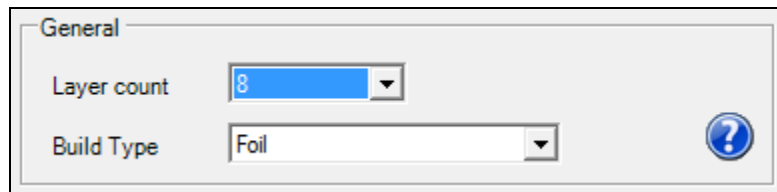

### Choosing stackup materials

Note; if Core build type has been specified the Foil material control will be disabled.

The Wizard allows for a stack comprising solder mask, foil, and cores with up to three prepreg materials between.

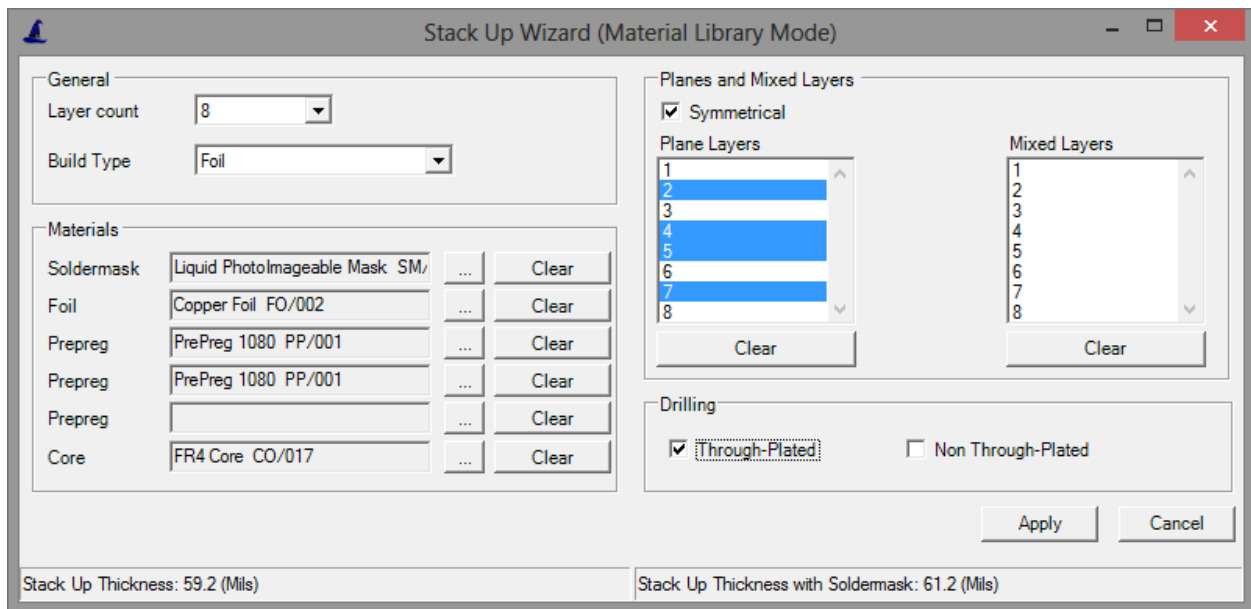

The Wizard displays a running total of the stackup thickness in the Wizard's status bar.



### Adding layers

To include a layer (in this example a foil layer) click the Foil Add Material button; the library of foil materials is displayed. Choose the foil material from the list and click the Add Material Above button; the material is added as a foil layer to the stackup.

	Supplier	Supplier Description	Description	Stock Number	Cu Base Thickness	Type
►	Polar Samples	FO/004	Copper Foil 0.7	100-004	0.7	Copper
	Polar Samples	FO/002	Copper Foil 1.4	100-002	1.4	Copper
	Polar Samples	FO/003	Copper Foil 2.8	100-003	2.8	Copper
	Polar Samples	FO/005	Copper Foil 0.7	100-005	0.7	Copper
	Polar Samples	FO/006	Copper Foil 1.4	100-006	1.4	Copper
	Polar Samples	FO/006	Copper Foil 2.8	100-006	2.8	Copper



Repeat the procedure for prepreg and core materials and the (optional) solder mask layers. Use the Clear button to remove a layer from the stackup.

Materials			
Soldermask	Liquid PhotoImageable Mask SM/	...	Clear
Foil	Copper Foil FO/002	...	Clear
Prepreg	PrePreg 1080 PP/001	...	Clear
Prepreg	PrePreg 1080 PP/001	...	Clear
Prepreg		...	Clear
Core	FR4 Core CO/017	...	Clear

### *Nominating power planes and mixed layers*

Use the list boxes to specify planes as power planes or layers as mixed layers. Select all planes as required. To remove a plane from the list select the plane number from the list and click Clear.

Planes and Mixed Layers	
<input checked="" type="checkbox"/> Symmetrical	
<b>Plane Layers</b> <div>1</div> <div>2</div> <div>3</div> <div>4</div> <div>5</div> <div>6</div> <div>7</div> <div>8</div>	<b>Mixed Layers</b> <div>1</div> <div>2</div> <div>3</div> <div>4</div> <div>5</div> <div>6</div> <div>7</div> <div>8</div>
Clear	Clear

The dialog above shows Layers 2, 4, 5 and 7 specified as power planes


### *Adding drill information*

To add a drill between electrical layer 1 and the last layer click the Through-Plated and Non-Through-Plated check boxes as required.

Drilling	
<input checked="" type="checkbox"/> Through-Plated	<input type="checkbox"/> Non Through-Plated
?	

With all build options specified click Apply to complete the stackup. The finished stackup appears in the Editor window.

The example stack below included two prepreg materials between layers.

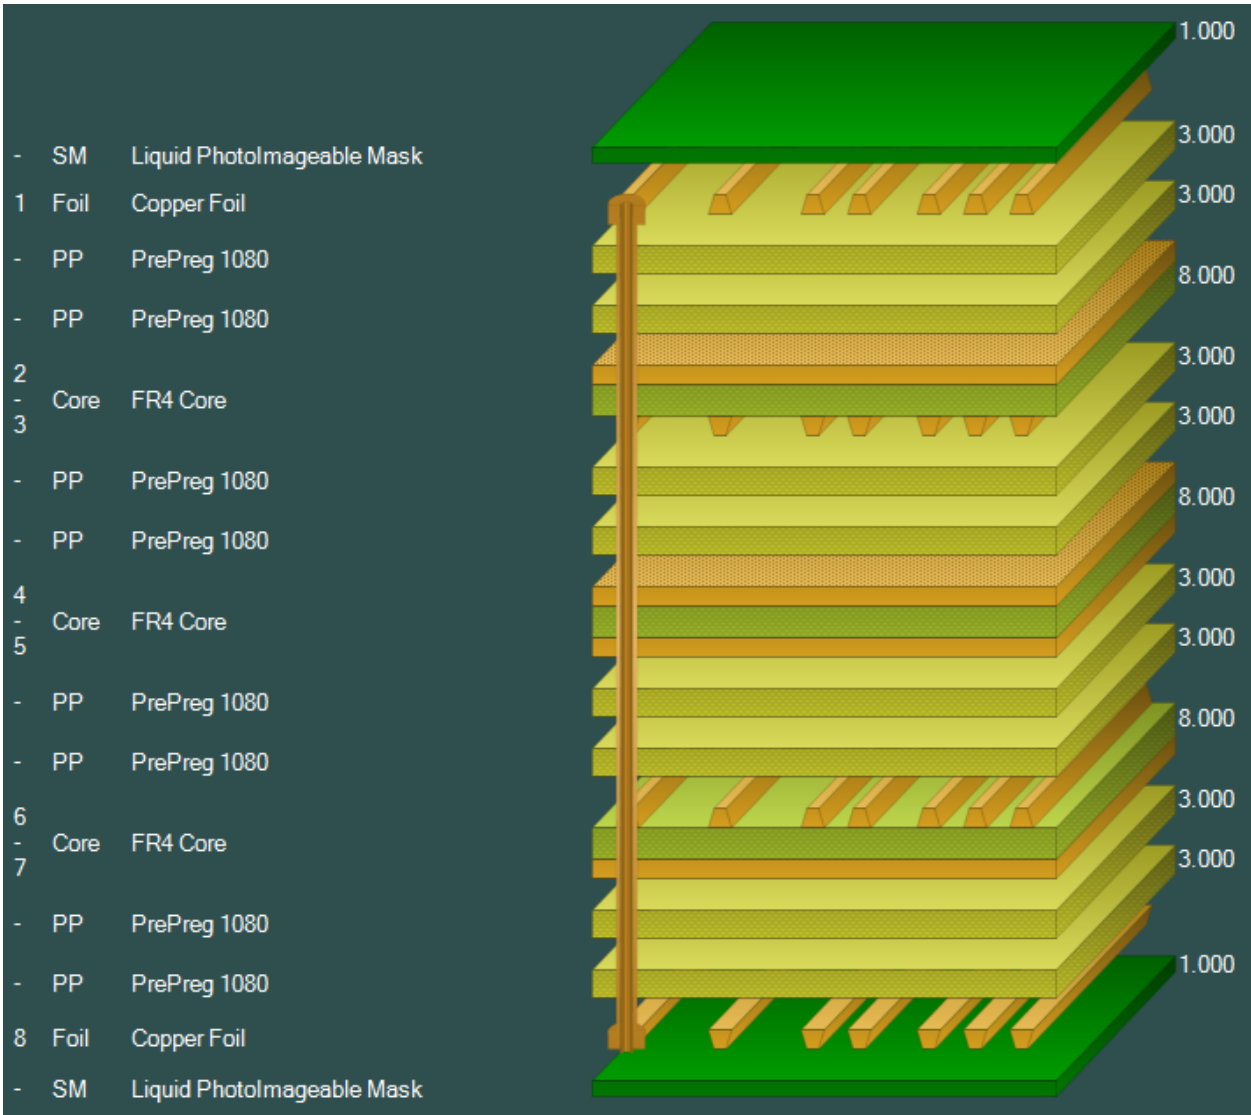

Summary information is shown in the Status Bar and includes the units in use, the target stackup thickness and the stackup thickness without and with soldermask.


Mils/Thous	Target Stack Up Thickness = 60.0000	Stack Up Thickness = 59.2000	Stack Up Thickness with Soldermask = 61.2000
------------	-------------------------------------	------------------------------	--



See 2D View

### Changing the Stackup view

For many editing operations changes to the stack may be easier to visualize when shown two-dimensionally. Click the See 2D View button

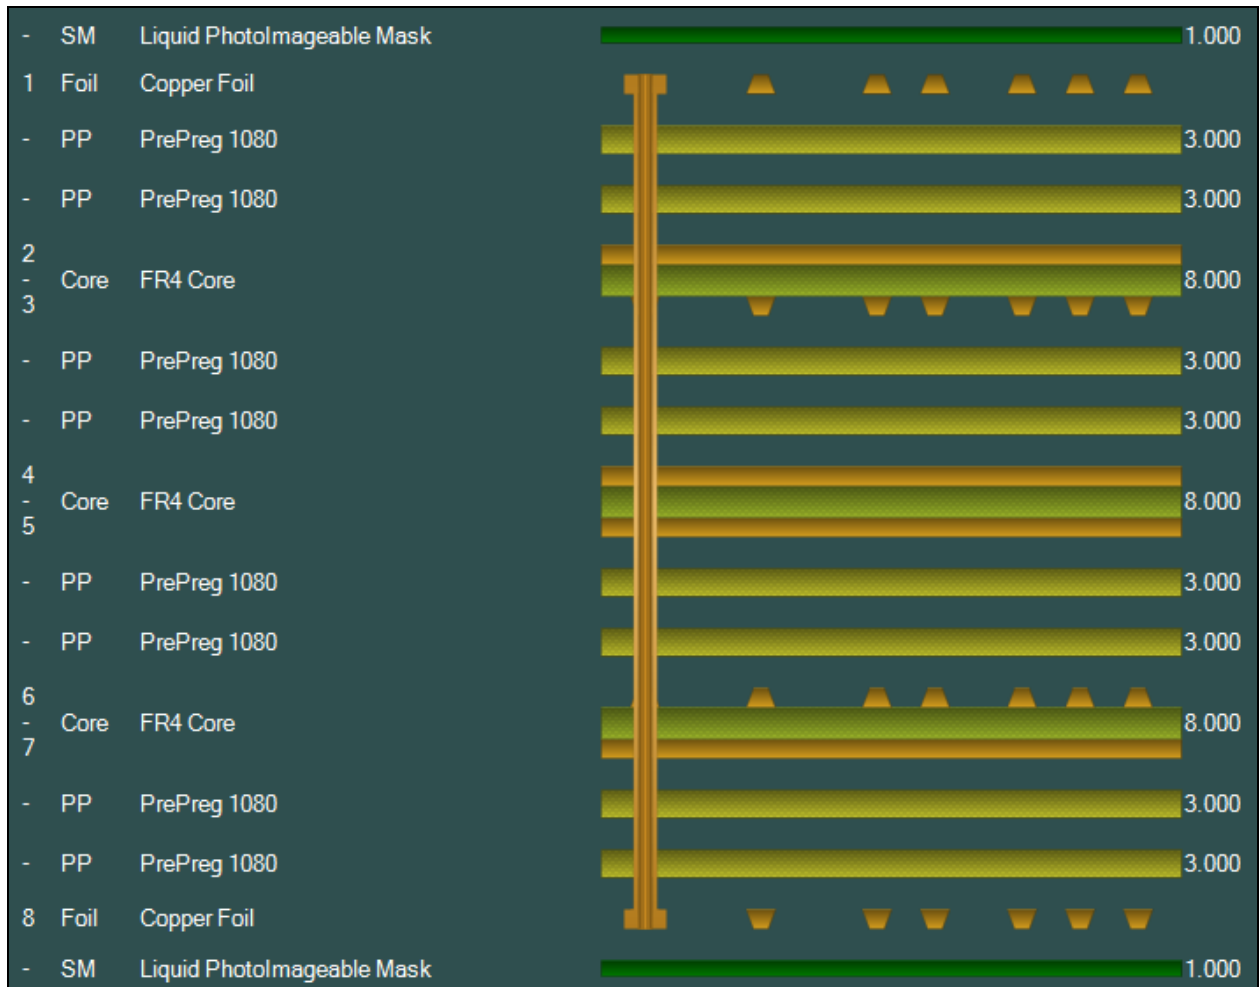

### Filtering Materials

When adding or swapping materials, available materials (foils, prepregs, etc.) are listed in the associated material library dialog.

Lists can be filtered for materials matching desired parameters (dielectric thickness, Er, etc.) See *Using Speedstack Materials Libraries*.

### Saving stackups


It is strongly recommended that users save work frequently and maintain safe backups of stackups and projects.

## Creating stackups manually

Speedstack allows the designer to add or edit stackup layers in any order, from top to bottom, bottom to top or from the centre layer outwards. This example will create a four-layer stackup, starting at the centre core layer and adding layers above and below.

### Editing the stack

When editing the stack it will probably be most convenient to right click an object in the stack and select the associated command from the context menu. The menu will reflect the commands available for the selected object — commands that are not appropriate for the object are greyed out.

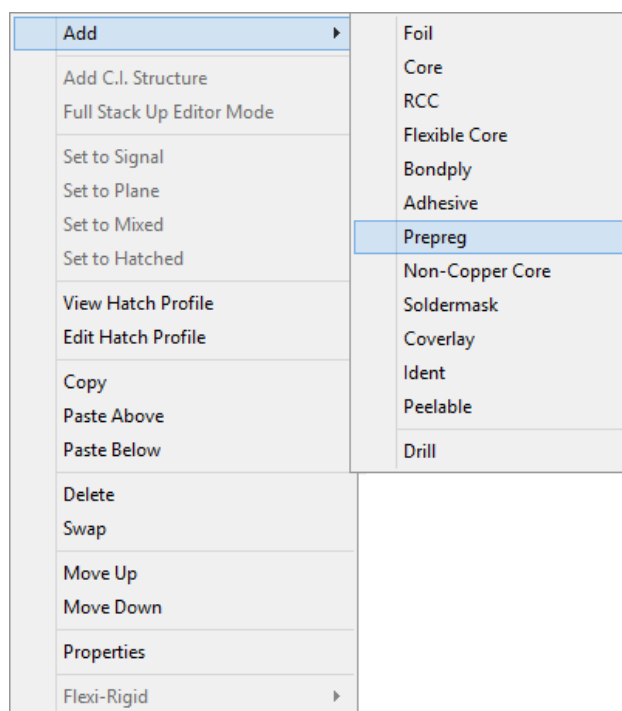

Alternatively, select the object (copper, prepreg, core, etc.) with the left mouse button and choose the command from the Speedstack toolbar.

### *Adding layers to the stackup*



*Go To Materials Library*

Items added to the stackup are added from the currently open materials library. Speedstack opens Program Files\Polar\Speedstack\default.mlbx if it exists; if a different library is required, open it via Go To Materials Library.

Note: Speedstack does not ship with the default.mlbx library.

For this discussion open one of the two sample library files, Speedstack Imperial.mlbx or Speedstack Metric.mlbx (stored in the Program Files\Polar\Speedstack\Samples folder at installation time for a default installation.)

### Caution: Consistency of units

When defining dimensions for a stackup (for example, layer thicknesses) ensure that all measurements are defined using the same units (mils, mm, etc.) throughout the structure and its libraries.

Note: the libraries supplied for these examples are preloaded with sample data only.

Click the File|New command to clear the stackup screen and notes and information text areas.

Click the File|Save Stackup or Save Project command to save the stackup or project. Users are recommended to save stackups or projects frequently during the stackup creation process to avoid data loss. Stackup files, project files and library files should be backed up to a secure location.

### Adding a core layer



Click the Add Layer Material button and choose Core...the Core library is displayed

The Core library contains full details of the core material, including base and finished thicknesses, dielectric constant, and upper and lower copper thicknesses.

Supplier Description	Description	Stock Number	Dielectric Base Thickness	Dielectric Finished Thickness	Dielectric Constant	Upper Cu Base Thickness	Lower Cu Base Thickness
CO/001	FR4 Core 2	400-001	2	2	4.2	0.7	0.7
CO/002	FR4 Core 2	400-002	2	2	4.2	1.4	1.4
CO/003	FR4 Core 2	400-003	2	2	4.2	2.8	2.8
CO/004	FR4 Core 3	400-004	3	3	4.2	0.7	0.7
CO/005	FR4 Core 3	400-005	3	3	4.2	1.4	1.4

Click on any of the column buttons to sort the library list by the selected column.



Add Material above

Choose a core type from the list of cores and click the Add Material Above button. The core is added to the stackup screen. When editing a stack this button adds a core above the selected layer.



Stackup core layer



Add Material below

Layers may also be added below the selected layer. The Add Material below button adds a core below the selected layer.

As each layer is added the stackup information table is updated to reflect the current status of the stackup.

Field	Value
Electrical Layer Count	8
Stack Up Cost	0.00
Copper Thickness	11.0236
Dielectric Thickness	51.9685
Solder Mask Thickness	1.9685
=====	=====
Target Stack Up Thickness	62.9921
Stack Up Thickness	62.9921
Stack Up Thickness with Soldermask	64.9606
=====	=====

Stackup information table

*Note: The Stackup Information is printed in red when the stack thickness is outside its tolerance.*

With the core selected, the Selected Item table displays the properties of the core.

Field	Value
Supplier Description	CO/016
Description	FR4 Core
Stock Number	400-016
Type	FR4
Upper Cu Base Thickness	0.7000
Upper Cu Finished Thickness	0.7000
Upper Copper Coverage	0
Minimum Trace Width	2.9528
Data Filenames	
Dielectric Base Thickness	8.0000
Dielectric Finished Thickness	8.0000
Dielectric Constant	4.2
Resin Content	45
Tg	180
Td	n

Core layer information

To observe the properties of any material, click the material in the stack and read off the properties in the Selected Item Information panel.

### *Editing the selected layer properties*

To change the properties of the selected object (for example, to modify the dielectric constant or the value for the finished thickness of the dielectric), right click the object in the stackup and choose Properties from the shortcut menu; in this example the Core Properties dialog is displayed.

Note that the Enable Finishing setting in the Tools|Set Stackup Thickness/Finishing Options dialog must be unchecked to enable the Finishing Thickness to be specified manually.

Change the value to the corrected value and click Apply.

### *Adding data file names*

If available, add the data file name(s) to the upper and lower copper layers and click Apply.

Close the dialog when all changes are completed.

Changes will be reflected in the Stackup Information table.

### *Changing a layer function*

In this example both the signal layers above and below the core dielectric are changed to planes.

Click the lower signal layer and click the Set Layer Plane button. Repeat for the upper signal layer.



*Set Layer to Plane*

The changes are reflected in the stackup window

1	Core	FR4 Core		8.000
2				

### Exchanging layers

To change just the core dielectric (leaving the copper layers unaffected), right click the core material (for example the FR4 in the graphic above) and choose Swap from the context menu or left click the core material and click the Swap Selected Material button. Choose the new core type from the library and click the Swap button. The layer properties will change to reflect the new material and changes appear in the Stackup Information table.



Swap Selected Material

### Adding prepreg layers

With the core selected, click the Add Material button and choose Prepreg...; the Add Prepreg library is displayed.



Add Material

Supplier Description	Description	Stock Number	Dielectric Base Thickness	Dielectric Finished Thickness	Dielectric Constant	Resin Content	Tg
PP/001	PrePreg 1080	300-001	3	3	4.2	60	180
PP/002	PrePreg 3080	300-002	3	3	4.2	60	180
PP/003	PrePreg 3113	300-003	4	4	4.2	53	180
PP/004	PrePreg 1651	300-004	6	6	4.2	47	180
PP/005	PrePreg 7628	300-005	7.9	7.9	4.2	45	180
PP/006	PrePreg 106	300-006	2	2	4.2	60	180

The Prepreg library contains details of the prepreg material, including the prepreg's base and finished thickness and dielectric constant.



Add Material Above

Choose the Prepreg material from the database and click the Add Material Above button.

-	PP	PrePreg 1080		3.000
1	-	Core		8.000
2	-	FR4 Core		

The prepreg layer is added above the core.

To change the properties of the prepreg material right-click the layer and choose Properties from the short cut menu. For example, the value for Finished Thickness can be modified to reflect the effects of the pressing process.

Dielectric			
Base Thickness	<input type="text" value="6.0000"/>	Finished Thickness	<input type="text" value="6.0000"/>
Dielectric Constant	<input type="text" value="4.2000"/>	Resin Content %	<input type="text" value="47.00"/>
Tg	<input type="text" value="180.0000"/>		



Add Prepreg Below

Select the Core material and click Add Material|Prepreg to display the prepreg library and click the Add Below button. The layer of prepreg is added below the core.



-	PP	PrePreg 1080	3.000		3.000
1			2.800		
-	Core	FR4 Core	8.000		8.000
2			2.800		
-	PP	PrePreg 1080	3.000		3.000

Modify the properties as necessary.

### Choosing the Display Data fields

The Speedstack Stack Editor provides a range of useful data fields for optional display alongside each material. Base and Finish (Display Field 4) refer to thicknesses and weights and appear to the left of the stackup graphic.

Display Field 5 appears to the right of the stackup graphic. Choose the data of interest from the drop down lists.














*Note: Processed Thickness is the Finished Thickness for copper layers and Isolation Thickness for dielectric layers.*

### Adding a foil layer









Select the upper layer of prepreg and click the Add Layer Material button and choose Foil to display the copper foil library.

Supplier Description	Description	Stock Number	Cu Base Thickness	Type	Cost	Lead Time
FO/001	Copper Foil	100-001	0.7	Copper	1	0
FO/002	Copper Foil	100-002	1.4	Copper	2	0
FO/003	Copper Foil	100-003	2.8	Copper	3	0

Choose the foil type and click Add Above, the copper foil layer is added above the selected prepreg layer.

1	Foil	Copper Foil	1.400							
-	PP	PrePreg 1080	3.000							
2	Core	FR4 Core	2.800							
-			8.000							
3	Core	FR4 Core	2.800							
-			8.000							
-	PP	PrePreg 1080	3.000							

Repeat the procedure for the lower prepreg layer: select the lower prepreg layer and add a layer of copper foil below the layer (shown below as layer 4 in the 3D view).

1	Foil	Copper Foil	1.400							
-	PP	PrePreg 1080	3.000							
2	Core	FR4 Core	2.800							
-			8.000							
3	Core	FR4 Core	2.800							
-			8.000							
-	PP	PrePreg 1080	3.000							
4	Foil	Copper Foil	1.400							

To alter the foil properties, right-click the foil layer and choose Properties. Using the Properties dialog the user can, for example, specify that the trace is shown inverted.

Copper

Base Thickness

1.4000


Finished Thickness

1.4000

Copper Coverage %

0.00

Graphical Colour



Data Filename

Trace Inverted

☒

Remove Copper

☐

Finishing Applied

☐


Note that the stackup is being built symmetrically about the centre layer.

### Adding solder mask layers

With the upper layer of foil selected, click the Add Layer Material button and choose Soldermask to add a layer of LPI solder mask above the foil.

Supplier Description	Description	Stock Number	Mask Thickness	Dielectric Constant	Colour	Type	Cost
SM/001	Liquid PhotoImageable Mask	500-001	1	4	Green	SolderMask	0.5
SM/002	Liquid PhotoImageable Mask	500-002	1	4	Green	SolderMask	0.6
SM/003	Liquid PhotoImageable Mask	500-003	1	4	Blue	SolderMask	0.6
SM/004	Liquid PhotoImageable Mask	500-004	1	4	Red	SolderMask	1

Repeat the process for the solder mask material below the lower foil layer.

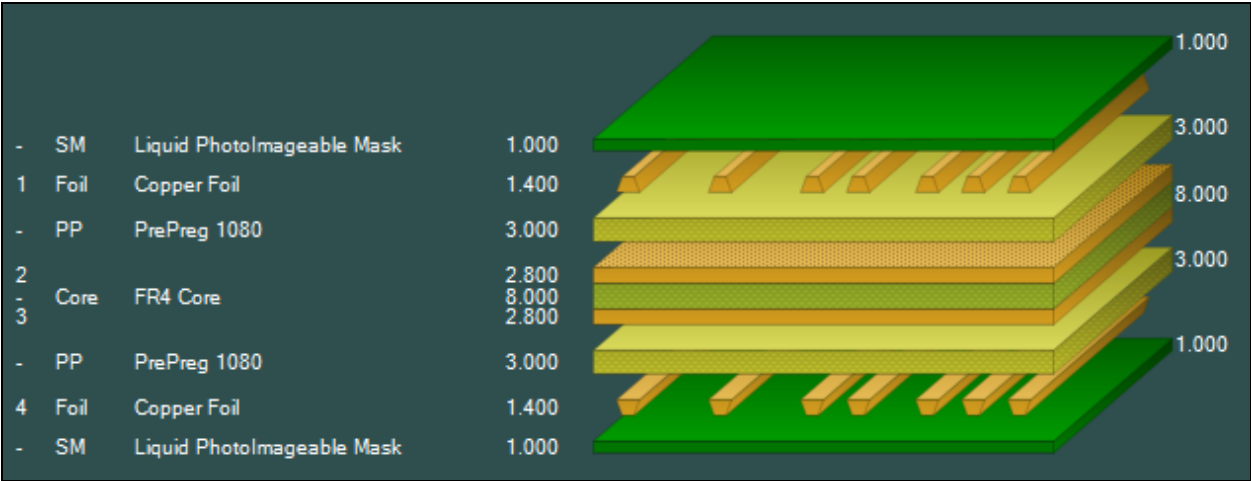


*Adding the Ident layers*

Select the lower LPI Soldermask layer and click the Add Layer Material button and choose Ident to add a layer of Screened Ident below the layer. The sample Ident library includes ink thickness and colour

Supplier Description	Description	Stock Number	Ink Thickness	Colour	Type	Cost
ID/001	Screened Ident	600-001	2	White	Ident	0.1
ID/002	Screened Ident	600-002	2	Yellow	Ident	0.1
ID/003	Screened Ident	600-003	2	Black	Ident	0.1

Repeat for the upper layer.

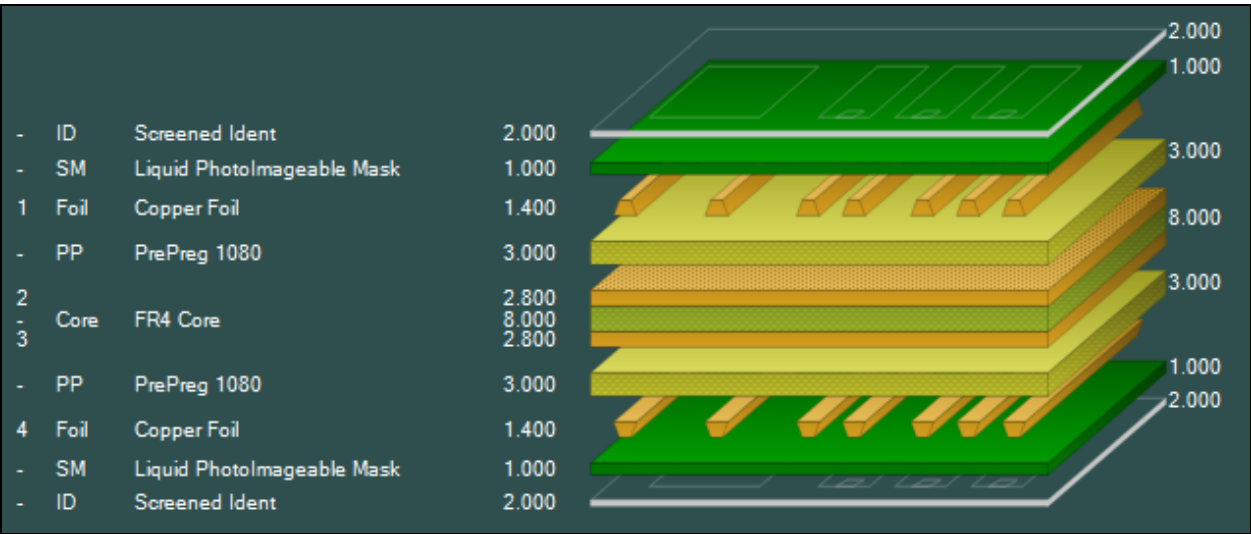



AddDrill

### Adding a drill

To add a drill between layers click the Add Drill button; the Add Drill dialog is displayed.

Select the column in which to place the drill.

Choose the first and second electrical layer numbers (layers 1 and 4 in the example).

Specify the drill type, mechanical or laser and whether through plated. Note that with laser drills the order of drill layers is important, e.g. layer 1 and 4 is different from layer 4 and 1. Optionally, add the NC drill data filenames.


Optionally, add the hole count, number of different hole sizes and the minimum hole size. Click Add and close the dialog. The drill information is added to the stackup. The example below contains through plated and laser drill information.

### Deleting drills

To delete a drill right click the drill and from the context menu choose Delete. To delete all drills choose Delete all Drills – confirm via the dialog below.


All drills will be cleared from the stack.

The finished stackup is shown below

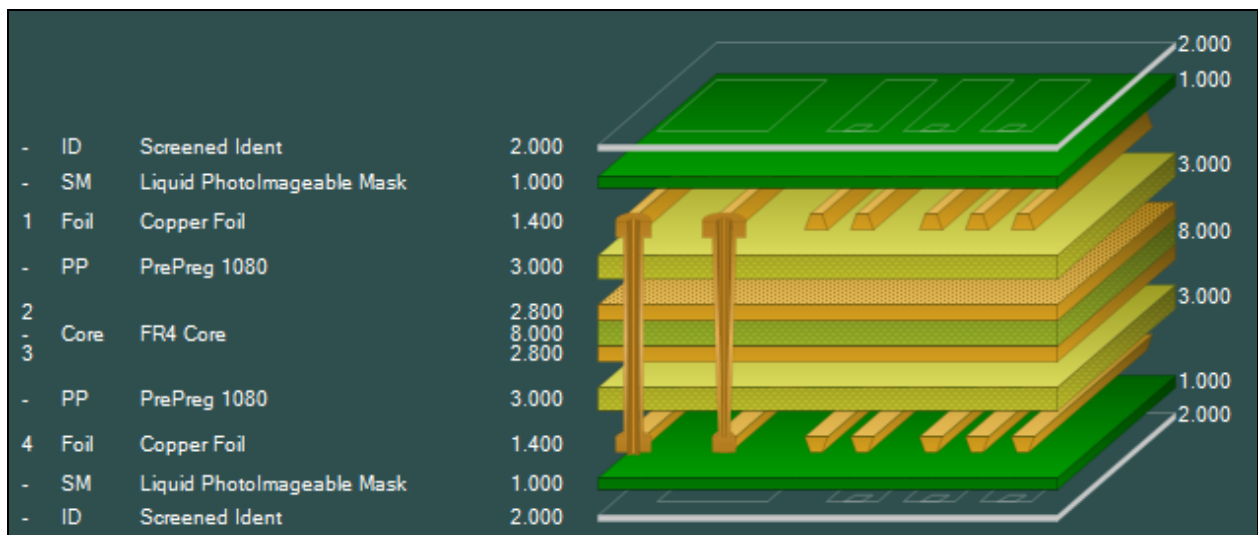


### Adding stack vias

Speedstack can add stack vias to the stackup in a single operation. To add stack vias between layers 1 and 5 in the stackup below, select layer 1 and click Add Drill.

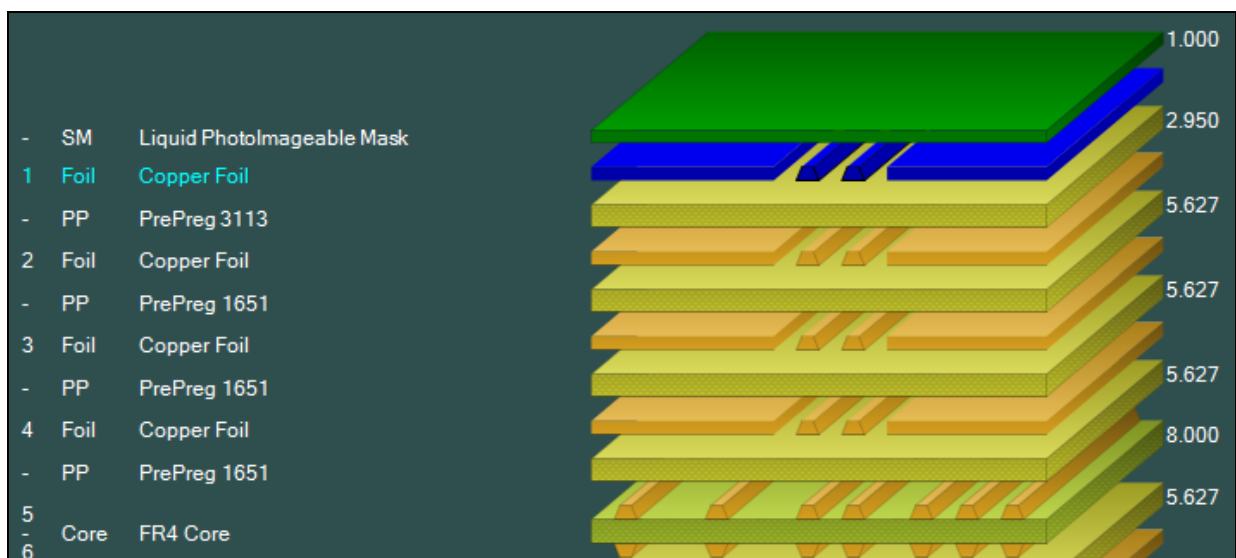

Specify the column number and electrical layers 1 and 5 and choose Laser (Stacked) – from the Fill Type drop down list choose Copper. Click Add.

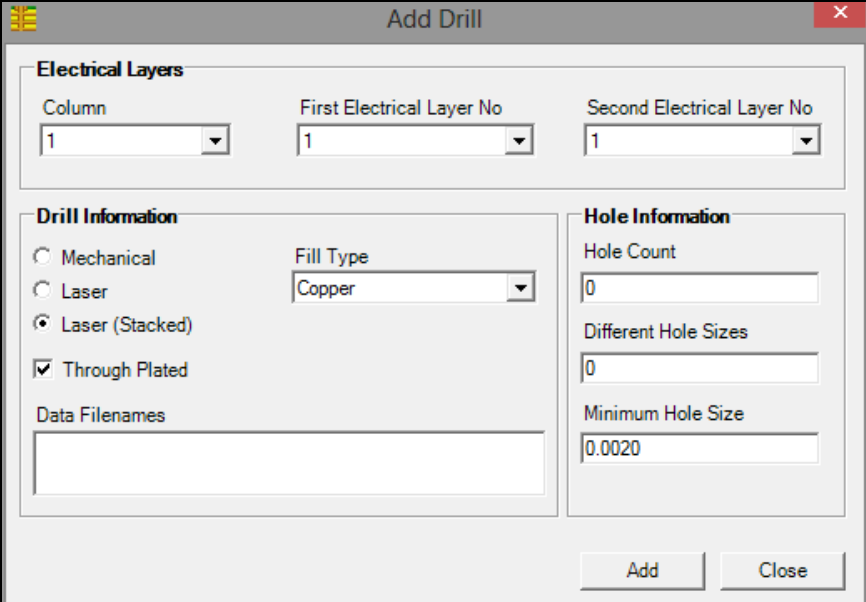


The 'Add Drill' dialog box is shown with the following settings:

- Electrical Layers:**
  - Column: 1
  - First Electrical Layer No: 1
  - Second Electrical Layer No: 1
- Drill Information:**
  - ☐ Mechanical
  - ☐ Laser
  - ☒ Laser (Stacked)
  - ☒ Through Plated
  - Fill Type: Copper
  - Data Filenames: (empty)
- Hole Information:**
  - Hole Count: 0
  - Different Hole Sizes: 0
  - Minimum Hole Size: 0.0020

Buttons: Add, Close

The stack vias are added to the stack (below.)

*Note: The drill properties (i.e. Drill Information and Hole Information) are retained between each Add Drill operation. This can speed up the process of adding drills, especially when multiple drills of the same type are being added to the stack up.*

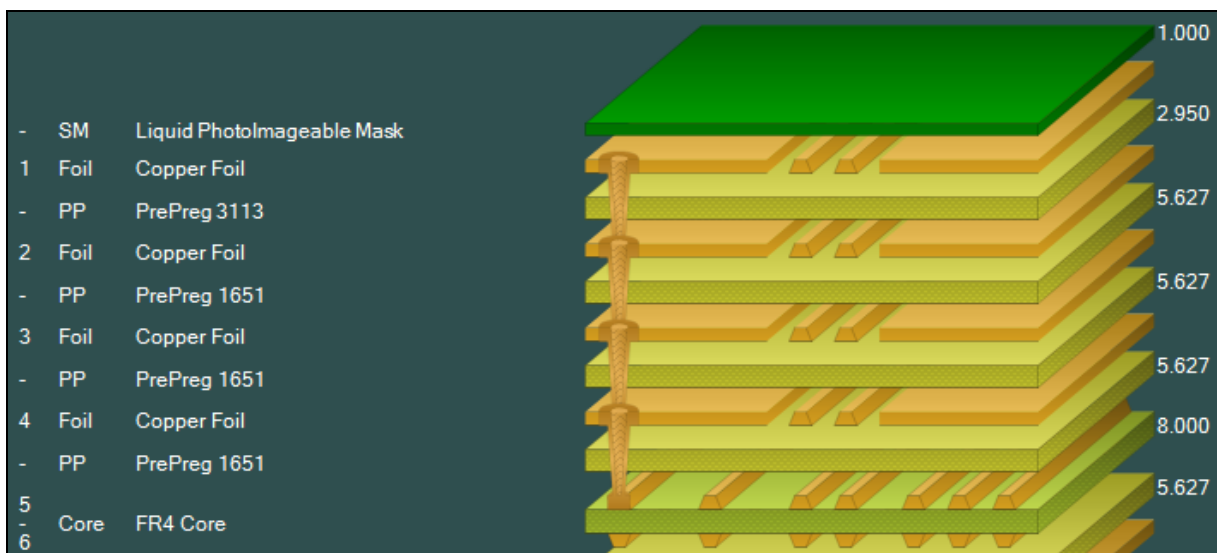

Delete Selected Material

### Deleting a layer

To remove a layer from the stackup select the layer and click the Delete button.



Copy Selected Material

### Copying a layer

With layers defined it will often be found more convenient to copy an existing layer and paste it into the stackup than to create a new layer “from scratch”. Select the layer to be copied and click the Copy Selected Material button. Click the

layer nearest the destination location and choose Paste Above or Paste Below as appropriate

Note: when modifying the stackup it may be necessary to redefine the drill information to reflect the changes.


### *Copying material properties*

Speedstack can copy material properties from one material in the stackup and paste them onto multiple materials simultaneously.




*Copy Material Properties*

For example, to replace the three prepreg materials below Layer 3 in the stackup below with the Layer 1 material, PrePreg 1080, select the source material (shown highlighted below) and click Copy Material Properties

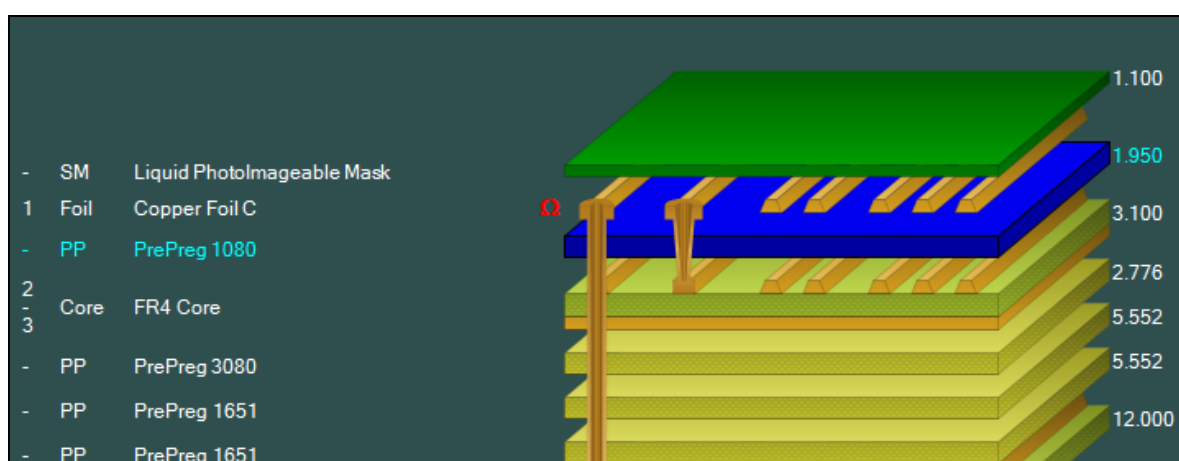

Select the three target layers

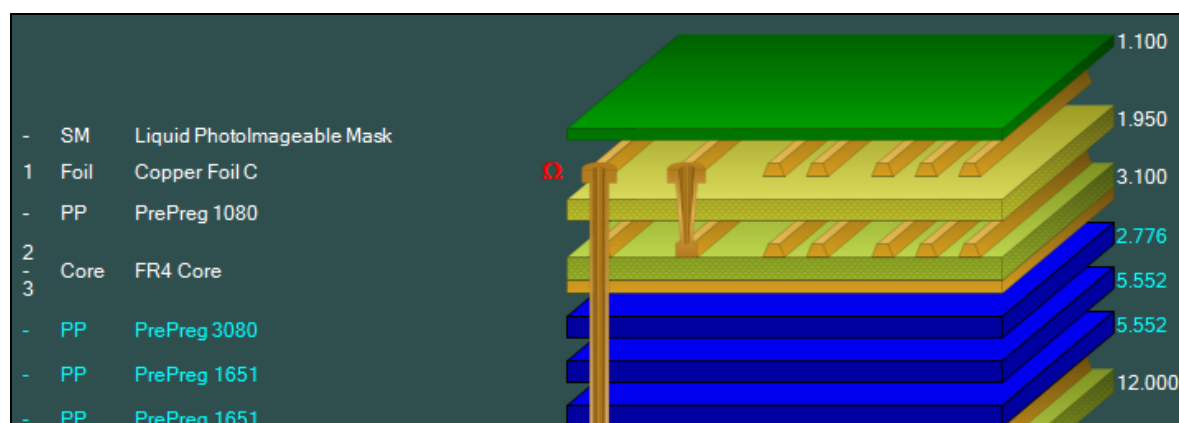

*Paste Material Properties*

Click Paste Material Properties – the Paste Material Properties dialog is displayed.

Paste Material Properties

Please select the Property Groups that you wish to paste to the selected materials:

**General Properties (All Materials)**

- ☒ General Information (Supplier, Description, Stock Number etc)
- ☒ Notes (5 x Note properties)
- ☒ Colour (Draw colour)

**Conductor Properties (Foil, Core, RCC, Flex Core)**

- ☒ Copper (Base and Finished Thickness, Copper Coverage etc See Note 1)

Note 1: Layer Numbers and Layer Types assigned to Copper layers are not copied.

**Dielectric Properties (Core, RCC, Prepreg, Flex Core, Bondply, Adhesive)**

- ☒ Dielectric (Base and Finished Thickness, Isolation Distance, Dielectric Constant etc)

**Solder Mask Properties (Solder Mask)**

- ☒ Solder Mask (Thickness, Dielectric Constant etc)

**Coverlay Properties (Coverlay)**

- ☒ Coverlay (Base and Finished Thickness, Dielectric Constant etc)

**Ident Properties (Ident)**

- ☒ Ident (Thickness etc)


**Peelable Properties (Peelable)**

- ☒ Peelable (Thickness etc)

☒ Select / Deselect All

Apply Cancel

Select the property groups that are to be applied to the target materials and click Apply. Properties that do not apply for a material type are ignored.

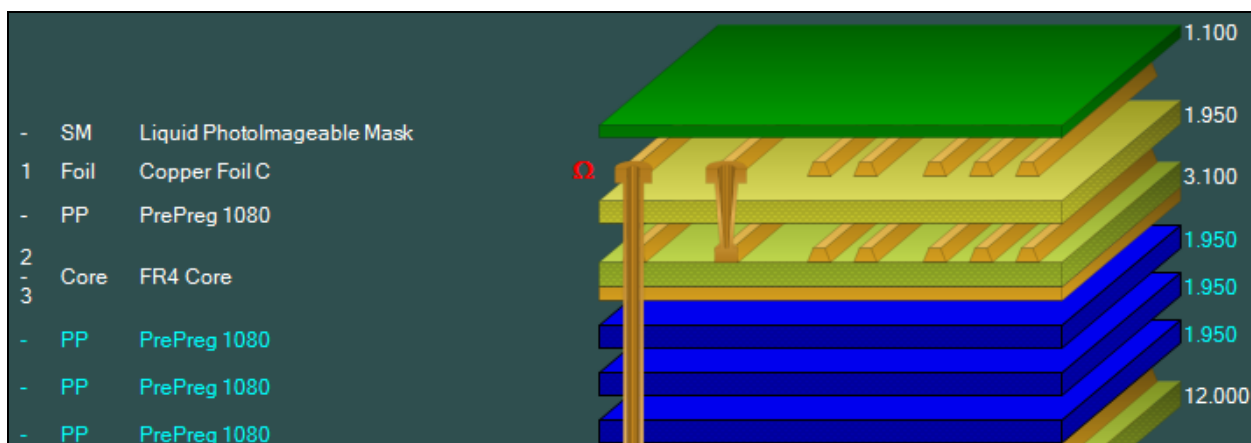

In this example all material properties have been applied to the three target materials.

*Note: When changing multiple materials simultaneously it is important to review the resulting stack up. It will probably be necessary to recalculate any associated controlled impedance structures, especially if dielectric height and copper thickness parameters have changed.*





Move Selected Material Up



Move Selected Material Down

### Moving materials

To move materials within the stackup use the Move Selected Material Up and Move Selected Material Down buttons.

When a material is moved it is exchanged with the layer above or below, respectively.



Apply Finishing



Reset Finishing

### Applying finishing

To apply the finished thickness factor throughout the board, click the Apply Finishing button with no material selected.

To reset the finished thickness back to the original base thickness of the materials throughout the board, click the Reset Finishing button with no material selected.


Note: when applying or resetting finishing, if a material is selected it will be necessary to specify whether finishing is to be applied to the selected material only or the whole stack.



See 2D View

### Displaying the stackup in 2-dimensional view

To change the view of the stackup from its default 3-dimensional aspect, click the See 2D View button. The stackup is displayed in 2-dimensional view.

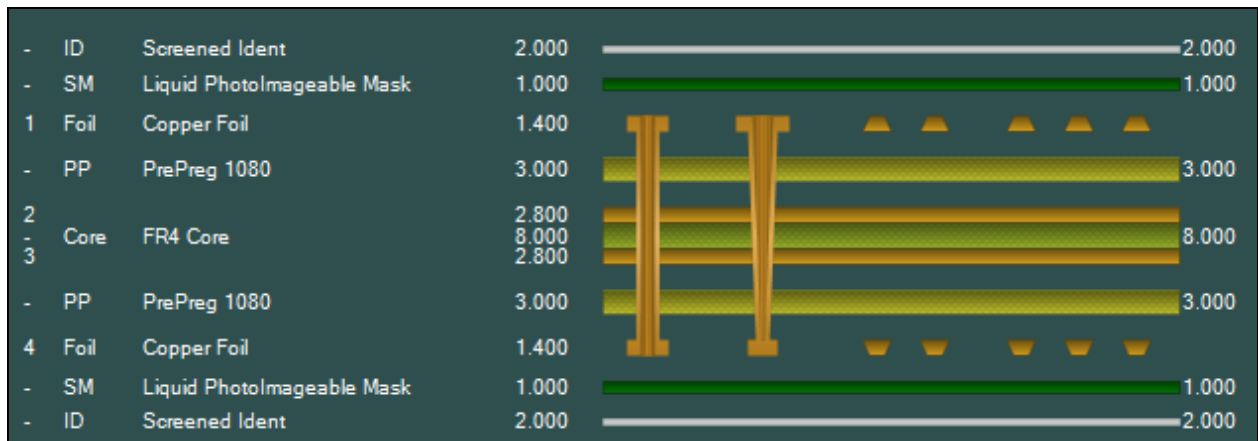

See 3D View


Click the View 3D button to restore the 3 dimensional view.

### Mirror Build

Mirror Build allows the designer to consider the stack in two halves, designing and building, for example, just the top half and mirroring the structure into the lower half.

Build the top half of the stack, including any controlled impedance structures and click the Mirror Build button; specify whether the current set of layers is the upper or lower

half of the stack. To maintain symmetry, Speedstack will add a layer of material as appropriate to the stack;

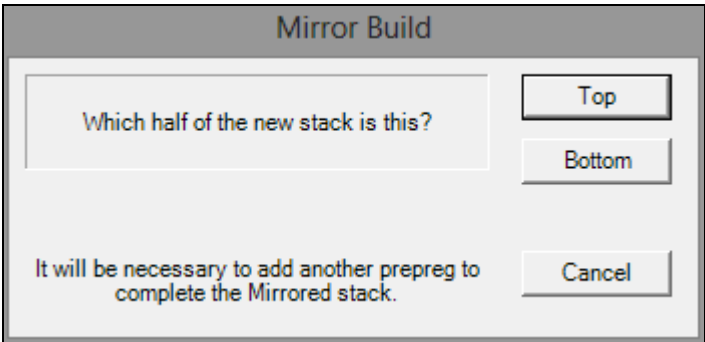

the stack is reflected symmetrically into the lower half.


**Symmetrical Builds**

In Symmetrical Build mode the Speedstack maintains stack symmetry as the stack designer creates or edits a stack. Changes in one half of the stack are reflected in the opposite half of the stack to ensure a symmetrical stack.

This example considers an 8-layer stack – beginning with three cores and then using Symmetrical Build.

**Creating a new stack**

Create a new empty stackup and add three cores.

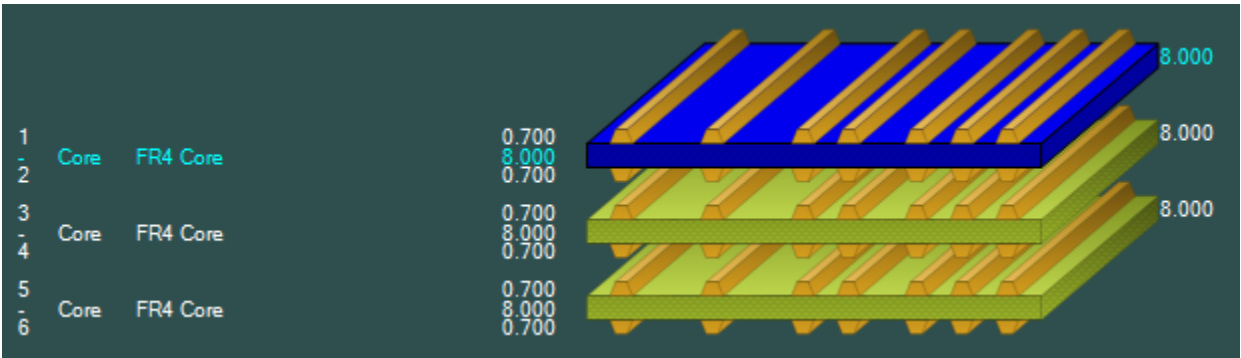


When constructing complex structures it will often be found easier to use the two dimensional aspect.



*View 2D button*

To change the view of the stackup from its default 3-dimensional aspect, click the See 2D View button. The stackup is displayed in 2-dimensional aspect.

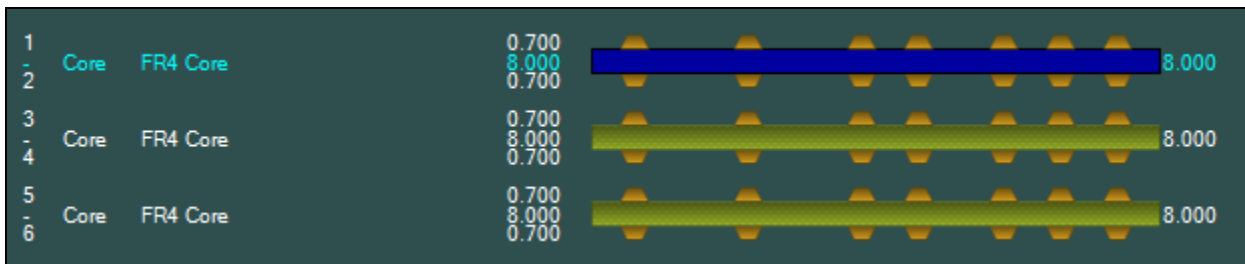

### Adding a prepreg layer in Symmetrical Mode

In this example it is necessary to add prepreg layers between cores to achieve the required dimensions.




Symmetrical OFF



Symmetrical ON


Switch to Symmetrical Mode and work in the top half of the stack – in Symmetrical Mode as layers are added to the top half of the stackup the Speedstack will add layers to the lower half of the stackup to maintain stack symmetry.

To add a layer of prepreg between Layers 2 and 3 select Layer 3 (the selected layer is shown highlighted in the figure below.)

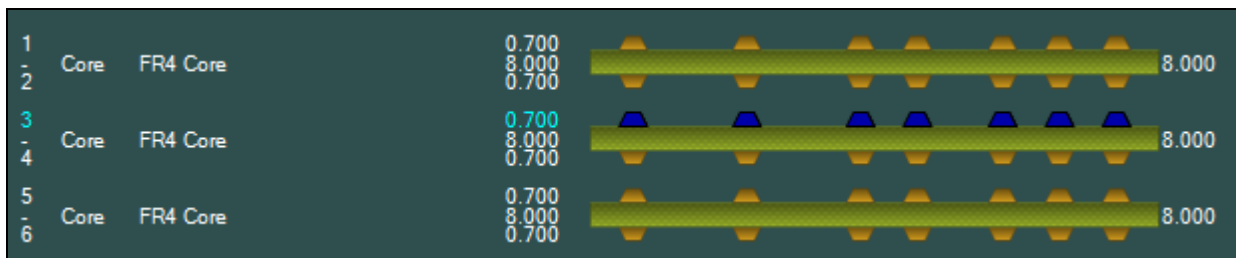


Click the Add Material button and add a layer of prepreg above Layer 3 (shown highlighted in the figure below).

In Speedstack's symmetrical mode the prepreg layer is automatically reflected in the lower half of the structure.

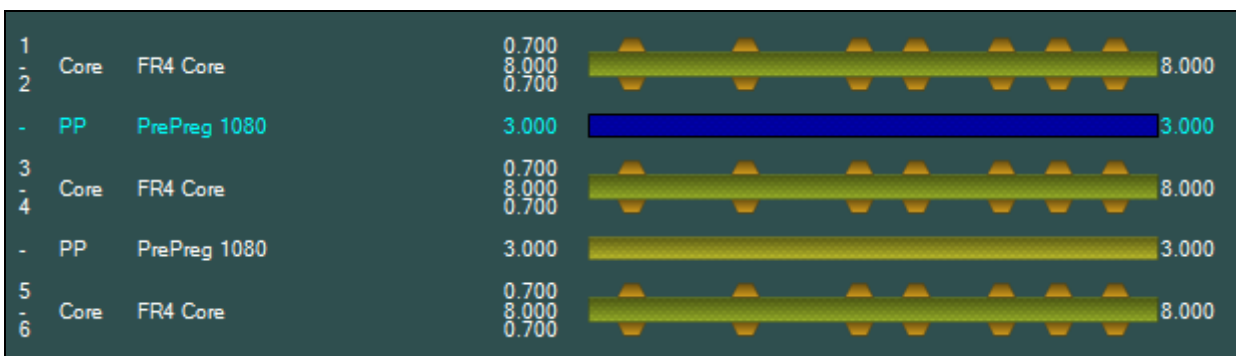


### *Adding a second prepreg layer*

Now add a second layer of PrePreg 1080 above the layer just added; the new prepreg layer is reflected in the lower half of the stack as shown below.

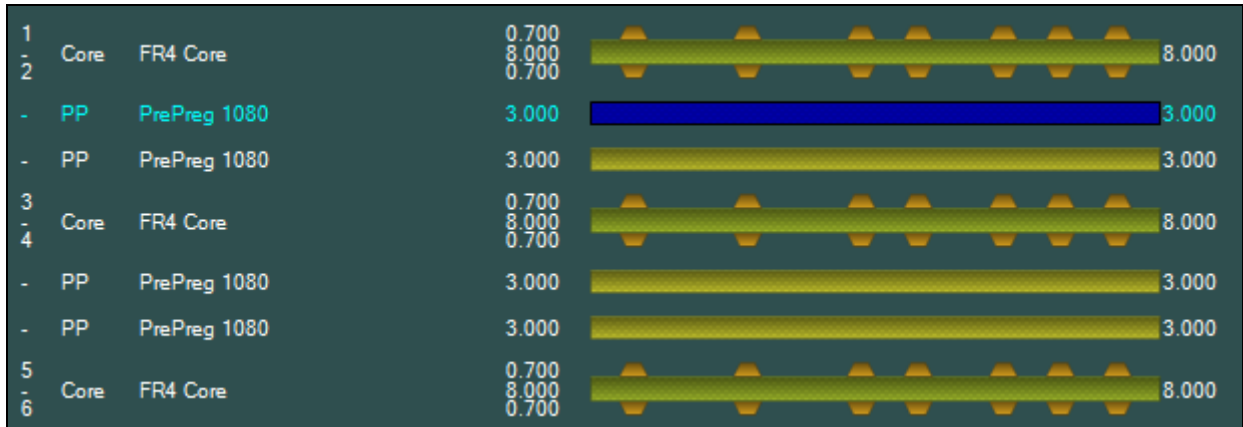

Next, add a layer of prepreg above layer L1 in the upper half of the stackup.

Speedstack in symmetrical mode automatically maintains stack balance by adding the corresponding layer below L6.

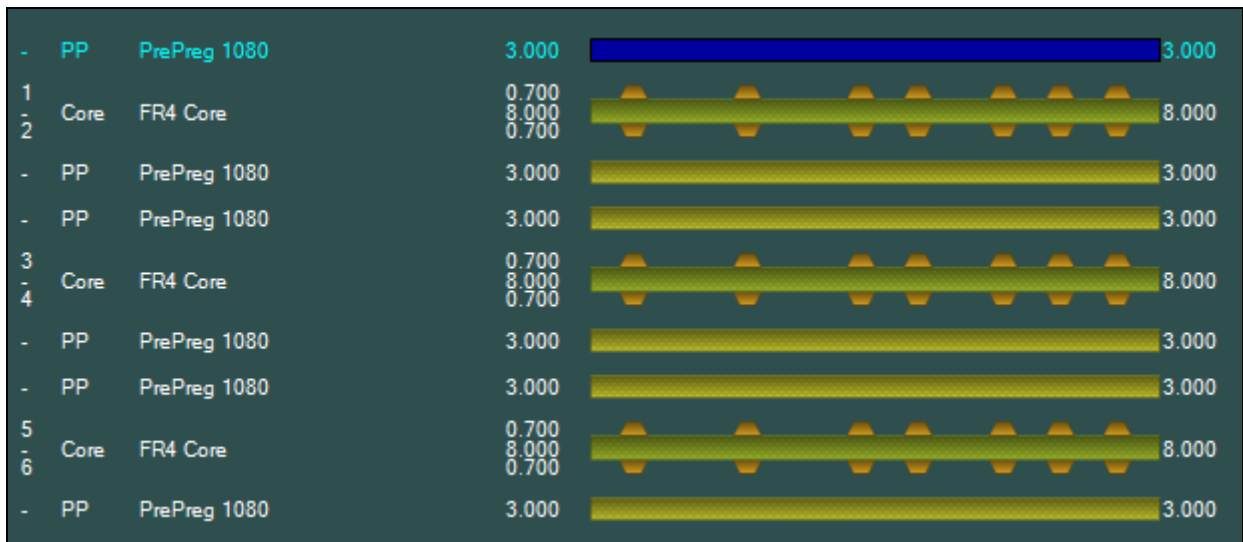

### *Adding foil, LPI Mask and Ident layers*

Next, add a foil layer (L1 below) which is mirrored as L8; as part of the process Speedstack inverts layer L8.

1	Foil	Copper Foil	1.400							
-	PP	PrePreg 1080	3.000							3.000
2			0.700							
3	Core	FR4 Core	8.000							8.000
			0.700							
6			0.700							
7	Core	FR4 Core	8.000							8.000
			0.700							
-	PP	PrePreg 1080	3.000							3.000
8	Foil	Copper Foil	1.400							

Next, LPI solder mask is applied to the top side of the stackup and reflected on the bottom side.

-	SM	Liquid PhotoImageable Mask	1.000							1.000
1	Foil	Copper Foil	1.400							
-	PP	PrePreg 1080	3.000							3.000
-	PP	PrePreg 1080	3.000							3.000
8	Foil	Copper Foil	1.400							
-	SM	Liquid PhotoImageable Mask	1.000							1.000

Ident layers (which are not considered components of electrical symmetry) will not be automatically reflected by Speedstack as they are added and must be applied separately to each side of the board.

Select the upper solder mask and add an Ident material above; select the lower solder mask and add an Ident material below.

-	ID	Screened Ident	2.000							2.000
-	SM	Liquid PhotoImageable Mask	1.000							1.000
1	Foil	Copper Foil	1.400							
8	Foil	Copper Foil	1.400							
-	SM	Liquid PhotoImageable Mask	1.000							1.000
-	ID	Screened Ident	2.000							2.000



Set Layer To Plane

### Assigning ground planes

With all the material in place, assign ground planes; begin with layer L2 – it's reflected in layer L7. Right click the copper (L2) in the top core and choose Set Layer To Plane.

2			0.700		
- 3	Core	FR4 Core	8.000		8.000
			0.700		
-	PP	PrePreg 1080	3.000		3.000
-	PP	PrePreg 1080	3.000		3.000
4			0.700		
- 5	Core	FR4 Core	8.000		8.000
			0.700		
-	PP	PrePreg 1080	3.000		3.000
-	PP	PrePreg 1080	3.000		3.000
6			0.700		
- 7	Core	FR4 Core	8.000		8.000
			0.700		

Repeat the process for the other ground plane layers; layer L4 is designated a ground plane, the change is reflected in L5 in the lower half of the stack.

-	PP	PrePreg 1080	3.000		3.000
4			0.700		
- 5	Core	FR4 Core	8.000		8.000
			0.700		
-	PP	PrePreg 1080	3.000		3.000

The completed stack is shown below

-	ID	Screened Ident	2.000		2.000
-	SM	Liquid PhotolImageable Mask	1.000		1.000
1	Foil	Copper Foil	1.400		
-	PP	PrePreg 1080	3.000		3.000
2			0.700		
- 3	Core	FR4 Core	8.000		8.000
			0.700		
-	PP	PrePreg 1080	3.000		3.000
-	PP	PrePreg 1080	3.000		3.000
4			0.700		
- 5	Core	FR4 Core	8.000		8.000
			0.700		
-	PP	PrePreg 1080	3.000		3.000
-	PP	PrePreg 1080	3.000		3.000
6			0.700		
- 7	Core	FR4 Core	8.000		8.000
			0.700		
-	PP	PrePreg 1080	3.000		3.000
8	Foil	Copper Foil	1.400		
-	SM	Liquid PhotolImageable Mask	1.000		1.000
-	ID	Screened Ident	2.000		2.000


## Design rule checking

Speedstack includes facilities to check for errors in stackup design, such as layers placed in invalid order or asymmetrical structures. The condition of the design rule checkboxes is carried over from session to session.

The Design Rule Checker (DRC) displays results in the DRC dialog. As each design rule is broken the Speedstack increments the error count on the DRC tab.

### Viewing design rule errors

Click the DRC tab to view errors.

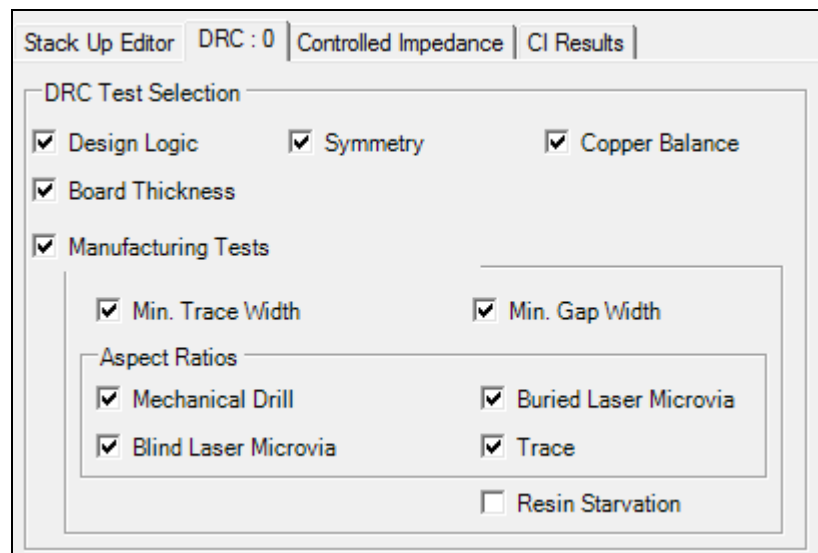

The Design Rule Checker checks include checking for:

- Two adjacent copper layers
- Resin coated copper on internal layer
- External prepreg layers
- Internal solder mask material
- Internal ident material
- Internal peelable mask
- Symmetry – different material types
- Copper not balanced
- Board thickness (if the board is outside tolerance the Stack Information in the Stack editor is displayed in red)

#### Manufacturing tests


- Minimum trace width (the test is carried out when calculating controlled impedance)
- Minimum trace separation (the test is carried out when calculating controlled impedance)

Drill aspect ratios for plated holes

Track aspect ratio

Excess resin test


If the Excess Resin check box is ticked values are shown as below; scroll through the layers as required

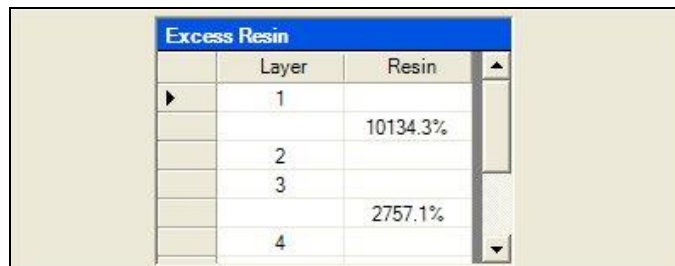

Layer	Resin
1	10134.3%
2	
3	2757.1%
4	


Users can choose to display all errors or to select from a combination of Design Errors, Symmetry errors and Copper balance errors, etc.; check the boxes as required.

Click on the errors shown in the list to highlight the errors in the stackup screen.

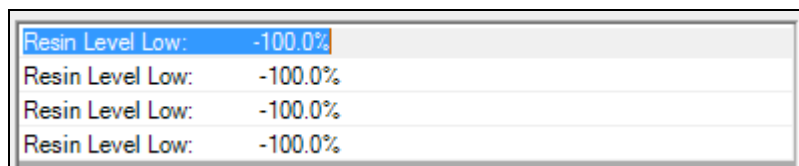

Resin Level Low:	-100.0%
Resin Level Low:	-100.0%
Resin Level Low:	-100.0%
Resin Level Low:	-100.0%

Errors are highlighted in red.

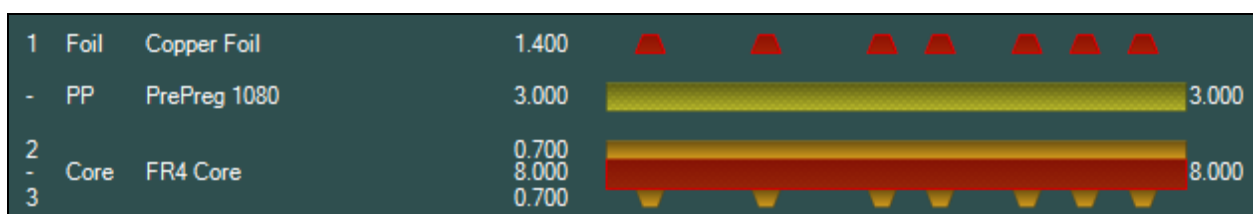

Layer	Material	Thickness	Error
1	Foil Copper Foil	1.400	Yes
-	PP PrePreg 1080	3.000	No
2	Core FR4 Core	0.700	Yes
-		8.000	No
3		0.700	Yes

### Correcting design rule errors

Users are strongly recommended to work through and correct errors in the order in which the errors are listed. Note that clearing each error may clear other errors in the process.


Manufacturing tests should be fixed before sending the PCB for manufacture. Hole sizes should be adjusted to comply. Failures with track and gap should be corrected, possibly by changing prepreg thickness and/or dielectric constants.

A collection of manufacturing constraints can be defined and the required one selected.



## Creating and using manufacturing constraints


From the Tools menu, select Manufacturing Constraints: the Manufacturing Constraints window opens, displaying any manufacturing constraints added.

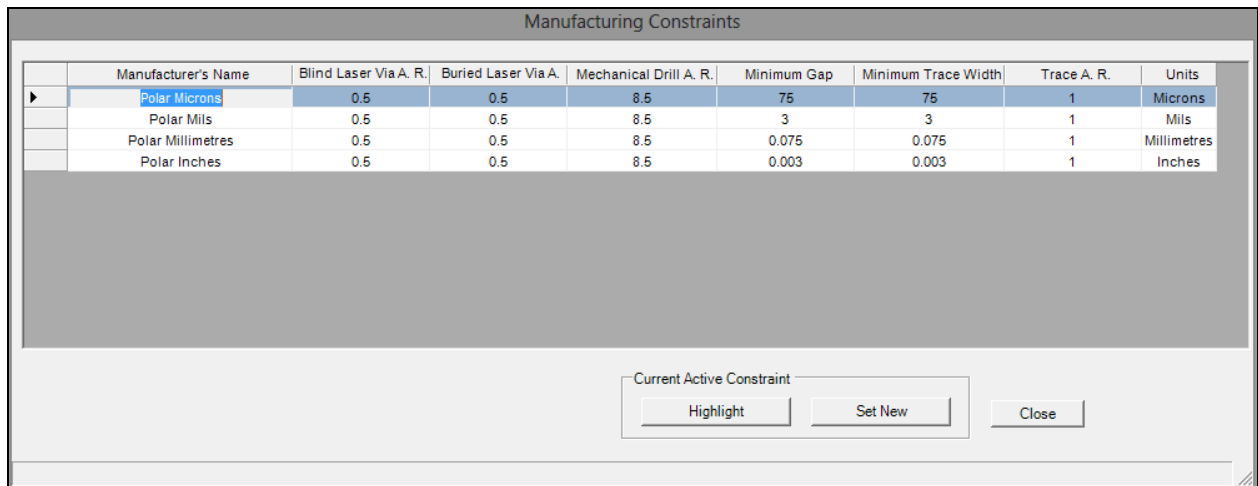

By default there will always be at least one. It is important to always have one constraint set active.

## Editing constraints

Double-click on a constraint row will bring up the Edit Constraints dialog; use the dialog to add, delete or edit constraints (gaps, trace widths, aspect ratios, etc.)

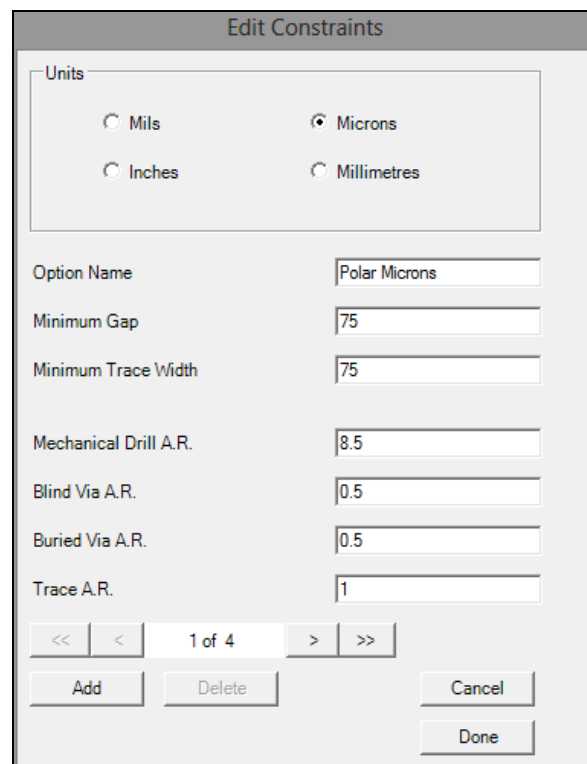

To edit a constraint set, use the navigation buttons to select the set to be modified, change the values as required and then press Done.

To delete a constraint set, use the navigation buttons to select the set, then press Delete.

To add a new constraint set, press the Add button, this will add a new (empty) constraint row, enter the name and constraint values and press Done.

**Adding controlled impedance structures**


*Note: before controlled impedance structures are added the stack must be fully defined (at least in terms of coppers). Attempting to add or delete coppers, or changing layer types will result in all controlled impedance structures being removed.*

Speedstack incorporates the facility to add controlled impedance structures to a layer in the stackup. Speedstack is integrated with the Polar Instruments Si8000m/9000e controlled impedance field solvers so impedance values for a structure may be calculated at the click of a button.

Structure parameters may be copied to the field solver for processing (for example by the Si8000m/9000e Goal Seeking function) and calculated values pasted back into Speedstack for insertion into the stackup.

*Adding a controlled impedance structure*


For the example stack below, add a controlled impedance structure to signal layer 4.

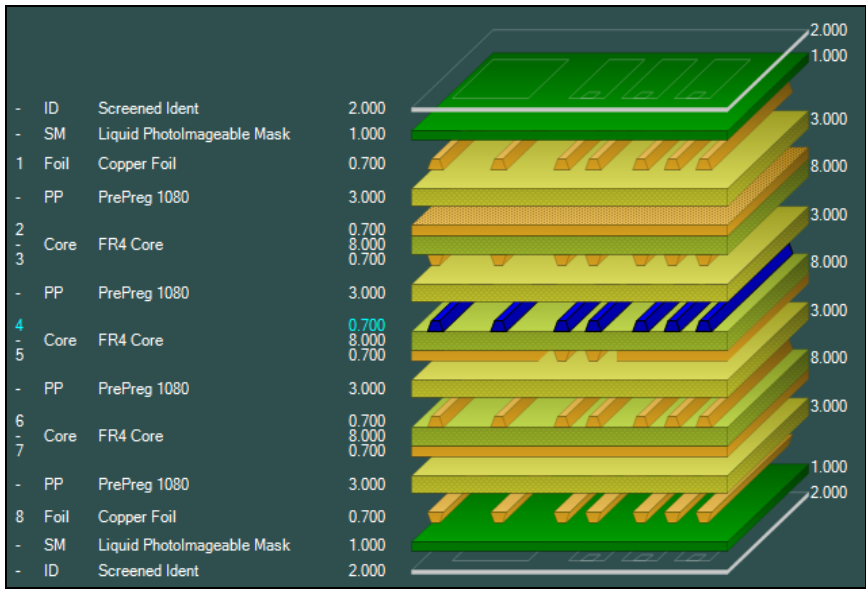


Sample stackup (showing signal layer 4 selected)

Note that in this example Layer 5 is a mixed signal/plane layer. Potential reference planes for Signal Layer 4 are therefore Plane Layer 2, mixed Signal/Plane Layer 5 and plane Layer 7.

With Layer 4 selected, click the Controlled Impedance tab. The Add Structure button is displayed.



Click the Add Structure button; the Structure Control dialog is displayed containing the controlled impedance structures applicable to the selected layer in the stack. Choose values for the target impedance and tolerance. If necessary, resize the Structure Control dialog to view all structures.

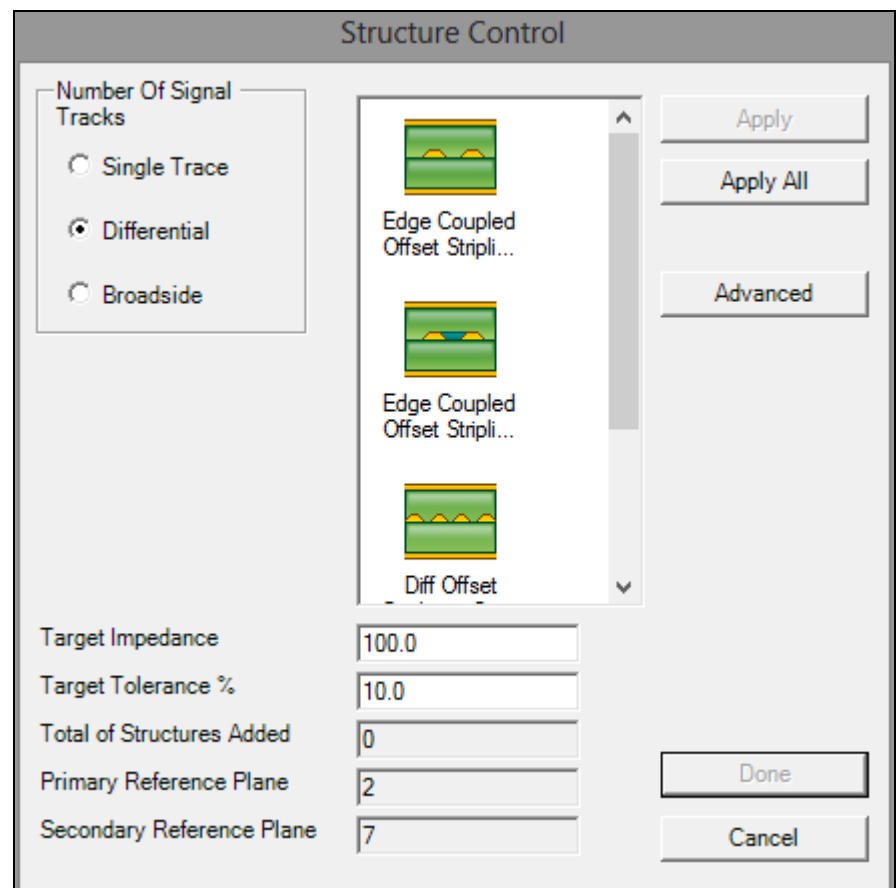


Click the Single Trace, Differential or Broadside option button as appropriate (in this case, choose Single Trace|Offset Stripline 1B1A with a 50 Ohm impedance.)

*Note: Broadside only appears as an option where the signal trace is between two reference planes and Differential is selected.*

Specify the values for Target Impedance and Tolerance.

### Choosing reference planes

As there are multiple reference planes available (layers 2, 5 and 7, it will be necessary to specify which planes to use for this structure. Click Advanced.

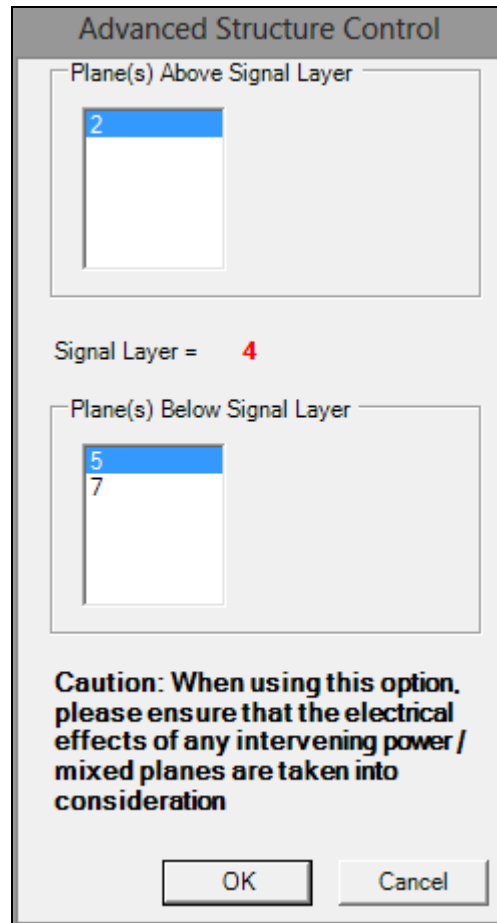


The 'Advanced Structure Control' dialog box is shown. It has two main sections: 'Plane(s) Above Signal Layer' and 'Plane(s) Below Signal Layer'. In the 'Above' section, layer 2 is selected. In the 'Below' section, layers 5 and 7 are listed, with 5 selected. The 'Signal Layer' is set to 4. A caution message is displayed at the bottom: 'Caution: When using this option, please ensure that the electrical effects of any intervening power / mixed planes are taken into consideration'. At the very bottom are 'OK' and 'Cancel' buttons.

Choose a reference plane from the list of available planes. In the example structure plane layer 2, mixed plane 5 and plane layer 7 are available for reference.

*Note: if plane layer 7 is chosen as reference, it will be necessary to take into account the electrical effects of mixed signal/layer plane 5.*

In this example choose mixed signal/plane layer 5. Press OK to confirm. The chosen reference planes are shown below.

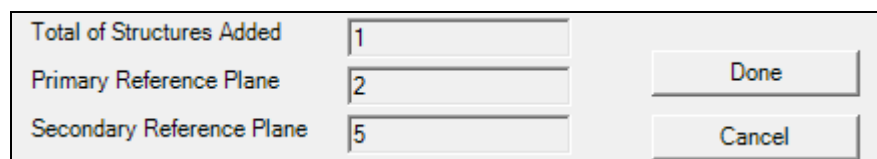


A summary dialog box showing the results of the selection. It contains three rows: 'Total of Structures Added' with the value 1, 'Primary Reference Plane' with the value 2, and 'Secondary Reference Plane' with the value 5. To the right of these rows are 'Done' and 'Cancel' buttons.

Repeat for all structures to be added. Click Apply for each structure then click Done to finish. In this example, choose a single structure.




Layers with controlled impedance structures are indicated by a red Ohms symbol.

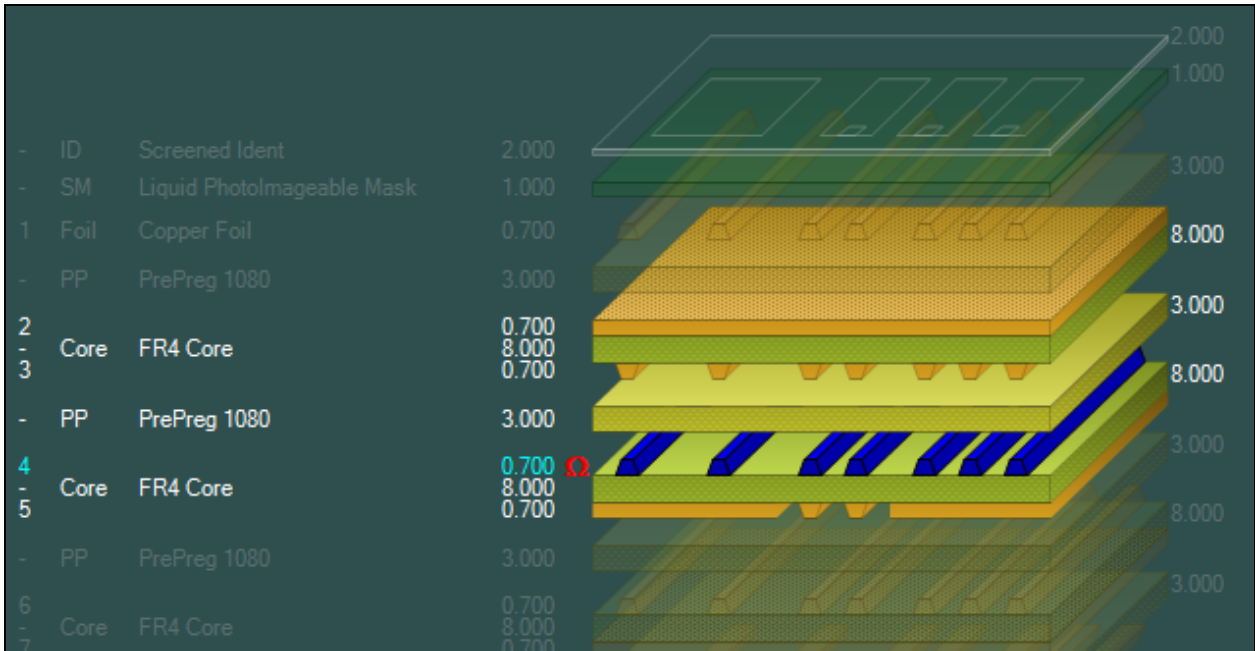

The stackup window changes to reflect the selected signal layer and its associated reference planes.

The applied structure is displayed in the Controlled Impedance pane.

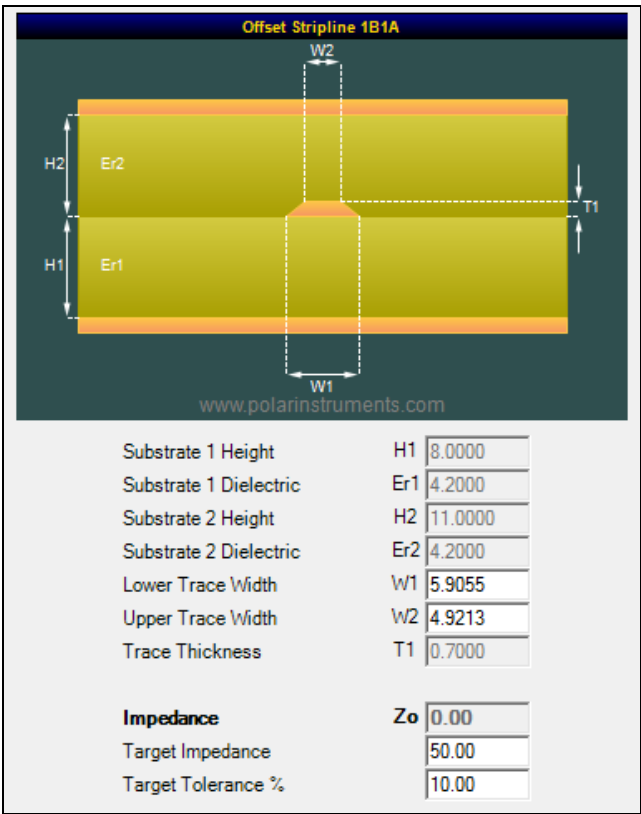

The window displays the parameters of the controlled impedance structure. Fields shown "greyed out" are values derived from the choice of materials in the stackup.



*Calculate Displayed Structure*

For this structure, enter appropriate values for lower and upper trace widths.

Click the Calculate Displayed Structure button to display the impedance value of the structure with the current parameters. The parameters may then be varied to alter the value of the final impedance. In the example above the user can vary the trace width in order to approach the value of the target impedance; other parameters are changed by modifying the stackup dimensions (for example, core thickness H1.)

Hint: clicking Apply All in the Structure Control dialog adds a single instance of all structures matching the stackup layer and the chosen criteria; the user can then choose the structure producing the value nearest the target impedance and delete the structures that are not needed.

### Controlled impedance toolbar

Controlled impedance operations are performed via the Controlled Impedance toolbar.



Add controlled impedance structure to current layer



Delete structure from current layer



Clear all structures from current layer



Refresh and calculate impedance



Calculate structure



Mirror structures




Goal seek



Set CITS test



Free hand notes



Display layer and navigate through structures

### Changing parameter values

Clicking the Calculate function yields a value for impedance. The user can now vary parameters (for example, the dielectric height) to yield a value for impedance closer to the target impedance.

For this example, select the core layers; click the Swap Selected Material button and choose a different core (ensure the same dimensional units are used throughout the structure) and click the Refresh and Calculate Impedance button. The impedance is recalculated to its new value.


To achieve an impedance acceptably close to the target impedance, use the goal seeking function of the Si8000m to alter other parameters (in this case, change the upper and lower trace widths).

### Goal seeking with Speedstack

Speedstack provides the facility to solve for horizontal parameters (e.g. trace width and separation, ground strip separation, etc.) to produce the target impedance (or calculate that the target impedance is unachievable with the current values).



Click the Goal Seek button to display the Set Up GoalSeek dialog; the options available will depend on the controlled impedance structure.

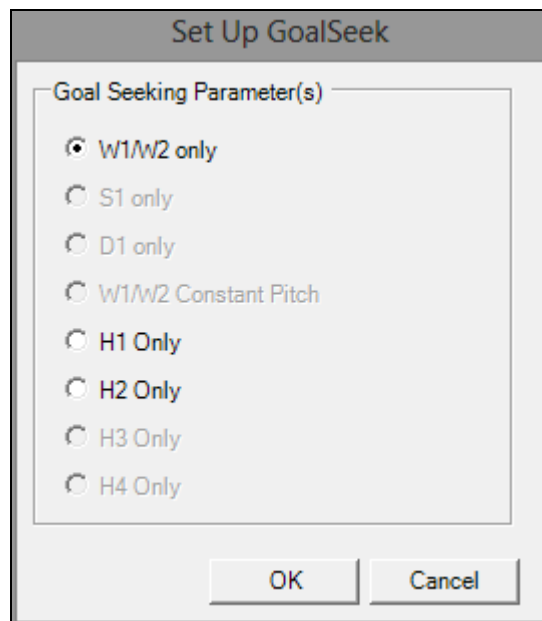

Click OK; the Speedstack attempts to arrive at the target impedance by iteratively modifying the specified parameters. It may be necessary to add or delete prepregs to achieve the target impedance.

## Goal seeking with the Si8000m/9000e

Speedstack Stackup Builder is fully integrated with the Si8000m/Si9000e Controlled Impedance Field Solvers. Users can transfer Stackup layer dimensions to the Field Solver, solve for stackup parameters to produce the target impedance (or calculate that the target impedance is unachievable with the current values) then transfer the solved dimensions back to Speedstack.

Ensure the Field Solver is running and that its units match the Speedstack units.



*To Field Solver*

With the stackup parameters displayed in the Controlled Impedance window, click To Field Solver to transfer the current Speedstack parameters to the Si8000m/Si9000e.



*Paste from Speedstack*

Switch to the field solver and click the Paste from Speedstack button to load the parameters into the associated field solver fields. The field solver reflects the structure and parameters of that selected in Speedstack.

			Tolerance	Minimum	Maximum	
Substrate 1 Height	H1	6.0000	± 0.0000	6.0000	6.0000	Calculate
Substrate 1 Dielectric	Er1	4.2000	± 0.0000	4.2000	4.2000	Calculate
Substrate 2 Height	H2	9.0000	± 0.0000	9.0000	9.0000	Calculate
Substrate 2 Dielectric	Er2	4.2000	± 0.0000	4.2000	4.2000	Calculate
Lower Trace Width	W1	5.9978	± 0.0000	5.9978	5.9978	Calculate
Upper Trace Width	W2	5.0136	± 0.0000	5.0136	5.0136	Calculate
Trace Thickness	T1	0.7000	± 0.0000	0.7000	0.7000	Calculate
Impedance	Zo	50.00		50.00	50.00	Calculate

[More...](#)

For the data shown above seek a final value for impedance of 50 Ohms; H1, Er1 and T1 are fixed, so goal seek on W1,W2.

Click the Upper Trace Width (W2) Calculate button to goal seek on trace width. The field solver returns new values for trace width to produce 50 Ohms final impedance.

Lower Trace Width	W1	5.9907	± 0.0000	5.9907	5.9907
Upper Trace Width	W2	4.9907	± 0.0000	4.9907	4.9907 <span>Calculate</span>



*Copy to Speedstack*

Click the Copy to Speedstack button, switch to Speedstack and click the From Field Solver button to display the solved parameters for the target impedance.



*From Field Solver*

Note: it may be necessary to round some dimensions (for example, the dielectric heights) to the nearest practical values and recalculate the impedance.



## CITS test files

Speedstack can create CITS test file data for each controlled impedance structure in the stack.



Set CITS Test

Select each structure and click Set CITS Test to display the Edit Test data dialog; specify the CITS test parameters for each structure to be tested and click OK.

**Edit Test data**

**Structure Details**

Structure Description: Offset Stripline 1B1A

Impedance: 50.00

Signal Layer: 4

**Channel Select**

☒ Single Ended ☐ Differential

Probe ID: Chan 1

**Horizontal**

Units: Inches

Test From: 3

Test To: 7

Test Method: Absolute

**Vp**

☒ Default ☐ User

**Vertical**

Ohms/Division: 10

**Tolerance**

☒ Locked

Plus: 10 %

Minus: 10 %

OK Cancel

For details on editing and choosing parameters for CITS test files consult the associated CITS User Guide.

### *Exporting the CITS test file*

With the test data specified for each structure, from the File menu choose Export To|Export CITS File. Add descriptive Board Details and notes as required.

**Board Details**

Customer: Polar

Board Type: G308 back plane

Part Number: 1234

Revision Number: Rev 06

Click Make File and navigate to a suitable folder and save the CITS (.cif) test file.

## Working with flex-rigid stackups


### Speedstack Flex

Speedstack Flex allows PCB fabricators and OEM engineers quickly to create and document accurate and efficient flex-rigid PCB layer stackups.

#### *Easy graphical stackup display*

The Speedstack Flex Navigator enables the board designer to link and document as many cross sections as necessary in order to fully document a flex-rigid build up.

Speedstack Flex supports documentation of common flex-rigid constructions, including *doublets* where stacked pairs of flex link two rigid sections of the flex-rigid construction together (see graphic below.)

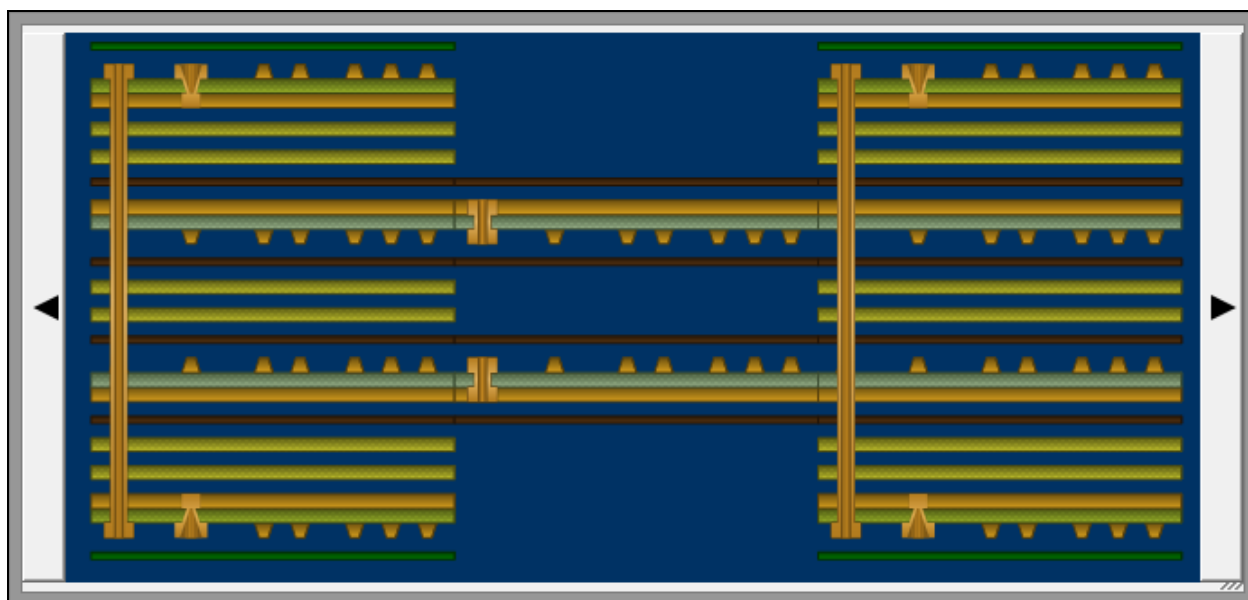

Speedstack's Navigator works from a master stack comprising the full set of materials used in the final stackup and documents each rigid and flex-rigid section with as many "sub-stacks" as needed for the design. There are no limits to the number of sub-stacks or layer count of the total build.

A range of materials including flexible adhesives, bondply and FlexiCore can be enabled or disabled for each layer, and impedance structures can be added to each sub-stack.

#### *Mesh / Crosshatch ground planes*

When used with Polar's Si8000m and Si9000e field solvers, Speedstack Flex permits modelling and documenting

mesh/crosshatch ground planes from within the Speedstack Flex environment. Mesh geometry and structure data can be easily shared between Si8000m and Si9000e.

### *Internal Coverlays*

Advanced rules allow impedance structures to be added when coverlays exist internally within a stack. When a coverlay is beyond the outer copper it will behave like a coating, when internal it will behave like a bondply or prepreg.

### *Definable colours per material*

Speedstack Flex can set and store individual material colours via the material Properties dialog. This will help ensure that special build requirements are obvious during fabrication. This will be found useful for documenting plated layers or highlighting specific material usage such as no-flow prepreps and flexible cores.

## **Enabling Speedstack Flex/HDI**


To enable Speedstack Flex/HDI select Tools|Options and ensure the Licensing pane purchasable option Speedstack Flex/HDI License check box is ticked.

## **Adding a flexible core**


Create and save a symmetrical 6-layer stackup as shown in the sample stack below

-	SM	Liquid Photolmageable Mask	1.000		1.000
1	Foil	Copper Foil	0.700		
-	PP	PrePreg 1080	3.000		3.000
-	PP	PrePreg 1080	3.000		3.000
2	-		0.700		
-	Core	FR4 Core	8.000		8.000
3	-		0.700		
-	PP	PrePreg 1080	3.000		3.000
-	PP	PrePreg 1080	3.000		3.000
4	-		0.700		
-	Core	FR4 Core	8.000		8.000
5	-		0.700		
-	PP	PrePreg 1080	3.000		3.000
-	PP	PrePreg 1080	3.000		3.000
6	Foil	Copper Foil	0.700		
-	SM	Liquid Photolmageable Mask	1.000		1.000

Ensure Symmetrical mode is off, right click the prepreg above Layer 4 copper and add a flexible core:

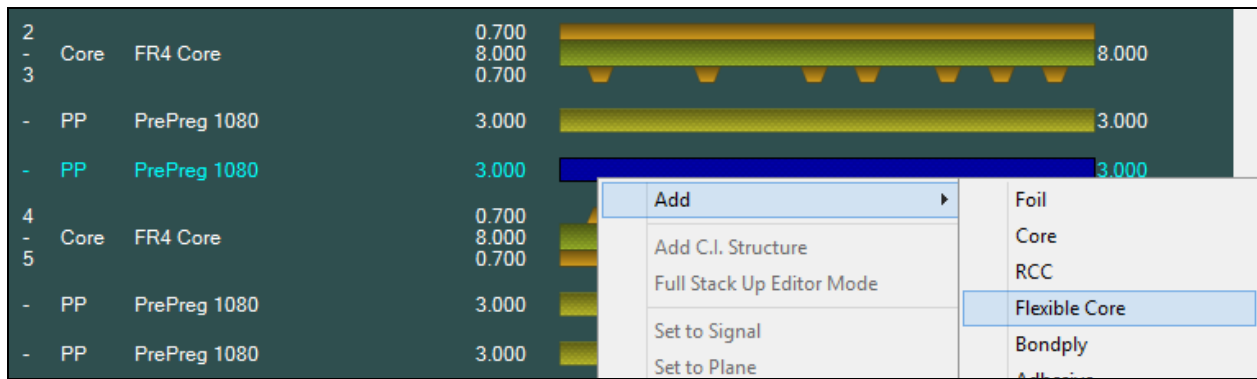

The flexible core is added as the new layers 4 and 5.

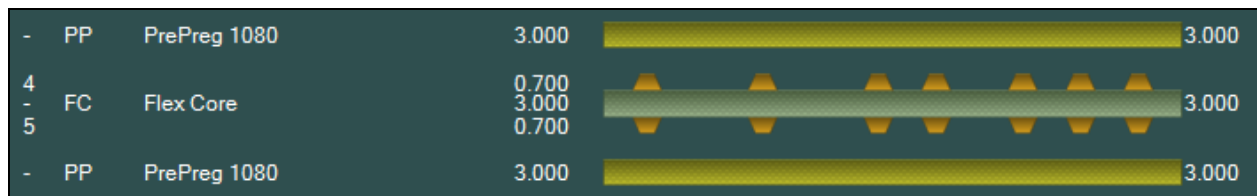

### Using the Navigator


Press F4 to display the Navigator




Right click the Navigator and choose Docking|Float to allow the Navigator window to be resized. The Navigator will move with Speedstack's Stack Editor. Choose Free to allow the Navigator to move independently of the Stack Editor.

### Adding stacks

Select the stack in the Navigator window and click Add Stack and choose Defined by Layers

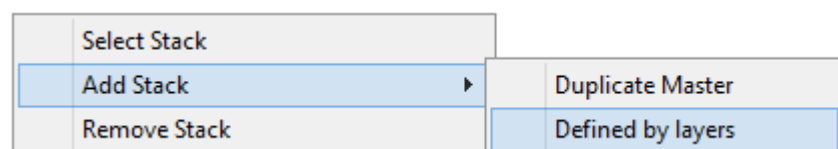


From the drop-down list choose Layer 4 as the Top Layer and Layer 5 as the Bottom Layer as shown below and enter Flex as the Substack Root Name.

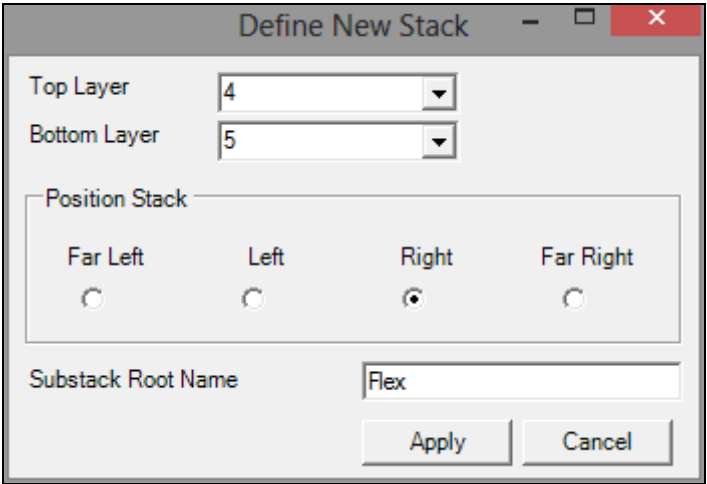


The 'Define New Stack' dialog box contains the following fields and options:

- Top Layer:** A drop-down menu with '4' selected.
- Bottom Layer:** A drop-down menu with '5' selected.
- Position Stack:** A section with four radio buttons: 'Far Left', 'Left', 'Right' (which is selected), and 'Far Right'.
- Substack Root Name:** A text input field containing the word 'Flex'.
- Buttons:** 'Apply' and 'Cancel' buttons at the bottom right.

The new stack is added to the Navigator. Each sub-stack can be renamed individually as required.

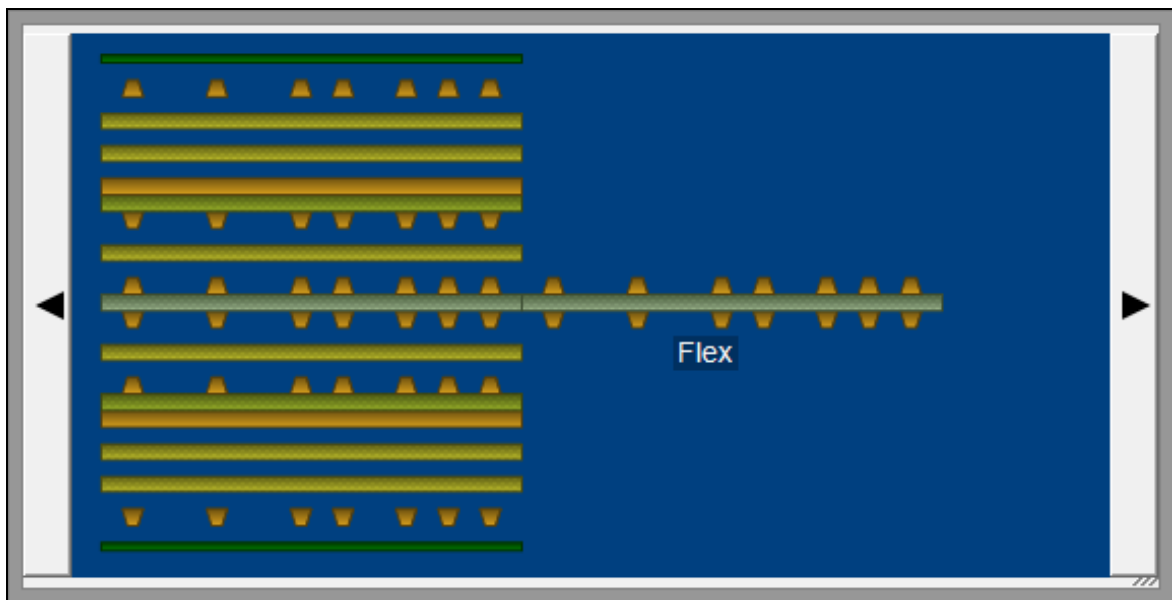


Click the new stack – the selected stack is reflected in the Stack Editor and listed in the status bar. Select Symmetrical mode, in the Stack Editor click the new core and add a coverlay above.

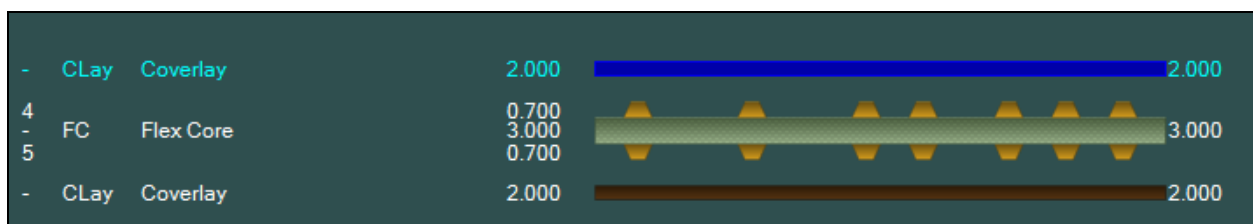

The coverlays are added symmetrically about the core. Changes made in the Stack Editor are reflected in the


Navigator. Click into the Navigator – use the mouse wheel to resize. The Navigator can display in 2D or 3D views.

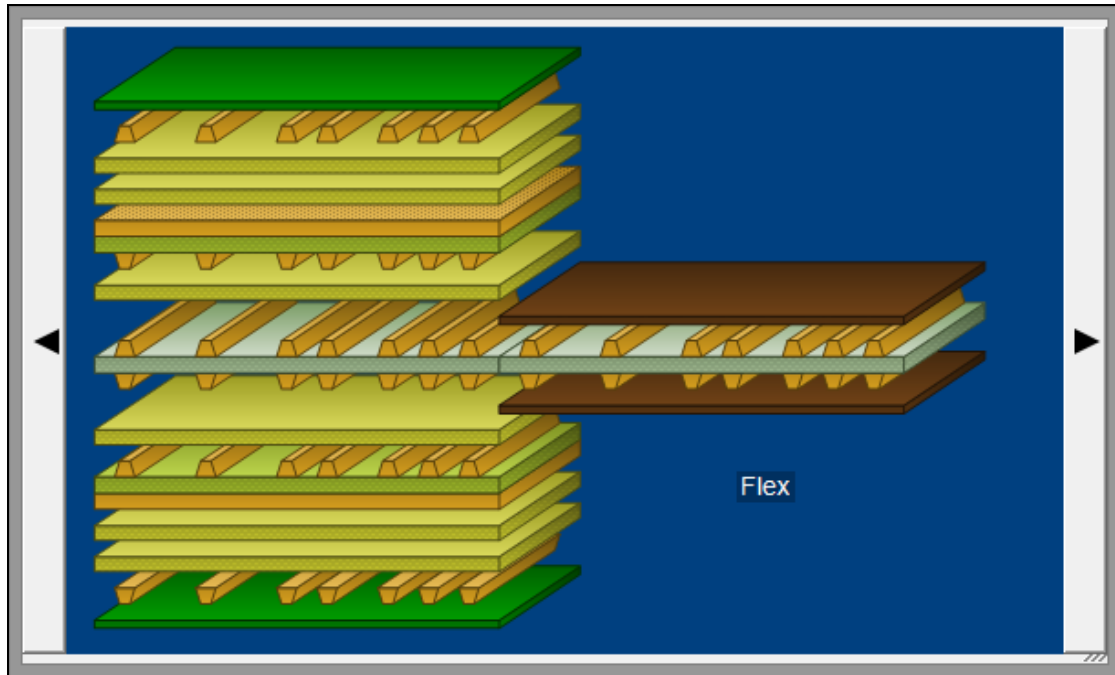

The new stack with its added materials appears in the Navigator; clicking each stack in the Navigator displays it in the Stack Editor and allows editing as described earlier to add controlled impedance structures, change layer types, add non-copper layers, etc.

#### *Adding a new stack*



Right click the Navigator and choose Add Stack|Duplicate Master, rename the new stack and click OK.

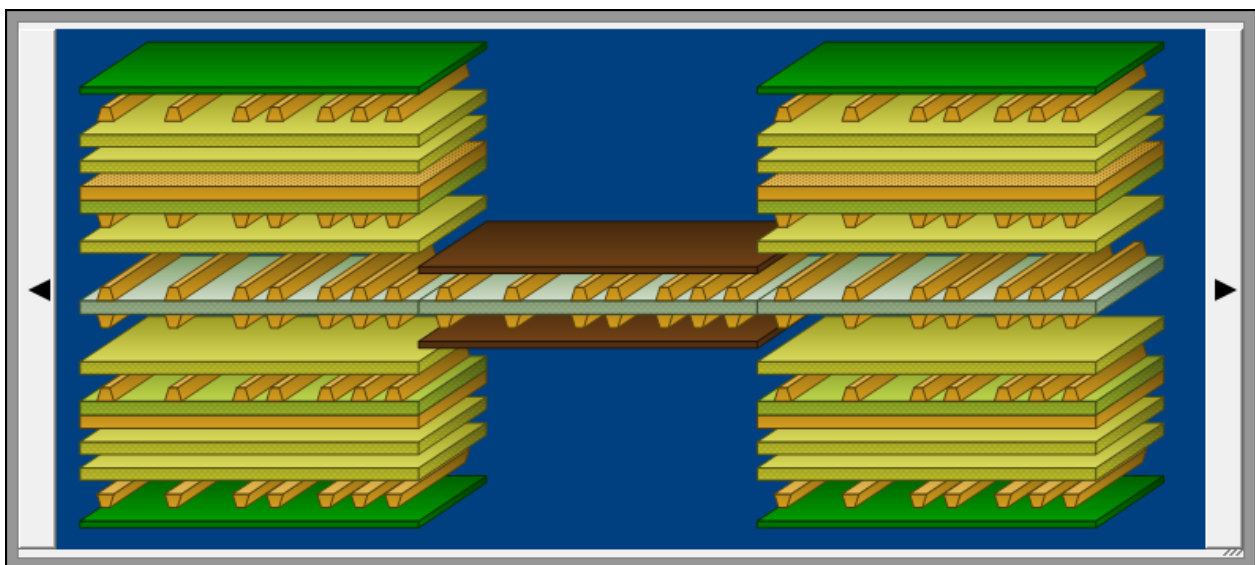

The new stack is added to the Navigator. Click on each stack to display it in the Stack Editor and then edit as required.

### Defining new stacks


New stacks may be added defined by layers of the master stack. Choose Add Stack|Defined by Layers:

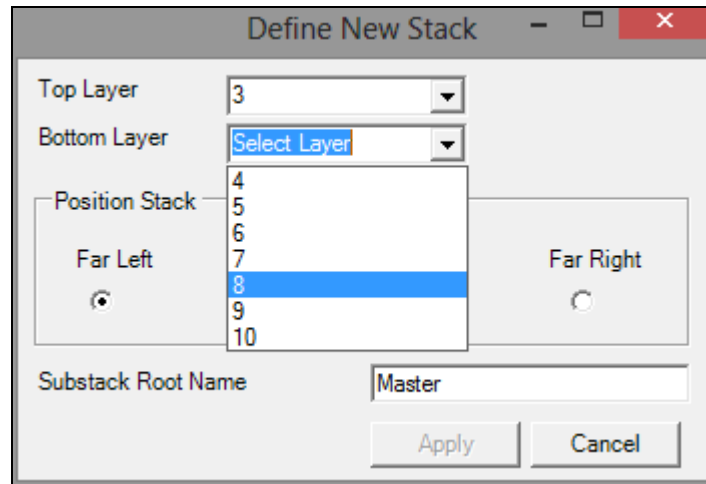

Choose the starting and finishing layers and specify a position for the new stack, choose a descriptive sub-stack root name and click Apply.


### Copying and pasting stacks

To copy a stack in the Navigator select the stack, choose Copy and Paste Stack, then from the dialog below choose the position of the new stack

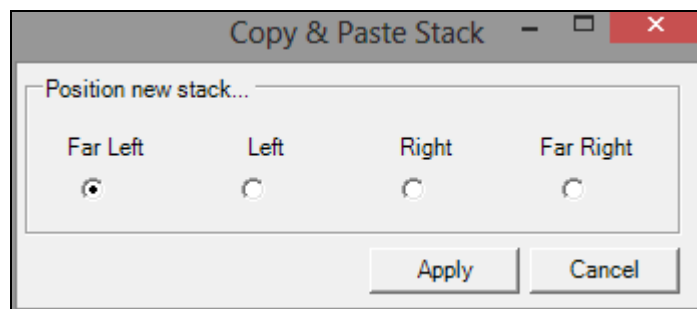

### Removing stacks

To remove a stack right click the Navigator, choose Remove Stack and select the stack to be removed.

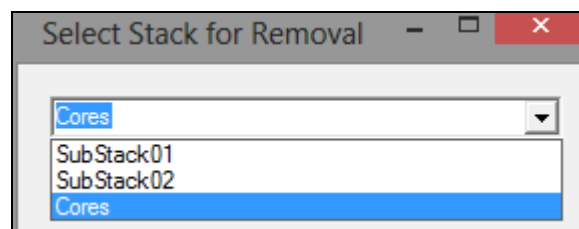

## Working with HDI builds

### **Speedstack HDI**

For HDI PCB fabricators, Speedstack HDI provides the flexibility to quickly calculate the possible impact of substituting alternative materials to improve manufacturability and reduce cost while maintaining the specified parameters and performance of the board.

#### *Easy graphical stackup display*

The HDI navigator provides a rapid guide through the sequential sub-stack lamination sequence and presents the complete assembly in a parsed graphical display that shows each phase of the multi-step lamination sequence of an HDI PCB. User-definable settings within the navigator allow engineers to display layers in transparent, invisible or 3D mode.

#### *Sub-stack reordering*

Speedstack HDI makes re-ordering and renaming sub-stacks quick and easy with the Speedflex Navigator; sub-stacks can be simply moved left or right within the Navigator window.

### **HDI builds**

Use the Speedstack Navigator to document HDI press/drill cycles. Speedstack can document press cycles based on foil locations or drill start and end layers.

#### *Sequential plan*

The Sequential plan command creates sub-stacks that represent each press cycle in a sequential lamination from the Master stack based on foil locations.

#### *Drill plan*


Using Drill Plan, Speedstack determines the sub-stacks by the start / end layers of the drills.

### **Creating the target stack with the Stack Editor**


Consider the target stack below – it will require three press cycles. Build and document the stack in the Stack Editor.

Switch to 2D View.




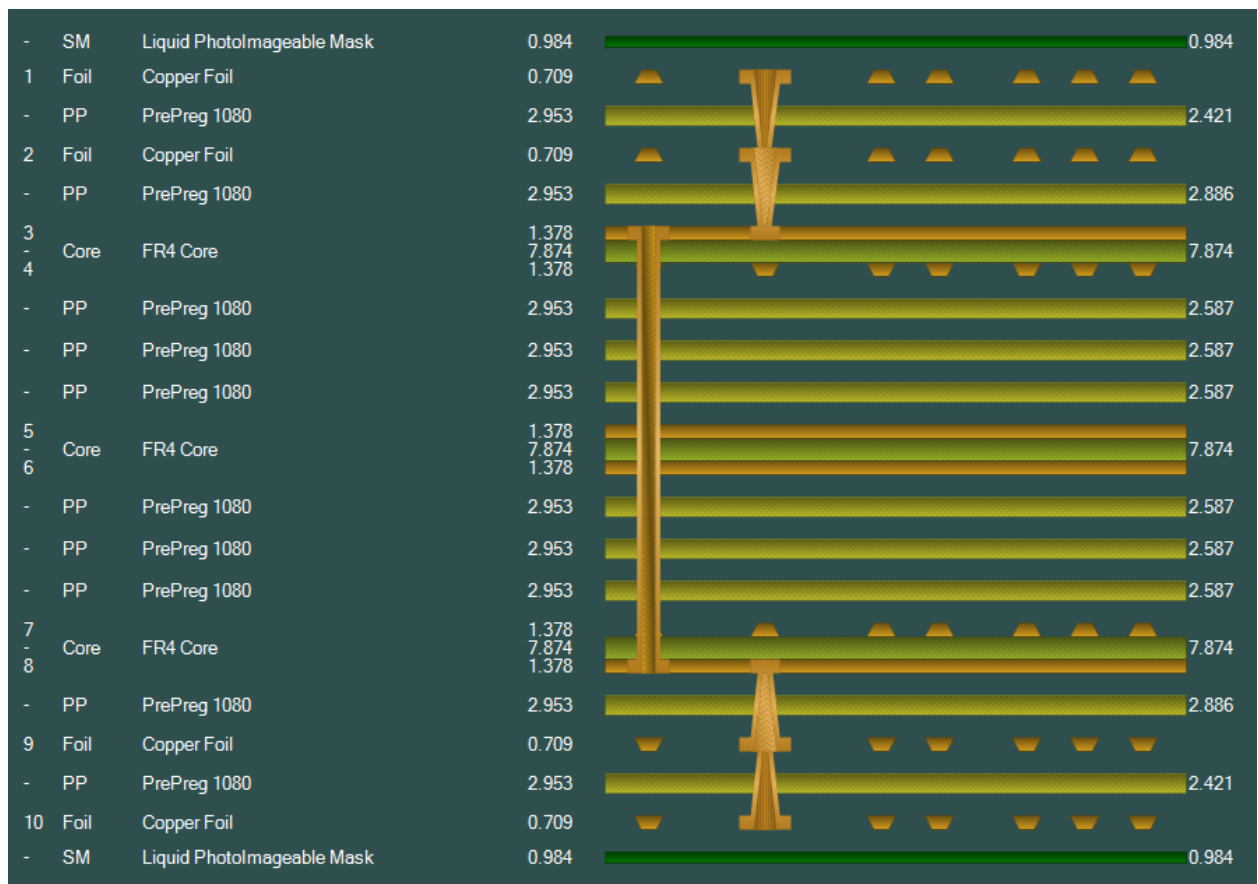

With the target stack completed use the Navigator's Add Stack to document each press cycle, building up the stack in the Navigator. Press F4 to start the Navigator and display the master stack.

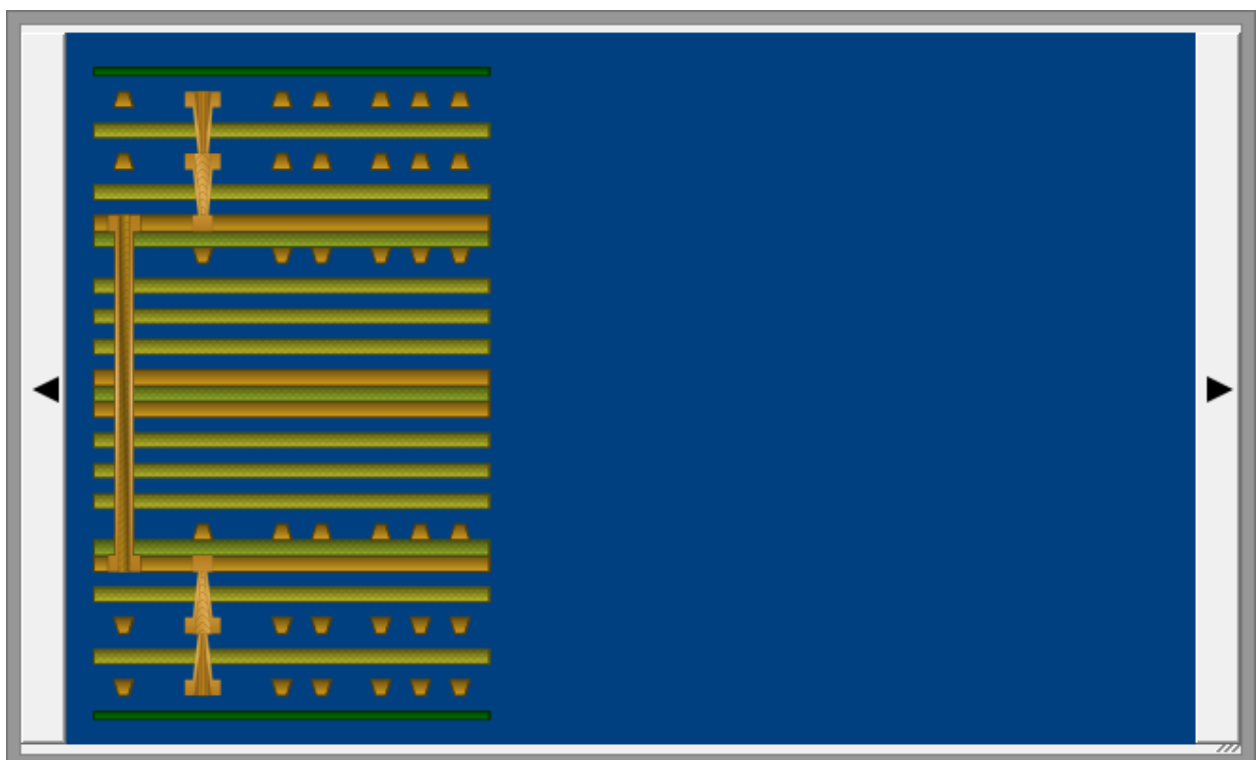


Click Add Stack to copy the stack and name the new sub-stack Press cycle 2.

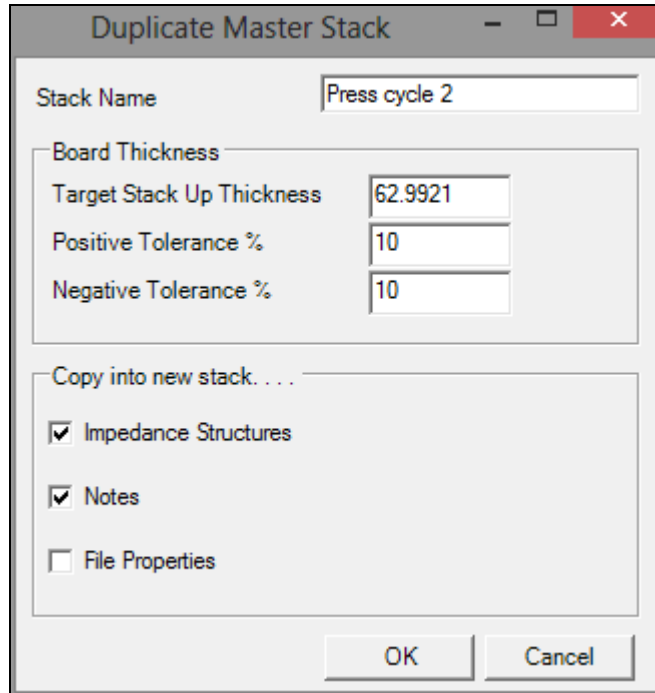


The image shows a 'Duplicate Master Stack' dialog box. It has a title bar with a close button. The 'Stack Name' field contains 'Press cycle 2'. Under the 'Board Thickness' section, 'Target Stack Up Thickness' is 62.9921, 'Positive Tolerance %' is 10, and 'Negative Tolerance %' is 10. The 'Copy into new stack. . . .' section has three checkboxes: 'Impedance Structures' (checked), 'Notes' (checked), and 'File Properties' (unchecked). 'OK' and 'Cancel' buttons are at the bottom right.


Field	Value
Stack Name	Press cycle 2
Target Stack Up Thickness	62.9921
Positive Tolerance %	10
Negative Tolerance %	10
Impedance Structures	<input checked="" type="checkbox"/>
Notes	<input checked="" type="checkbox"/>
File Properties	<input type="checkbox"/>

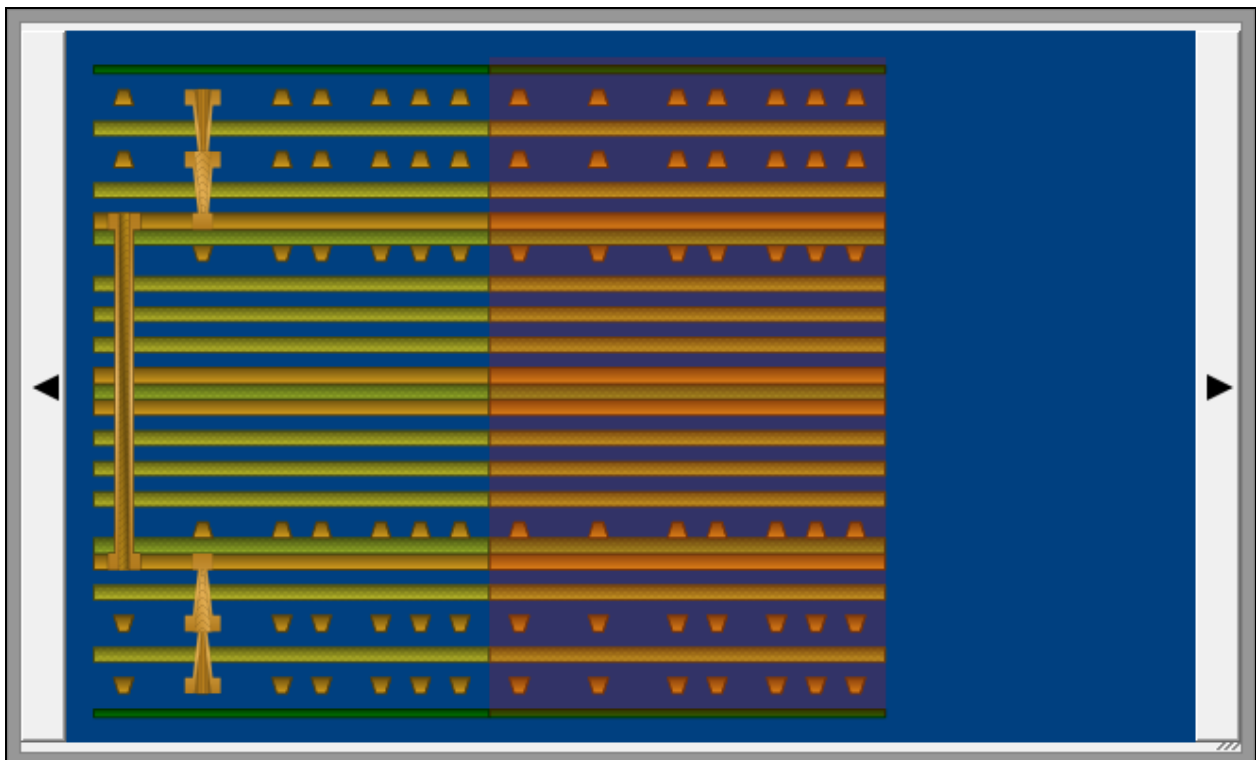

The new sub-stack is copied into the navigator window  
Click the sub-stack to display it in the Stack Editor. In the Stack Editor add the drills and disable the materials that are added in the final press cycle.

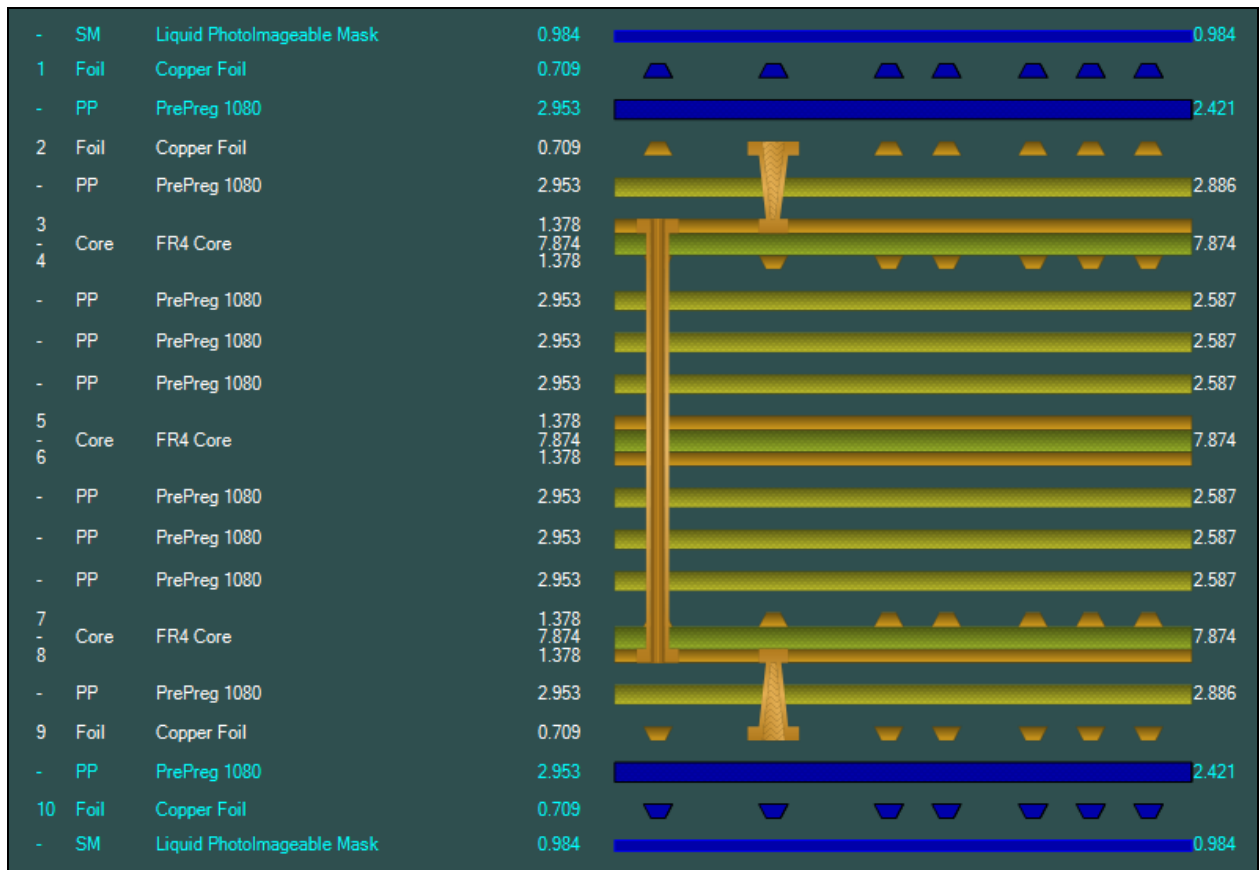


The Navigator displays the second press cycle alongside the master stack.

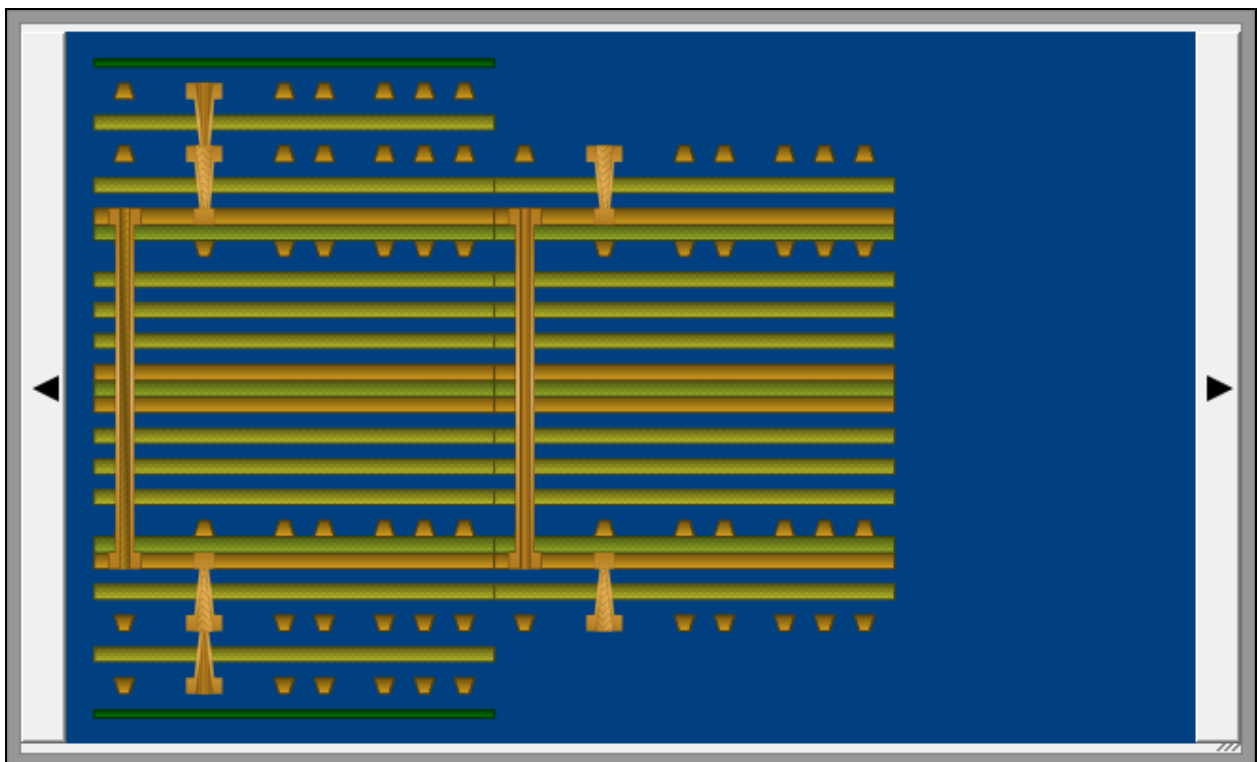


The sub-stack can be displayed either to the right or left of the master stack. Right click the sub-stack and from the context menu choose Move Left.


Sub-stack Press cycle 2 is shown to the left of the master.

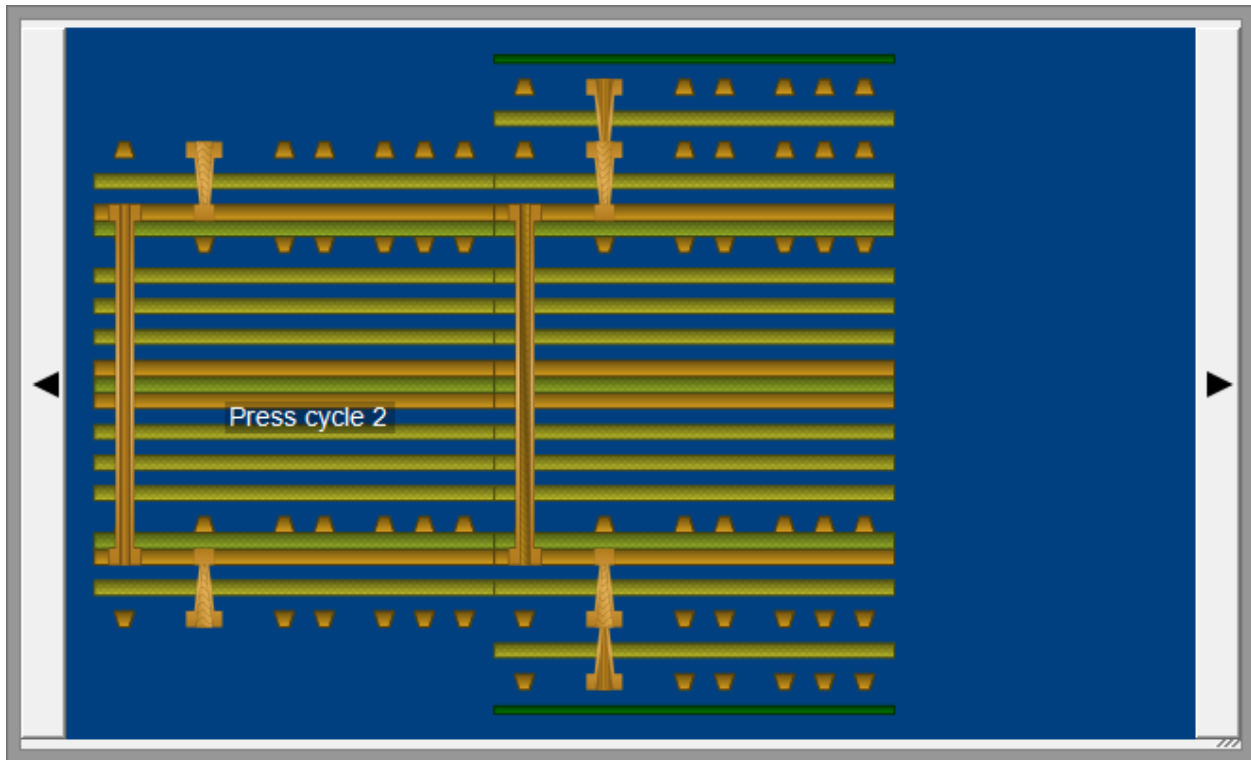

To add the first press cycle right click the sub-stack and choose Copy and Paste Stack and position the new sub-stack to the far left.

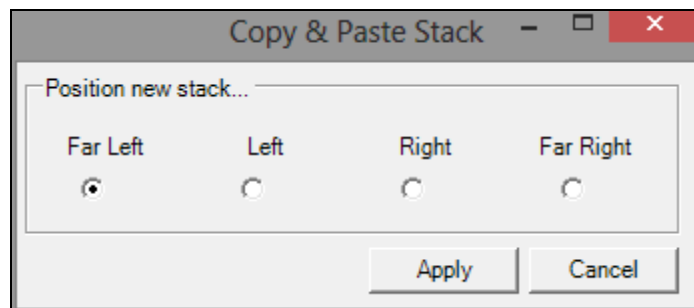


Modify the new sub-stack in the Stack Editor as previously described and display the completed stack in the Navigator.

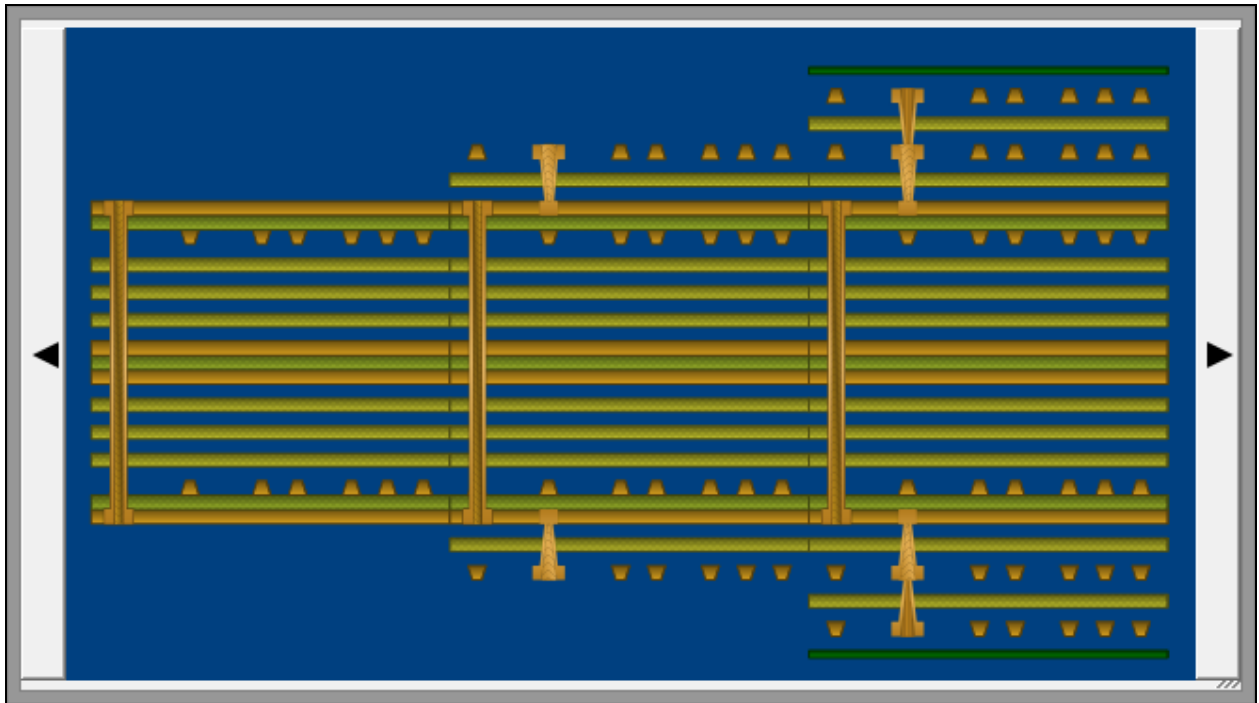

Each press cycle appears as a separate stack in the Navigator.


In the fabrication process the manufacturer will process all the core materials first, prior to bonding where each core is interleaved with prepreg materials. It is sometimes useful, therefore, to see all the core materials on a single sub-stack.

Right click the Navigator window and choose HDI Build|Expose Cores to display the core layers.

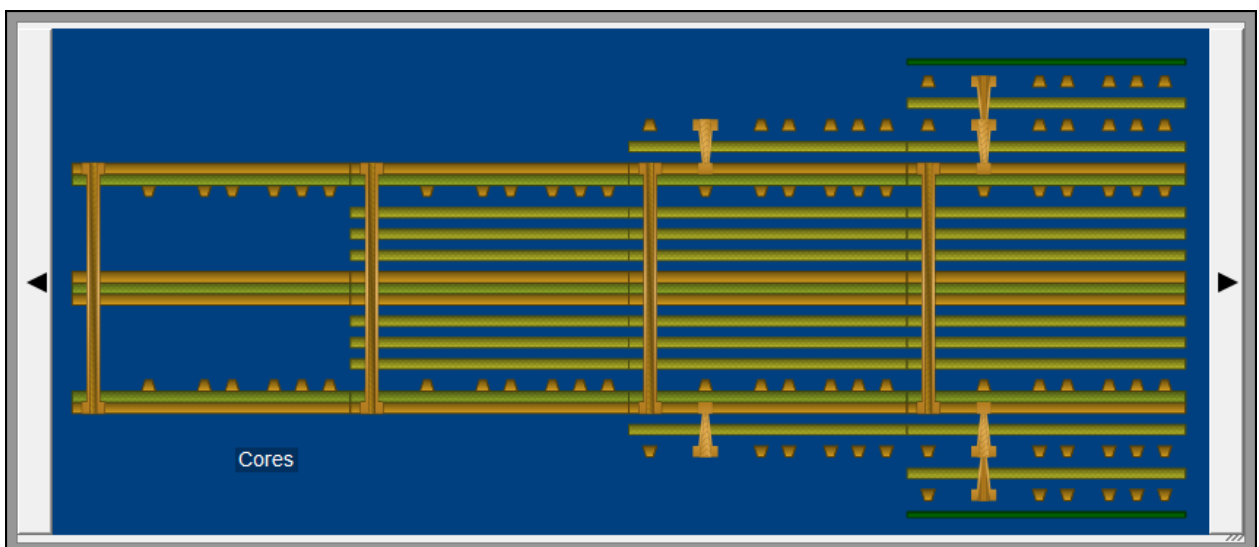


## Using the Sequential Plan


Sequential Plan creates sub-stacks that represents each press cycle in a sequential lamination from Master stack based on foil locations. Consider the 14-layer stack below – this stack will need several press cycles to manufacture.

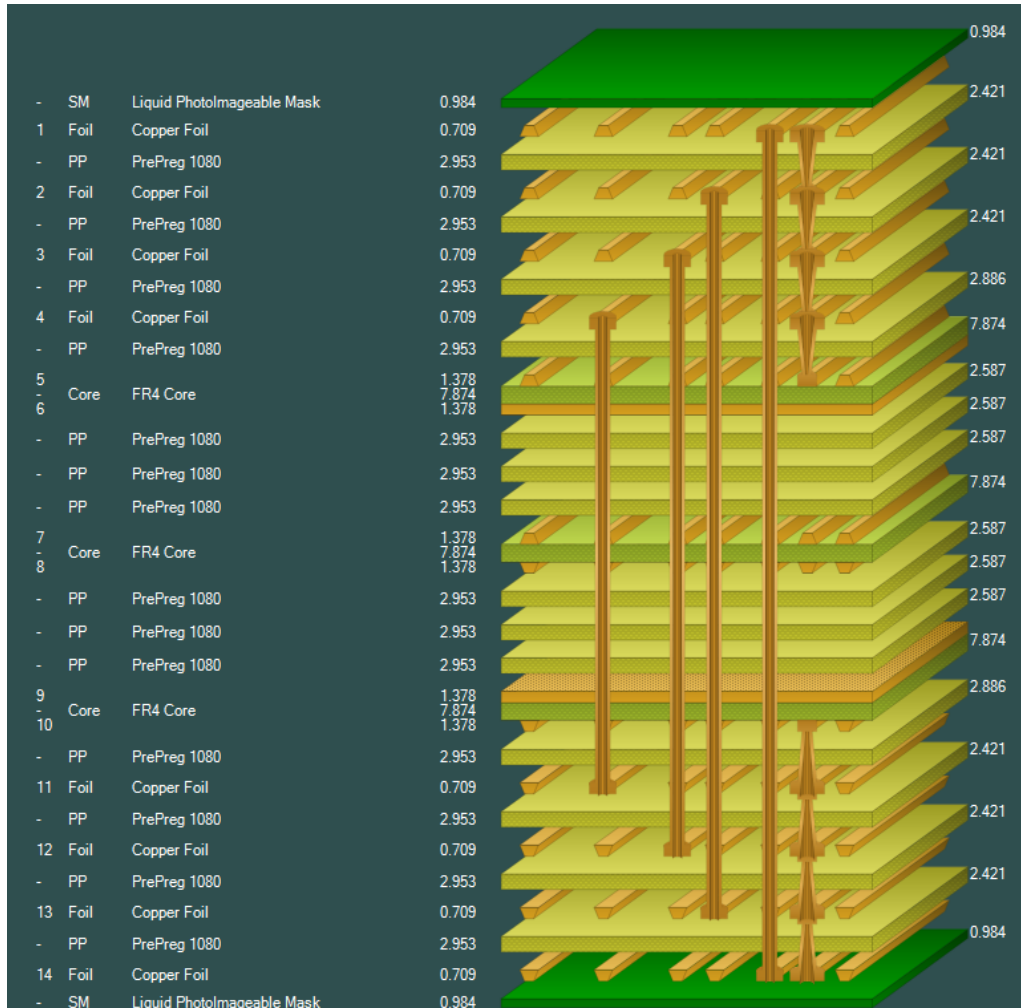


Opening the Navigator will display the completed master stack (shown below) in the Navigator window.

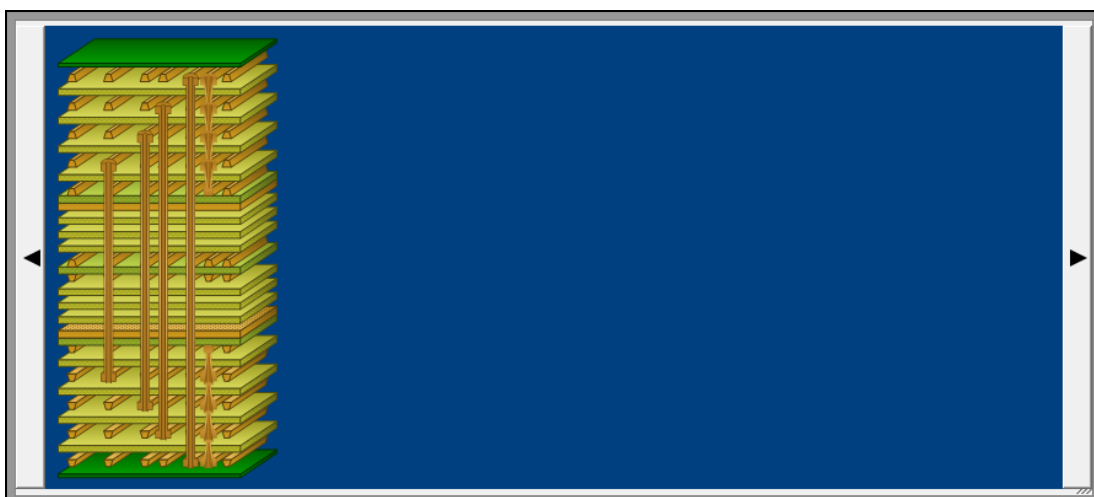


Right click the Navigator window and choose HDI Build | Sequential Plan and name the sub-stacks:

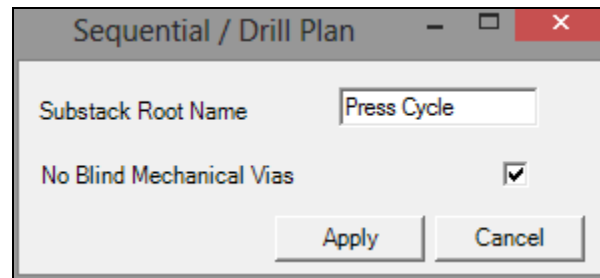

Click Apply – the Navigator displays the 4 press cycles

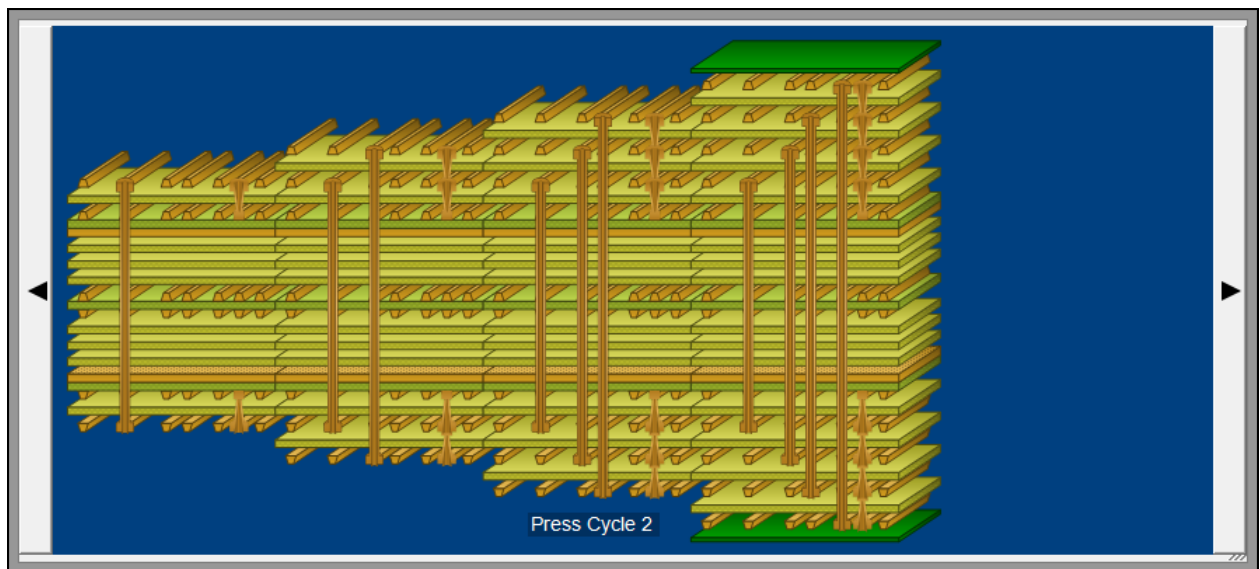


Choose HDI Build | Expose Cores – the cores are displayed in the Navigator window alongside the press cycles.

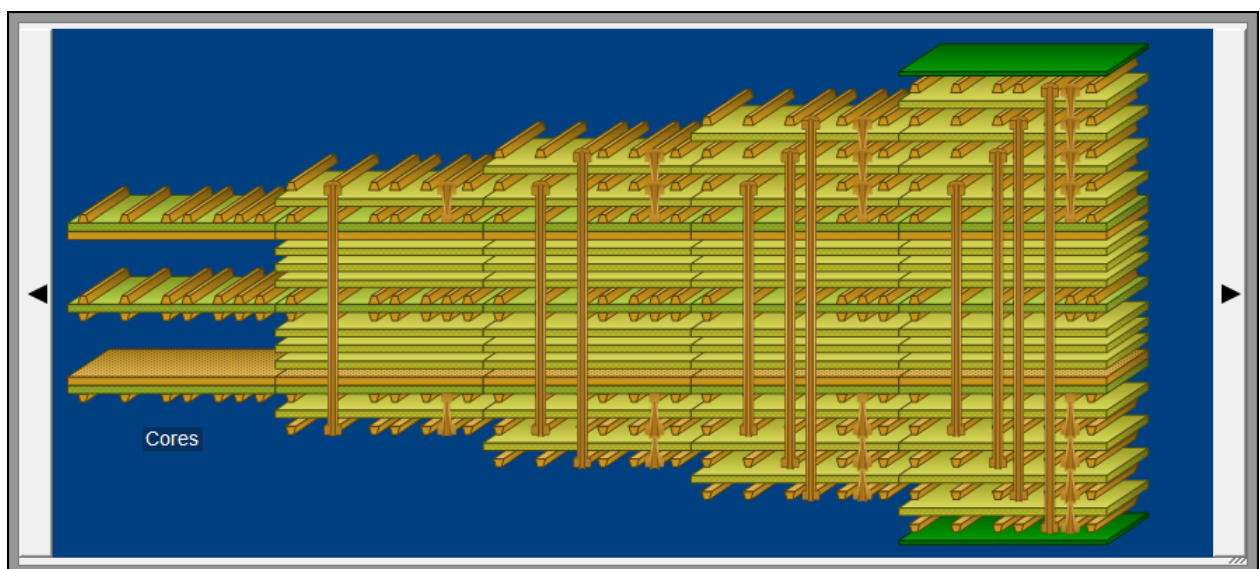


## Using the Drill Plan

The HDI Build|Drill Plan creates sub-stacks that represents each press cycle from the Master stack based on drill start-end layers. Consider the stackup below – a 10 layer sequential lamination construction.

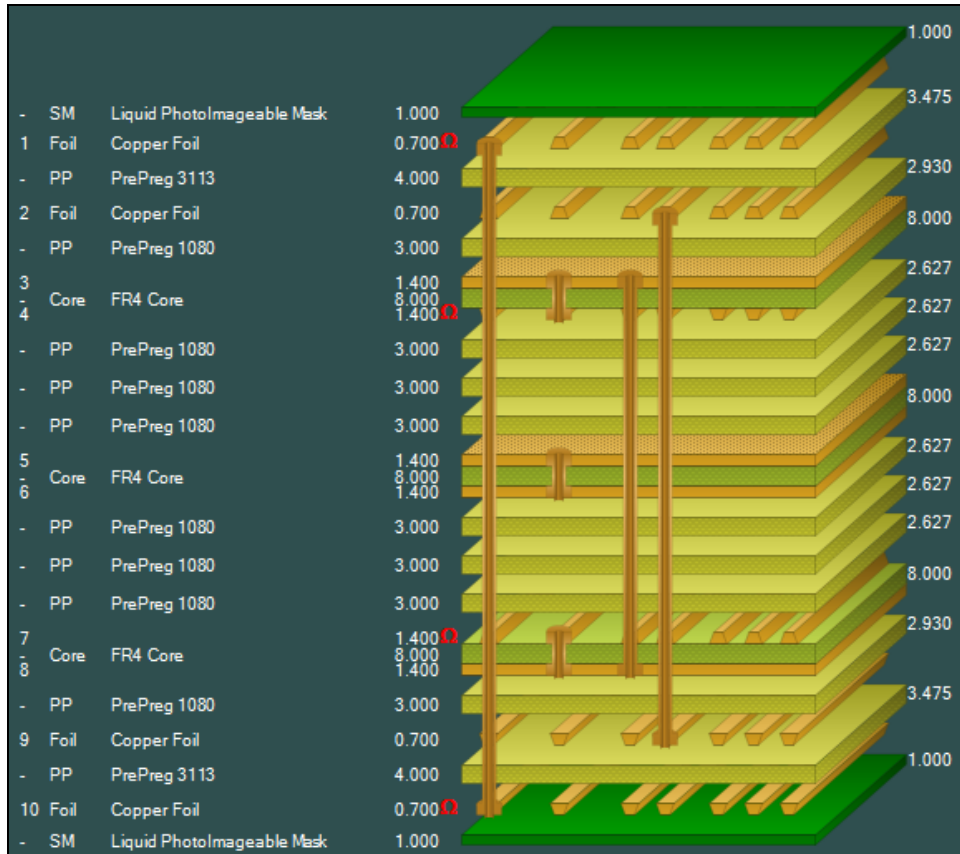


Press the F4 key to open the Navigator

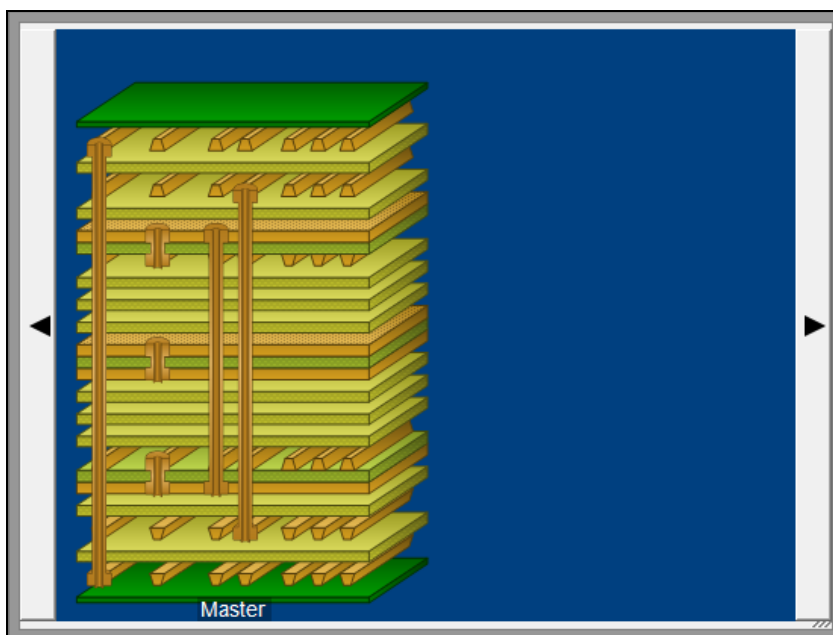


The completed Master stack is displayed. Right click the Navigator and choose HDI Build|Drill Plan.




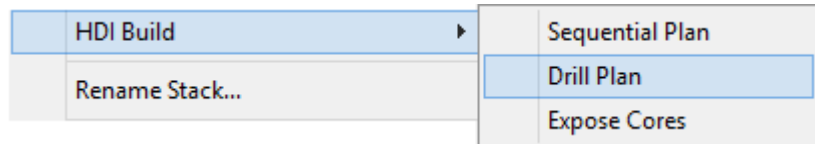

Supply the Sub-stack root name – the name will be used when numbering the press-drill cycles.

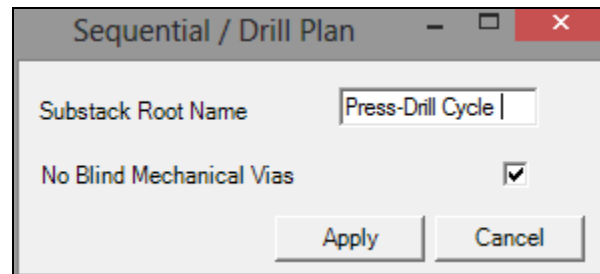


Click Apply – Speedstack documents the build-up stages of the sequential lamination.

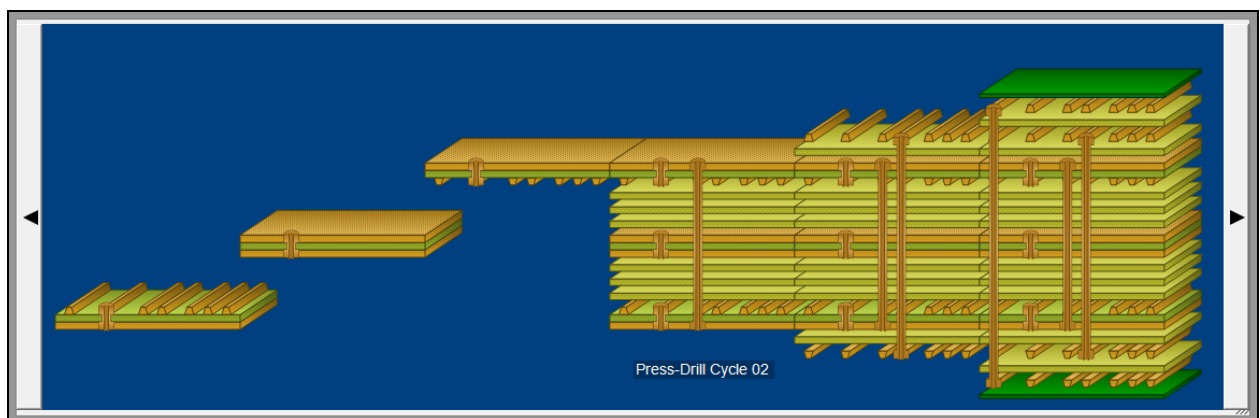

### *Exposing cores*


Right click the Navigator and choose HDI Build|Expose Cores – the cores are shown alongside the press cycles.

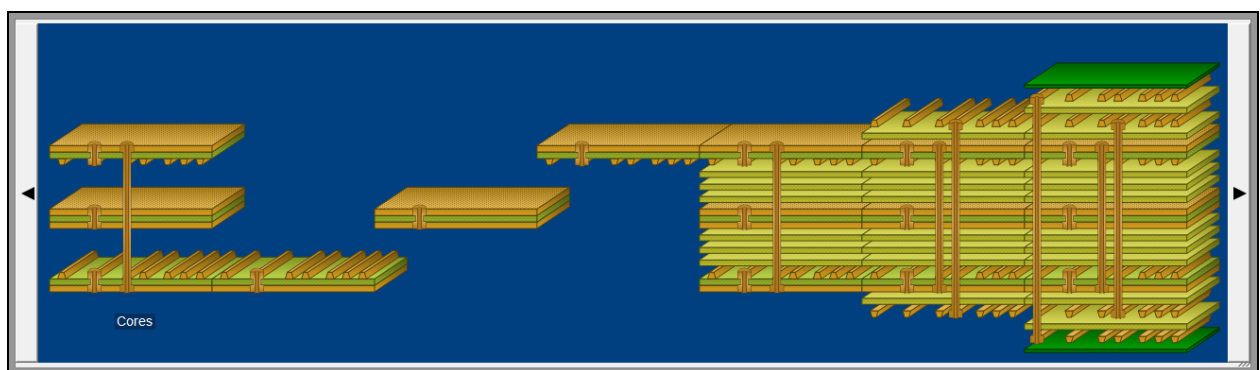


There are no limits to the number of press cycles that may be documented.

### Working with multiple press cycles

The stack below is a 24 layer stack with multiple press-drill cycles. Open the Navigator, choose HDI Build|Drill Plan.

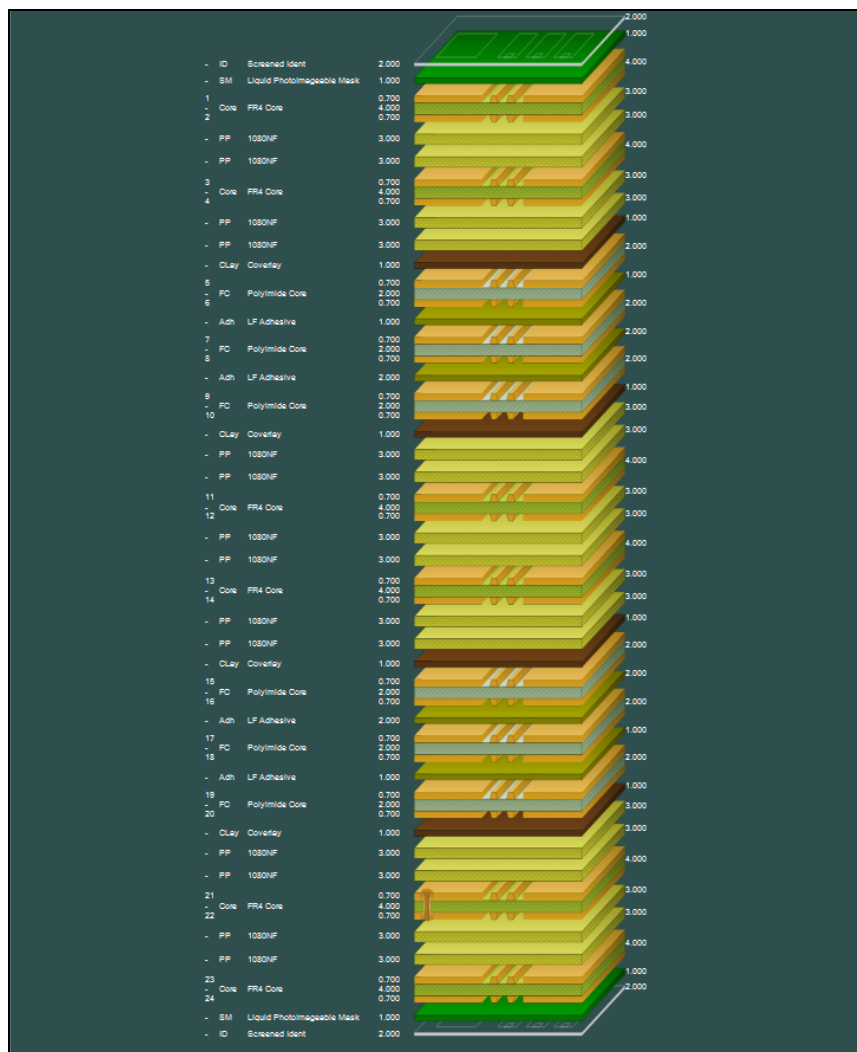

The Navigator displays the drill plan and cores below:

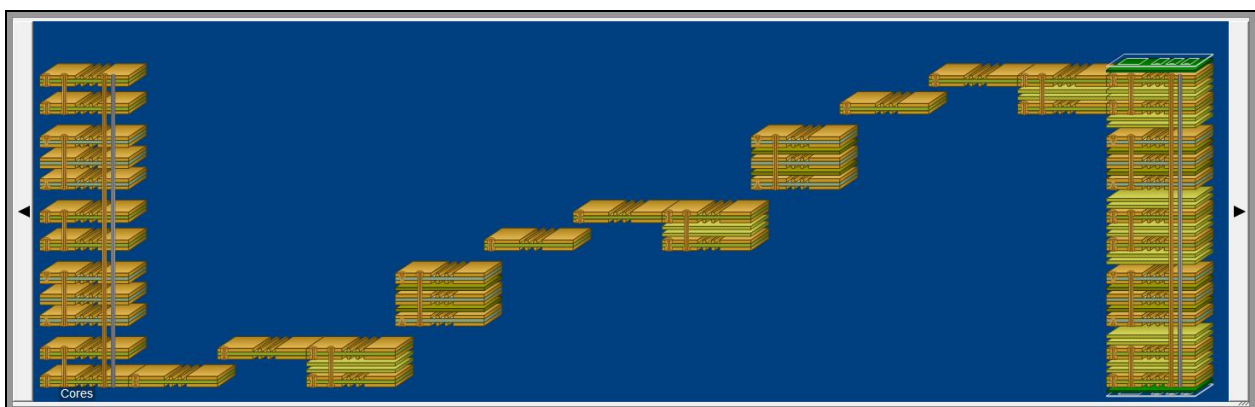

### Printing the Navigator screen

From the File menu choose Print Technical Report – Speedstack prints the Navigator screen with its press cycles along with individual stack data, impedance data and drill data tables.

## Using Speedstack materials libraries

The materials libraries allow designers to manage their own libraries of board materials.




Materials Library


Click the Materials Library button to display the Materials Library window.

### Working with the materials libraries

When Speedstack is started the materials library specified as the default materials library file (via Tools|Options|File Locations) is opened.

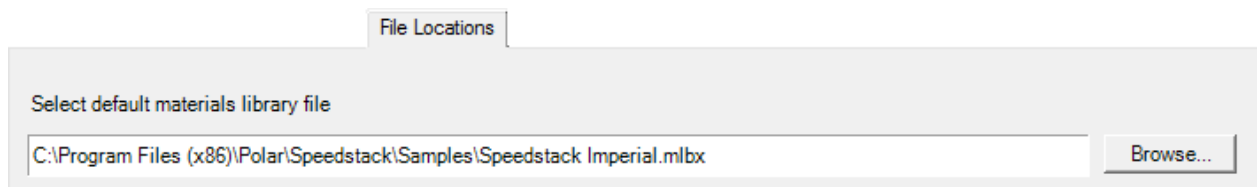

Each library component type is accessible via its associated tab. Click on the tab to view or edit the component type.

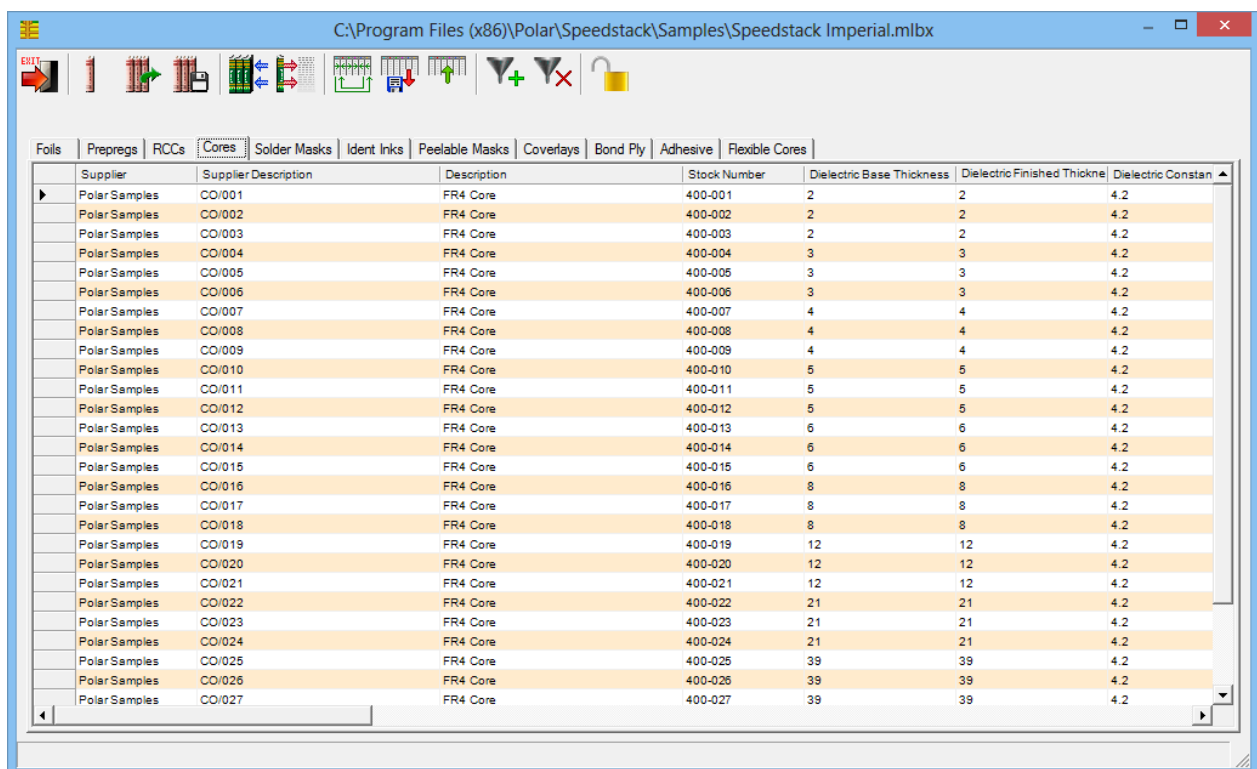

The Materials Library is managed via its toolbar.

## Materials library toolbar

Use the toolbar to load and save libraries, import or export libraries, arrange data columns and filter by data field. The Toolbar is shown below.



Exit Library



Clear Materials Library



Open Materials Library



Save Materials Library



Import CSV Library



Export CSV Library



Select & arrange Column fields



Save column order



Load column order



Set Filter



Clear Filter



Library Lock

## Creating a new library

To create a new library, click Clear Materials Library; the library is removed from the library manager.

Click Save Materials Library to create the new library. To have the library load as the Speedstack starts, specify it as the default materials library file via Tools|Configuration Options|File Locations.



*Clear Materials Library*



*Save Materials Library*

## Adding material to the library

*Caution: ensure consistency of units*

When defining dimensions, e.g. layer thicknesses, for a stackup ensure that all measurements are defined using the same units (mils, mm, etc) throughout the structure and its associated libraries.

Open the library to be modified. To add materials to a library click the associated component type tab; click onto a material, or empty line. An editing box will open which will contain the material clicked on, or the last material in that type library.

Property	Value	Note
Supplier	Polar Samples	
Supplier Description	CO/001	Note 1
Description	FR4 Core	
Stock Number	400-001	
Type	FR4	Note 2
Base Thickness	2.0000	
Finished Thickness	2.0000	
Dielectric Constant	4.2	Note 3
Resin Content	75	
Tg	180	
Td	0	Note 4
CAF Resistance	0	
Z Axis Expansion	0	
Tolerance +/- %	10	Note 5
Upper Cu Thickness	0.7000	
Lower Cu Thickness	0.7000	
Cost	1	
Lead Time	0	
Use in Auto Stack	<input checked="" type="checkbox"/>	
Planes Both Sides	<input checked="" type="checkbox"/>	
Laser Drillable	<input checked="" type="checkbox"/>	

Buttons: Add, Delete, <<, <, 1 of 30, >, >>, OK

The material can be edited or deleted, or a new material can be added. To speed up the process of adding families of materials, when a material is added the properties of the last material are copied to the new material. The details can then be edited. Clicking OK will add any new materials to the end of the list.

## Importing material to the library

Speedstack allows users to add existing material lists to its library; material data must be arranged in the format and order used by the Speedstack library.

Sample files in comma separated value format and Microsoft Excel spreadsheet and template formats suitable for importing to the Speedstack are included in the Speedstack Material Library Import folder.



Import CSV Library

Click the Materials Library button to open the Library, and then click Import CSV Library to open the Import dialog.

Choose Start New Library or Append to Existing Library as appropriate.

### *Creating a new materials library*

Choose the Start New Library option and choose the field delimiter type.

The library import function can accept files in a variety of formats, tab delimited, comma separated and Excel worksheet and template formats.

Sections of the sample files suitable for Speedstack are shown below.

	A	B	C	D	E	F	G	H	I
1	* Cores								
2	*							Dielectric	Dielectric
3	*Type	Supplier	Supplier Description	Description	Stock Number	Upper Cu Thickness	Lower Cu Thickness	Base Thickness	Finished Thickness
4	FR4	Polar Samples	CO/001	FR4 Core	400-001	0.018	0.018	0.05	0.05
5	FR4	Polar Samples	CO/002	FR4 Core	400-002	0.035	0.035	0.05	0.05
6	FR4	Polar Samples	CO/003	FR4 Core	400-003	0.07	0.07	0.05	0.05
7	FR4	Polar Samples	CO/004	FR4 Core	400-004	0.018	0.018	0.075	0.075
8	FR4	Polar Samples	CO/005	FR4 Core	400-005	0.035	0.035	0.075	0.075
9	FR4	Polar Samples	CO/006	FR4 Core	400-006	0.07	0.07	0.075	0.075
10	FR4	Polar Samples	CO/007	FR4 Core	400-007	0.018	0.018	0.1	0.1
11	FR4	Polar Samples	CO/008	FR4 Core	400-008	0.035	0.035	0.1	0.1

Sample library file in Microsoft Excel format

```
* Cores,,,,,,,,,,,,,,,,,,,,,
*,,,,,,Dielectric,Dielectric,Dielectric,Dielectric,Dielectric,Dielectric,Dielectric,Dielectric,Dielectric,,,,,
*Type,Supplier,Supplier Description,Description,Stock Number,Upper Cu Thickness,Lower Cu Thickness,Base Thickness,Finished Thickness,
Content,Tg,Td,CAF Resistance,ZAxisExpansion,ExcessResin,Tolerance,Cost,Lead Time,Notes 1,Notes 2,Notes 3,Notes 4,Notes 5,Size
FR4,Polar Samples,CO/001,FR4 Core,400-001,0.018,0.018,0.05,0.05,4.2,75,180,0,0,0,0,10,0,0,,,,,*
FR4,Polar Samples,CO/002,FR4 Core,400-002,0.035,0.035,0.05,0.05,4.2,75,180,0,0,0,0,10,0,0,,,,,*
FR4,Polar Samples,CO/003,FR4 Core,400-003,0.07,0.07,0.05,0.05,4.2,75,180,0,0,0,0,10,0,0,,,,,*
FR4,Polar Samples,CO/004,FR4 Core,400-004,0.018,0.018,0.075,0.075,4.2,60,180,0,0,0,0,10,0,0,,,,,*
```

Sample library file in comma separated format

Files for importing into the library must be in the above format, with columns in the correct order.

Specify the delimiter if necessary and choose the file type (Foil, RCC, Prepreg, etc.) and units for import and click Apply. Choose the file from the list displayed in the Open dialog and click Open. Repeat the procedure for every file type; Click Done when all file types have been imported.

Save the file as a .mlbx library file.

### Adding material data to an existing library

To add material data to an existing library, open the library click Import CSV Library, click the Append to Existing Library and click Apply. Choose the .csv or .txt file and click Open then click Done. Save the modified Library file as a .mlbx file.

## Selecting Materials from the Library

### Column Order (Materials Library)

The default setting displays all columns. The columns displayed and the order they are displayed can be set in the materials Library form.


### Arranging Columns in Library Forms

The Library windows can be customised in respect of which columns to display and in which order.



Arrange Columns

Click the Go to Materials Library button and select Arrange Columns; the dialog associated with the selected material tab (Foil, Prepregs, etc.) is opened.

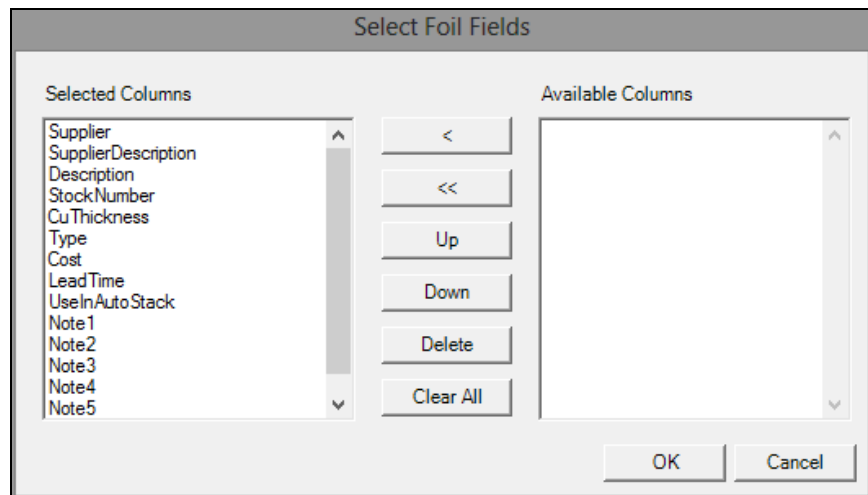

The Left box of the dialog shows the columns that will be displayed and the order top to bottom is the order they will be displayed left to right in the library window.

Click OK to return to the Materials Library, which will show the columns as set.



*Save Column Order*



*Load Column Order*

Until the column order is saved the column order is only available during the current session. Click Save Column Order to define the selected column order as the default order whenever the program is run.

Click Load column Order to apply a saved column arrangement.


## Filtering Materials

When adding or swapping materials, available materials (Foil, Prepregs, etc.) are listed in the associated material library dialog. Lists can be filtered for materials matching desired parameters (dielectric thickness, Er, etc.)



*Set Filter*

In the library window click the Set Filter to display the Set Filter String dialog.

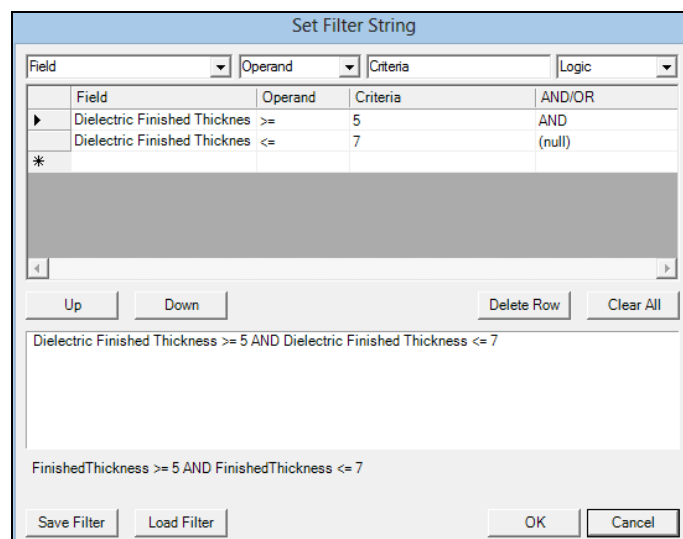



Filter strings can be created and saved for future use. To save click Save Filter, to recall an existing filter click the Load Filter button, choose the filter (.mlf) file and click OK.

#### *Building the filter string*

Build the filter string by selecting parameters, operands and criteria from the drop-down boxes. If the AND/OR box is selected another row is automatically added to the grid. The filter language is a sub-set of common database commands.

Use the Up/Down buttons to select a row for deletion. The arrowhead at the side of the grid indicates the selected row.

Click OK to apply the filter immediately to the selected library. If desired, save the filter string for future use. (The Speedstack provides for interaction between the library dialog and filter form. This allows complex strings to be built line-by-line and tested without saving until the string is completed.)

When saving the filter choose a descriptive name for the file that reflects the purpose of the filter. The Speedstack automatically names the files for the material type.

#### *Using the Like operator*

Use the Like operand to filter results via wild card characters. The characters \* and % can be used to represent groups of starting or ending characters.

For example, specifying Like 'Po%' or 'Po\*' as the criterion for the Suppliers field will show all suppliers beginning with 'Po'.

Similarly, specifying Like '%es' or '\*es' as the criterion for the Suppliers field will show all suppliers ending with 'es'.

Click the Clear Filter to remove the filter and display all materials of the selected type.



Clear Filter



Library Lock

#### *Locking the library*

The materials library can be locked and password protected to prevent unauthorised or accidental editing. If no password has been set then the Material Library remains open for any changes and modifications.

To lock the library, click the Library Lock button and supply a password; the library is then locked and any editing requires the password to be entered (via clicking on the padlock). Once unlocked it will remain unlocked until Speedstack is closed or the padlock is clicked again.

## Printing stackup information

To print the stackup information, choose the Print command. Print Technical Report includes stack details, controlled impedance structures, drill specifications and information entered into the Stack File Properties.

**Speedstack Report Printer**

File Options

Display Page 1

C:\Program Files (x86)\Polar\Speedstack\Sample\101\Impedance.ssk Unit: Microns

Layer	Stack up	Description	Type	Processed Thickness	Mask Thickness	Color	Z	Impedance ID
1		Liquid Photoimageable Mask	SolderMask	25.400	Green	4.000		
2		Copper Foil	Copper	17.780				1, 2
3		PrePreg 1080	Dielectric	49.530		4.200		
4		FR4 Core	FR4	35.560		4.200		
5		PrePreg 3080	Dielectric	70.510		4.200		
6		PrePreg 1051	Dielectric	141.021		4.200		
7		PrePreg 1051	Dielectric	141.021		4.200		
8		FR4 Core	FR4	35.560		4.200		3
9		PrePreg 1051	Dielectric	141.021		4.200		
10		PrePreg 1051	Dielectric	141.021		4.200		
11		PrePreg 3080	Dielectric	70.510		4.200		
12		FR4 Core	FR4	35.560		4.200		
13		PrePreg 1080	Dielectric	49.530		4.200		
14		Copper Foil	Copper	17.780				4
15		Liquid Photoimageable Mask	SolderMask	25.400	Green	4.000		

Structure Image	Impedance ID	Structure Name	Impedance Signal Layer	1st Plane 1 in Layer	Lower Trace Width	Upper Trace Width	Trace Separation	Target Impedance	Calculated Impedance	Tol (+/- %)
	1	Edge Coupled Coated Microstrip 1B	1	3	215.900	190.500	206.118	100.000	100.240	10.000
	2	Coated Microstrip 1B	1	3	114.300	88.900	0.000	75.000	75.780	10.000
	3	Edge Coupled Offset Stripline 1B1A	4	3	184.150	158.750	215.900	100.000	101.280	10.000
	4	Coated Microstrip 1B	8	5	114.300	88.900	0.000	75.000	75.780	10.000

Drill Image	1st Layer	2nd Layer	Column Position	Drill Type
	1	8	1	Mechanical PTH

Stack Name: Master  
Date: Associated Documents  
Author:  
Department:  
Site:

Version:  
Revision:  
Modification:  
Date of Revision:  
Editor:

Page 1/1

Polar

## Speedstack Report Printer toolbar

The Speedstack Report Printer toolbar provides shortcut access to the most commonly used printing commands.



Use these commands to set up the printer, page orientation and margins, font size and printing order, select data columns for display, display or suppress data tables and choose the on-screen zoom levels. Button functions are described below.



Send report to printer



Print set up – choose printer, print range, copies



Page set up – orientation and margins



Select stack data columns



Select impedance data columns



Select drill data columns



Change font size



Select stack/drills/impedance/notes print order



Set note field aliases



Display/suppress stack data table



Display/suppress controlled impedance data table



Display/suppress drill data table



Zoom in



Zoom out



Fit page to viewer



Preview one page



Preview two pages



Preview four pages

## Speedstack Report Printer menu system

### File menu

Use the File menu under the Printing window to save and load print settings.

Save Print Settings	
Load Print Settings	
Exit	Ctrl+Q

Whichever settings were last used in a session will become the default when the Printing window is next loaded.

### Options menu

The Speedstack Report Printer Options menu contains all the settings for printing.

Page Setup	
Stack Data Table	▶
Controlled Impedance Data Table	▶
Drill Data Table	▶
Note Field Aliases	
Print Order	
General	▶
Restore Default Settings	

#### *Page Setup*


Page Setup displays the Page Setup dialog to change paper size and orientation, paper source and margins.

#### *Stack Data Table*

The Stack Data Table commands allow for optional display of stack parameters, drills, thickness totals and tolerances.

Suppress	
Stack Data Columns...	
Drills (Stack Table)	▶
Thickness Totals	▶
Show Stackup Thickness...	▶
Stackup Thickness Tolerance Value	▶
Stackup Thickness Accuracy	▶

Stack Data Columns: select, combine and order the data columns available for the stack as desired.

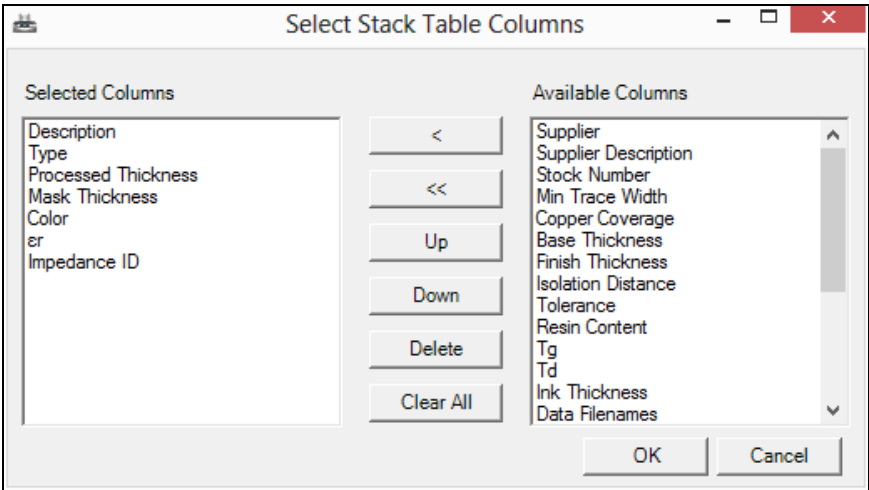


Use the Drills (Stack Table) command to show or hide the drills in the stackup graphic in the Stack Table.

The Thickness Totals provides optional display of the sum of materials thicknesses, copper, dielectric, solder mask and the stackup – with and without the solder mask thickness.

Use the Show Stack Up Thickness command to display or hide the target or calculated values of total stack thickness.


When the target value of the Stack Up thickness is chosen the Stack Up Thickness Tolerance values can be displayed as percentages of the target stack thickness or as actual values.

Choose Stackup Thickness Accuracy to display accuracy by number of decimal places.

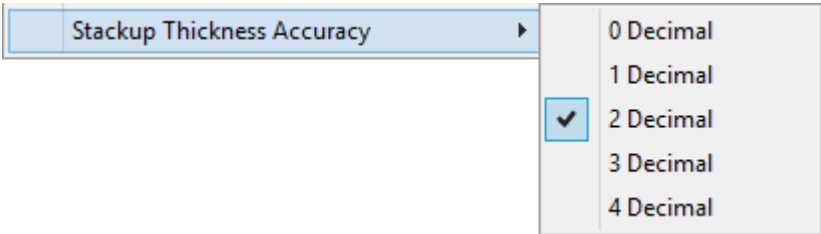


*Controlled Impedance Data Table*

Use the Controlled Impedance Data Table options to show or hide the controlled impedance structures and parameters.

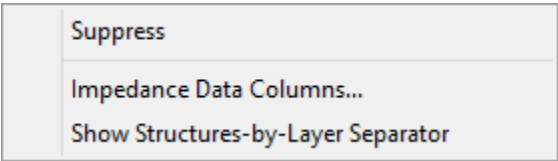

Impedance Data columns can be selected for display and ordered as required. Choose the parameters for display from


the Available Columns pane and change the order of display using the Up and Down buttons.

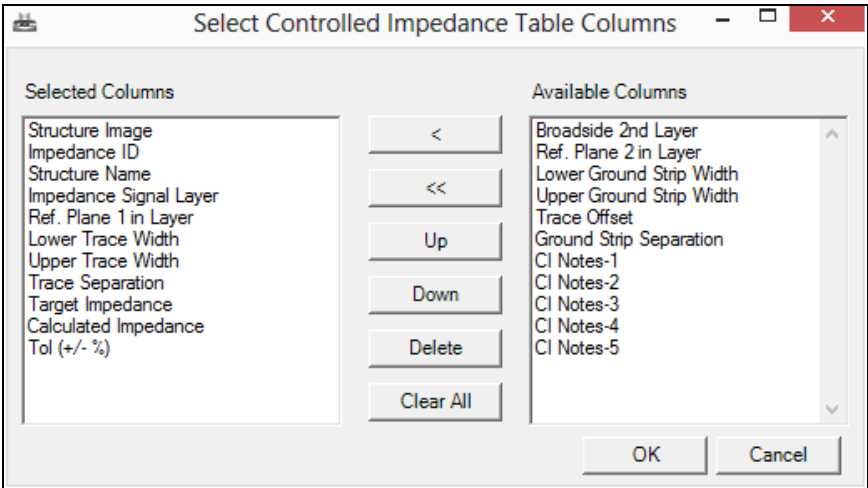


Within the Impedance Data Table structures can be grouped by layer; choose Show Structures-By-Layer Separator. The Separator will add a black structure separator bar on the print out between structure groups, allowing the structures to be sorted by layer number rather than the order that the structures are added to the stack.

*Drill DataTable*

Use the Drill Data Table command to show or hide the table of drill parameters and to select and order parameter values for display.

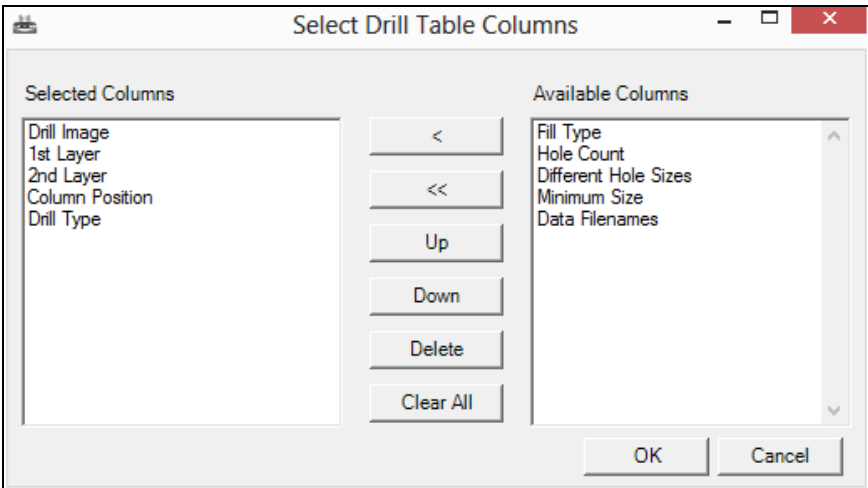

Use the Sort Drills... command to order the drill table – drills can be sorted by start-end layer order or creation order

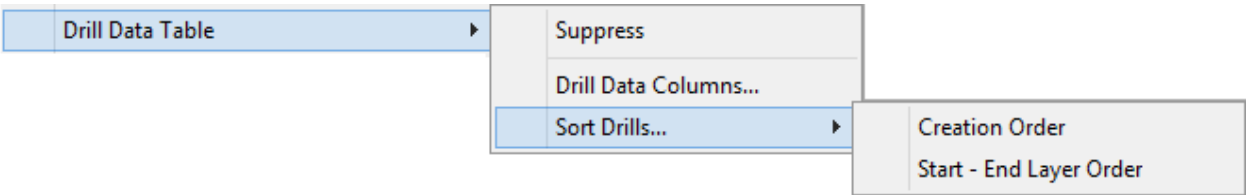


### *Note Field Aliases*

Note Field Aliases allows for the free-text note fields (for the Stack and Controlled impedance tables) to be given descriptive names.

### *Print Order*


Use the Print Order dialog to move the Controlled Impedance Table, Drill Tables and Notes sections up or down within the report.

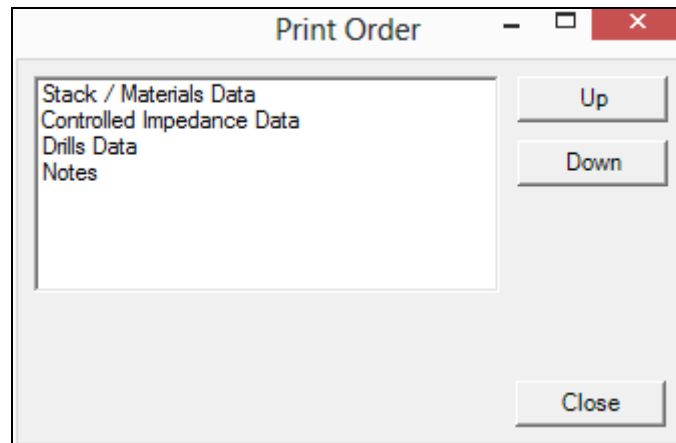

*Note: the Stack/Materials data Table cannot be reordered and must remain the first item in the print order.*

### *General options*

Use the General Options to specify

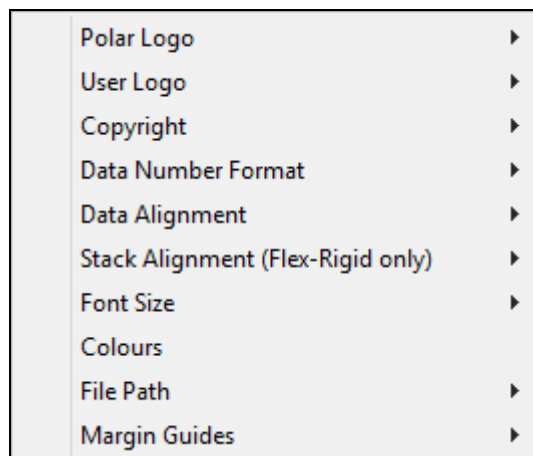

Polar Logo: toggles on and off the Polar Instruments logo.

User Logo: toggles on and off the user-defined logo (as set in the application configuration).

Copyright: toggles on and off the copyright information and allows copyright text to be edited.

Data Number Format: sets the precision of numeric data in the printout.

Data Alignment: specifies alignment (left, centre, etc.) for stack, impedance and drill data.

Stack Alignment (Flex-Rigid only): – Align to Master Stack allows the vertical position of sub-stacks (printed on separate pages within the report) to be preserved with respect to the master stack; Align to Page Top presents each sub-stack at the top of each page.

Colours: allows for the colours of items within the report to be customised. Click Override Default Colours and Change to specify the new colour. Click Reset All to return to the default colours.

File Path: toggles on and off the file path/file name

Margin Guides: toggles on and off boundary markings (in the user selected units.) These match the Speedstack units selected within the Stackup Editor | Units menu.

The margin guides allow for display of the printable area of the page – which can vary depending upon the device – even though the page size remains the same. (With some devices the report cannot use the full extents of the page.)



## Appendix A