






Building a rigid-flex construction

Richard Atrill - August 2019

Impedance calculation




Welcome to Speedstack

This tutorial leads you through the process of creating a rigid-flex construction. This is a follow-on document to the 'Getting Started with Speedstack' guide which we would recommend that you read before following this tutorial.

If you would like the Speedstack project files (.sci) used during this tutorial please request them from polarcare@polarinstruments.com.

Speedstack – Introducing the interface

Toolbar provides access to commonly used functions included add, delete and swap materials.

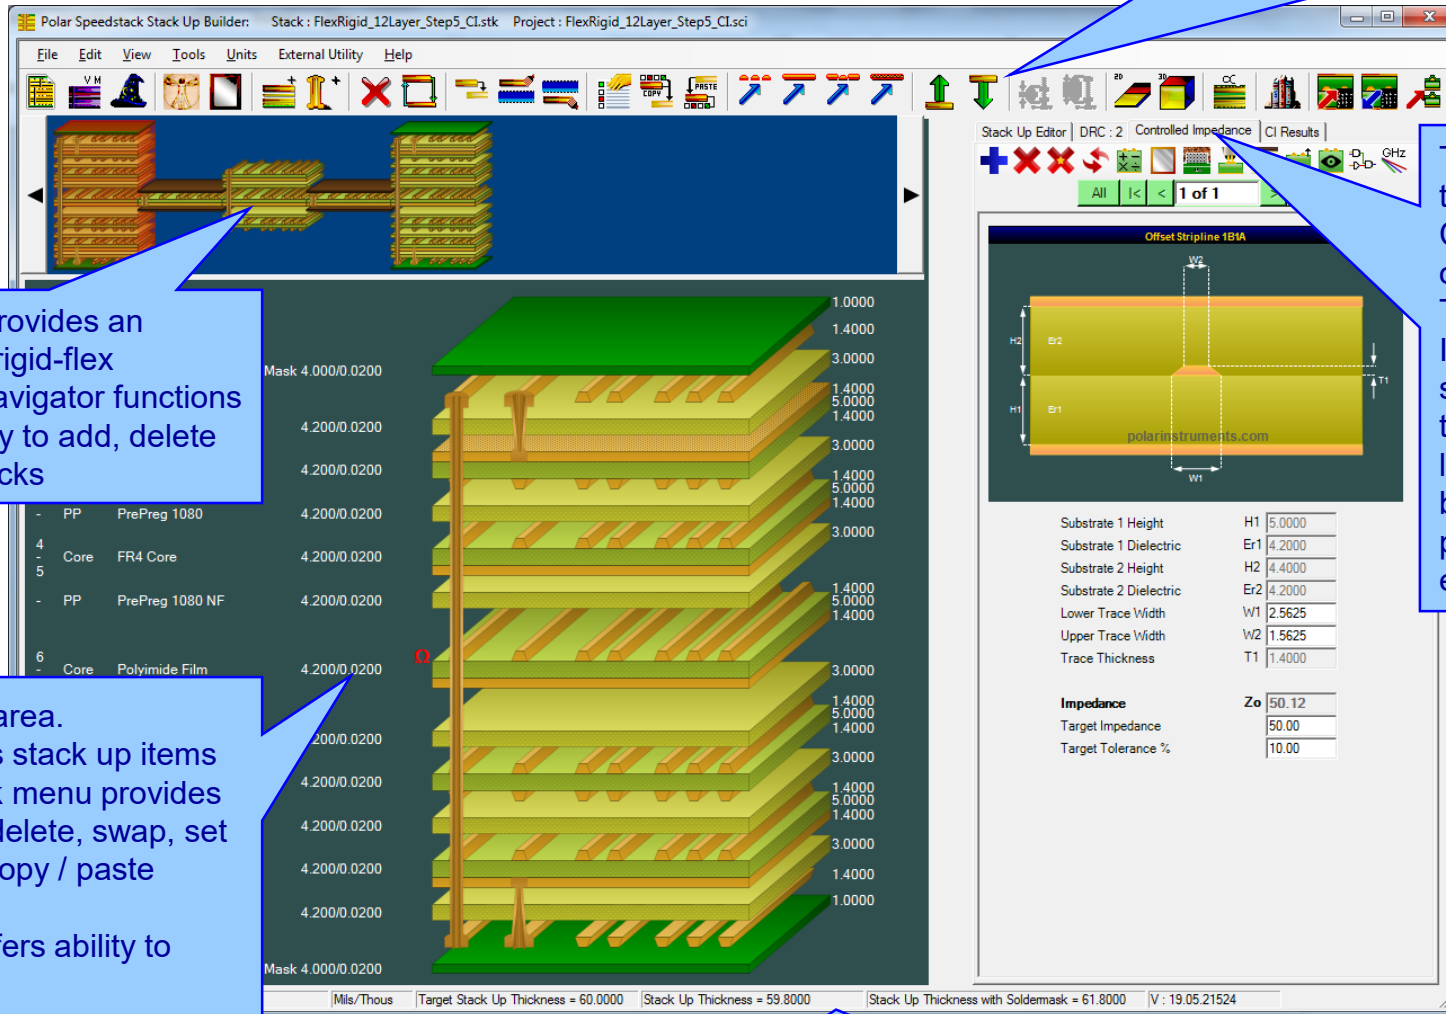

The Navigator provides an overview of the rigid-flex construction. Navigator functions include the ability to add, delete and edit sub-stacks


Stack up editor area. Left-click selects stack up items (blue), right-click menu provides options to add, delete, swap, set properties and copy / paste materials. Mouse wheel offers ability to zoom in / out

Stack Up Editor | DRC : 2 Controlled Impedance | CI Results
 All | < | > | 1 of 1
 Tabs provide access to Stack Up, DRC and Controlled Impedance options. The Controlled Impedance tab allows structures to be added to the stack on a per layer basis. The browser buttons provide access to each structure


Stack up thickness can be monitored via the status bar

Step 1: Setting the Units and Materials Library Mode

From the Units menu select the 'Mils/Thou' option

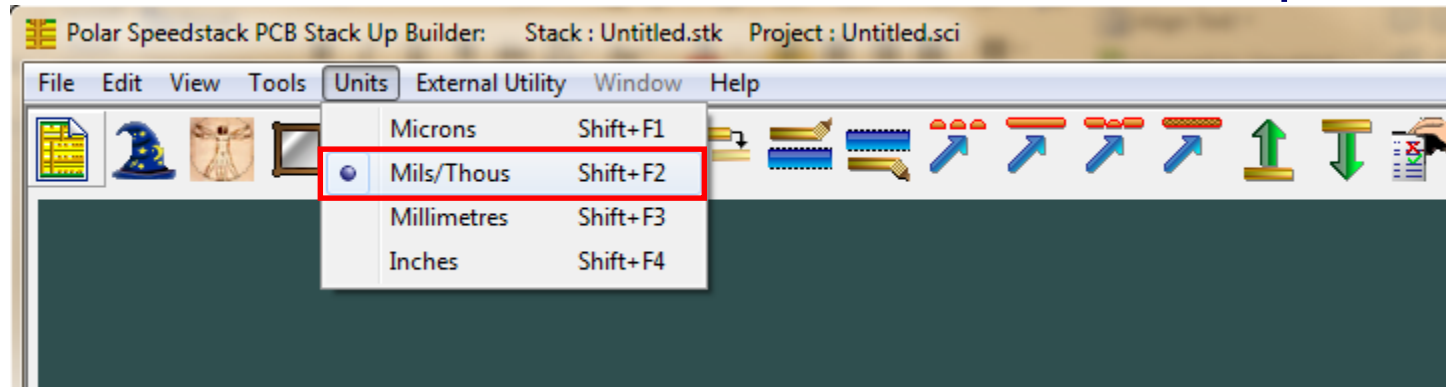


From the Tools menu de-select the 'Virtual Material Mode' option, this will enable Materials Library Mode. Note the enabled icon 

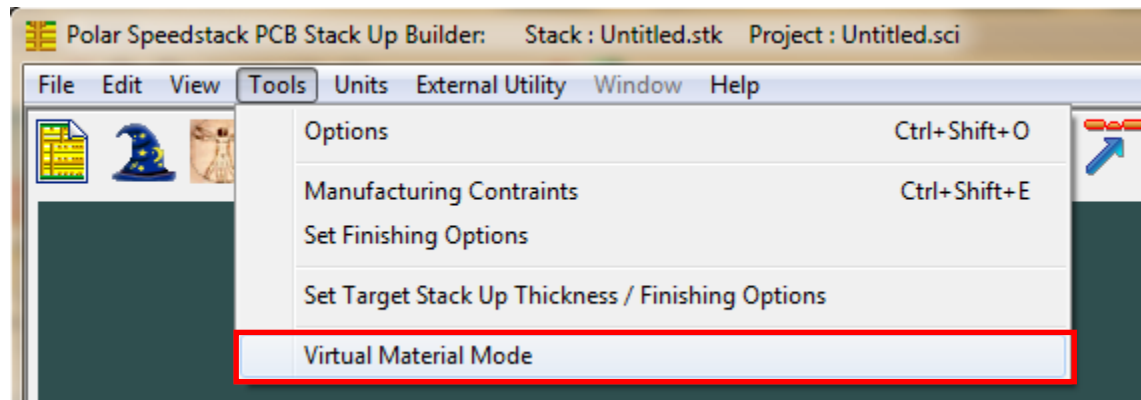


Step 2: Enabling the Speedstack Flex option

The Speedstack Flex Navigator option is a licensed add-on to Speedstack that can be enabled using the Tools menu Options, Licensing tab selection

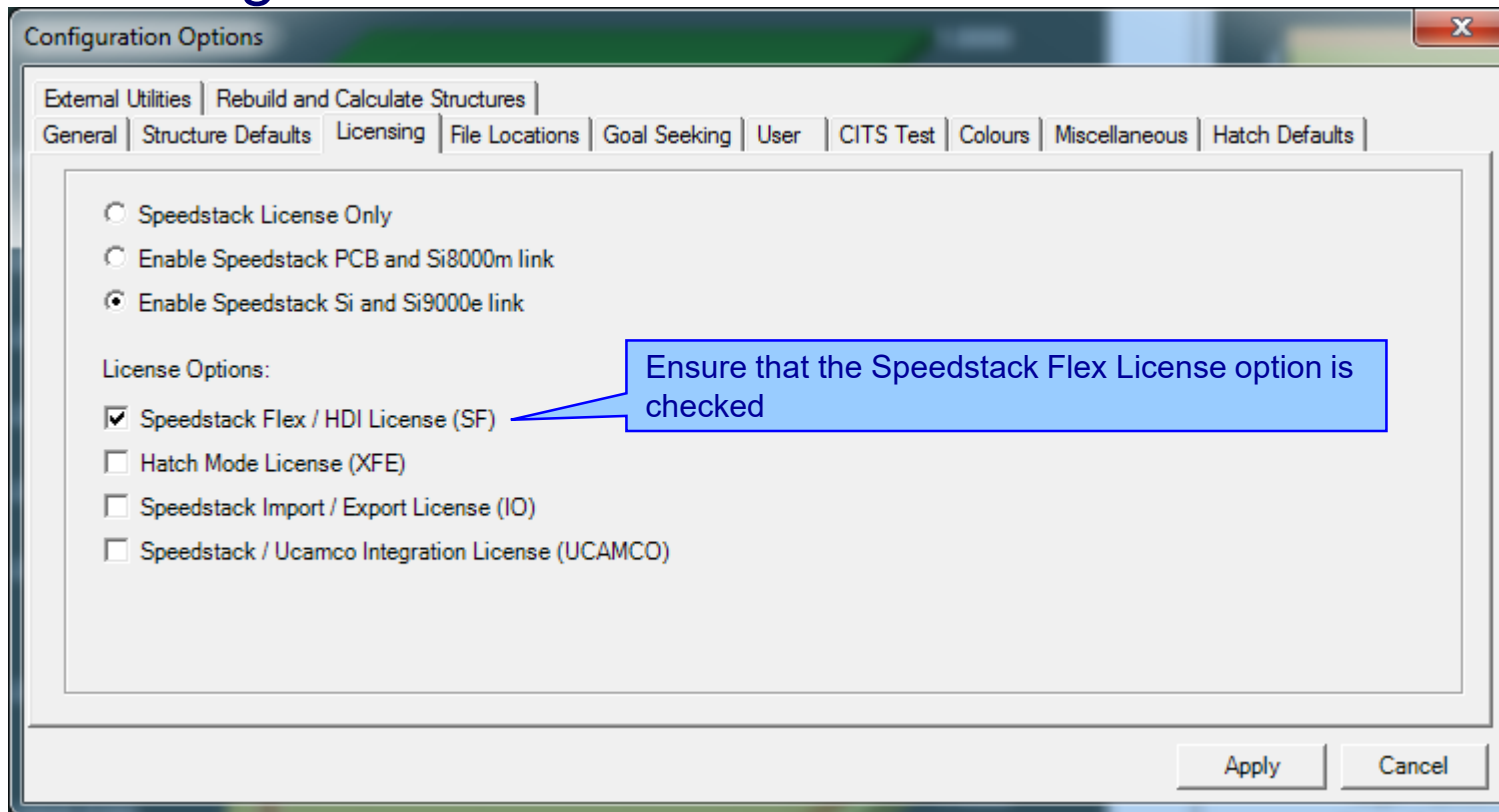

Step 3: Opening an existing single stack up project


Open the 'Speedstack_RigidFlexConstruction_SingleStack_2019.sci' project file that has been supplied with this tutorial. Notice the flexible core material within the stack, shown in grey

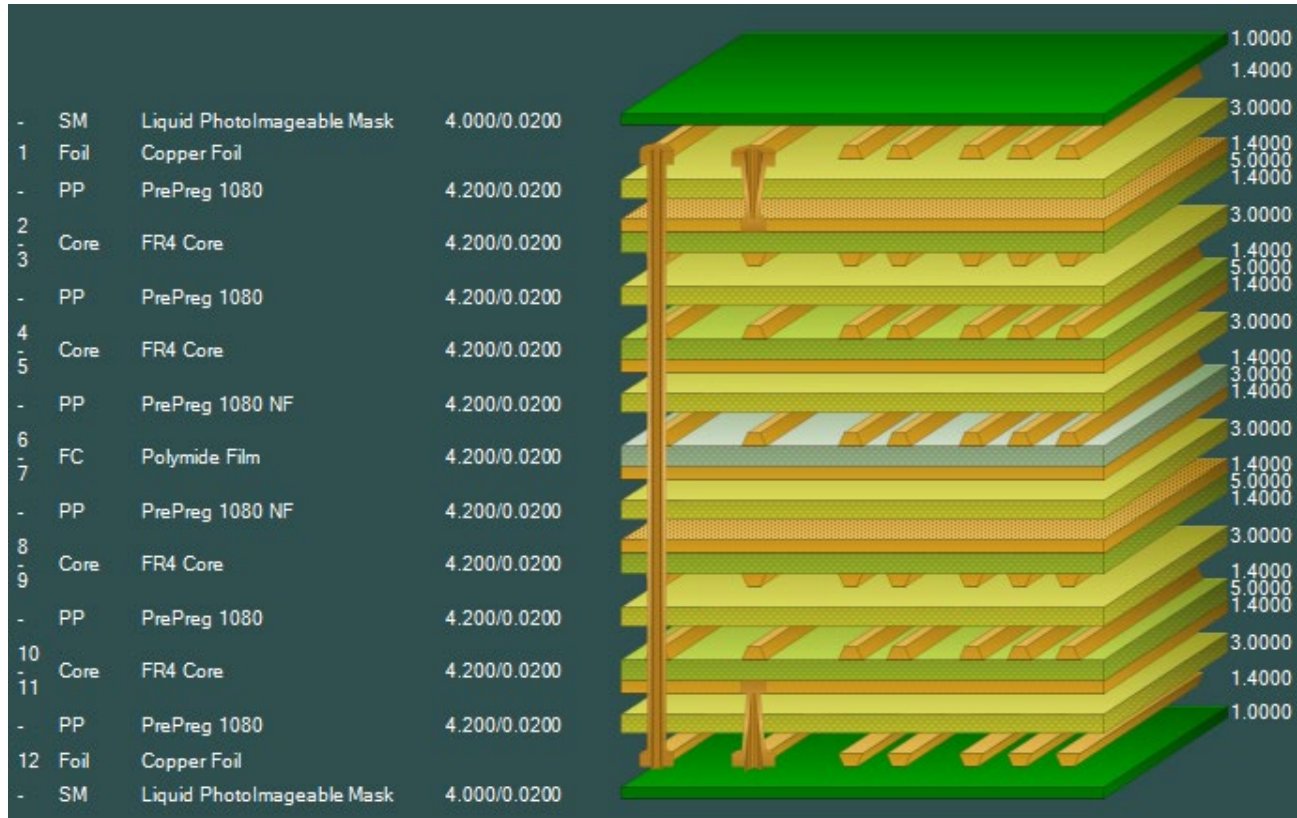

Flexible core shown in grey to differentiate it from rigid cores

Step 4: Opening the Navigator

From the View menu select the Open Navigator option. Notice that a small version of the current stack is displayed

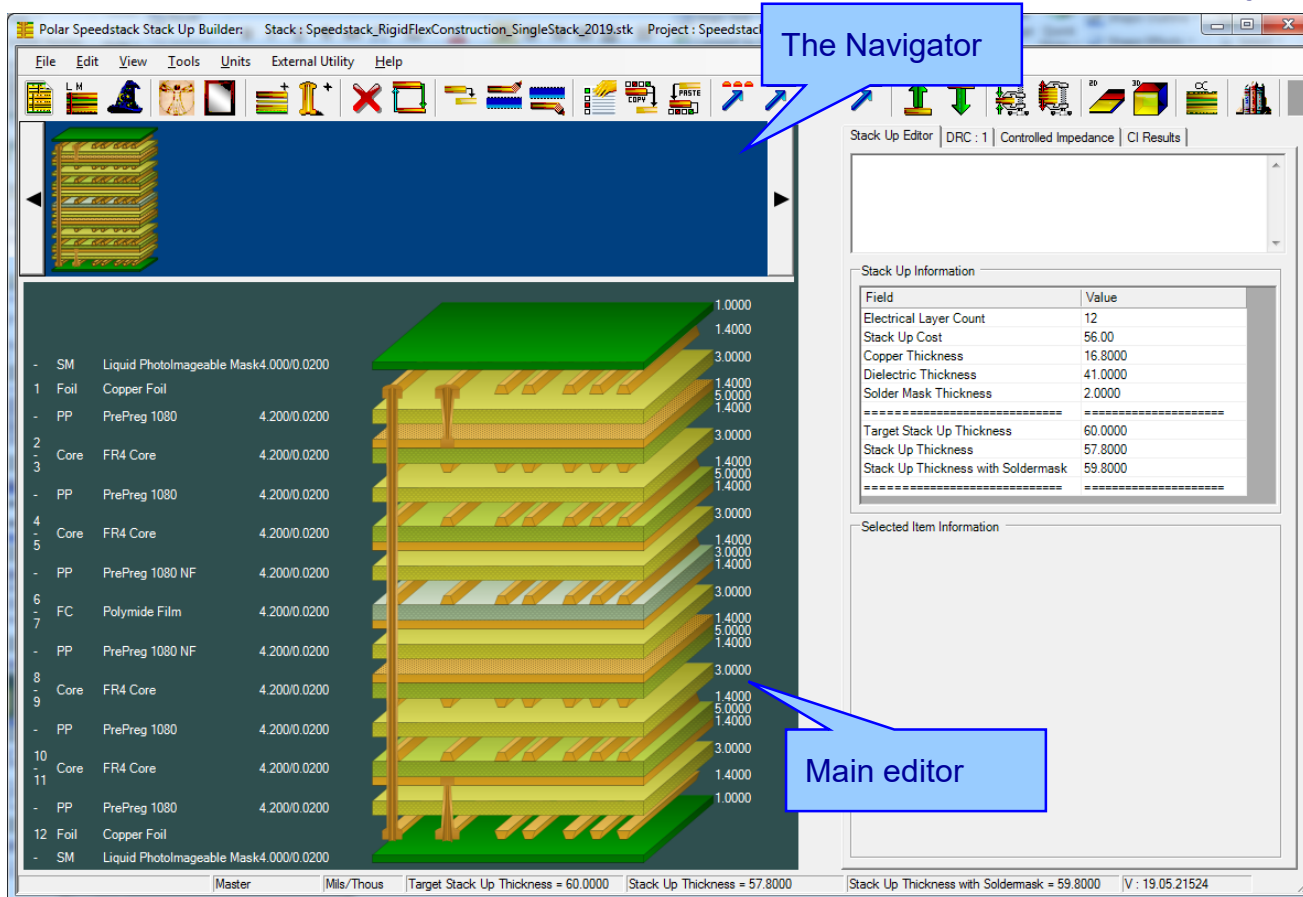

The Navigator

Main editor

Field	Value
Electrical Layer Count	12
Stack Up Cost	56.00
Copper Thickness	16.8000
Dielectric Thickness	41.0000
Solder Mask Thickness	2.0000
=====	=====
Target Stack Up Thickness	60.0000
Stack Up Thickness	57.8000
Stack Up Thickness with Soldermask	59.8000
=====	=====

Stack Up Information

Selected Item Information


Master | Mils/Thous | Target Stack Up Thickness = 60.0000 | Stack Up Thickness = 57.8000 | Stack Up Thickness with Soldermask = 59.8000 | V : 19.05.21524

Step 5: Adding a sub-stack

The first stack of the construction is known as the 'Master' stack, in this case the 12 layer stack that is currently loaded. The electrical layer numbers of sub-stacks are determined from the Master stack, so this stack up should be created first.



To add a sub-stack:

- Click on the 'Master' stack in the Navigator
- Use the right-click menu and select **Add Stack | Define by layers**

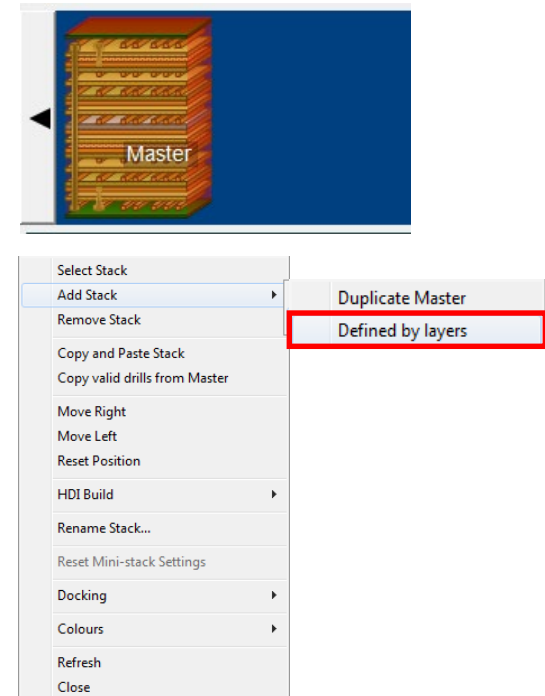

Step 5: Adding a sub-stack (continued)


- The Define New Stack dialog controls which materials in the Master are added to the new sub-stack. In this case just the flex core, layers 6 / 7
- The new sub-stack position is to be placed to the far-right of the existing stack
- The sub-stack name is called 'Flex'
- Selecting 'Apply' will add the 'Flex' sub-stack, highlighted with a red background

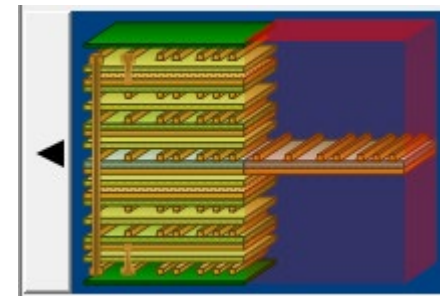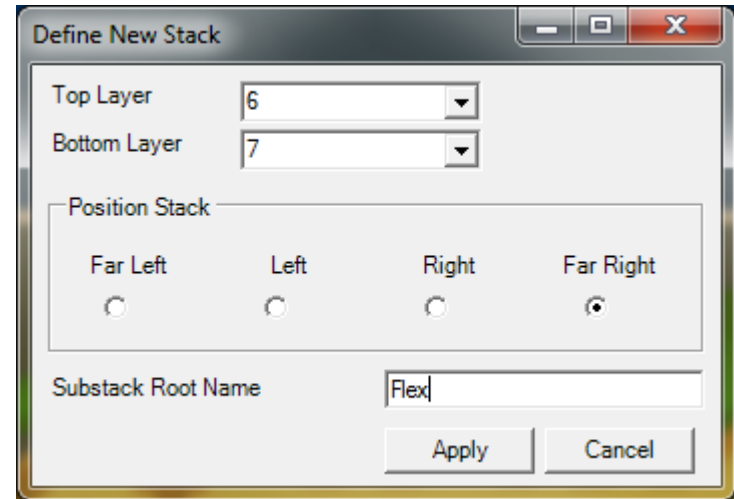


Step 5: Adding a sub-stack (continued)

At this point two stacks exist, the 12-layer Master stack and the 2-layer flex sub-stack. Clicking the stack in the Navigator will update the stack displayed in the main editor window.

12-layer Master stack

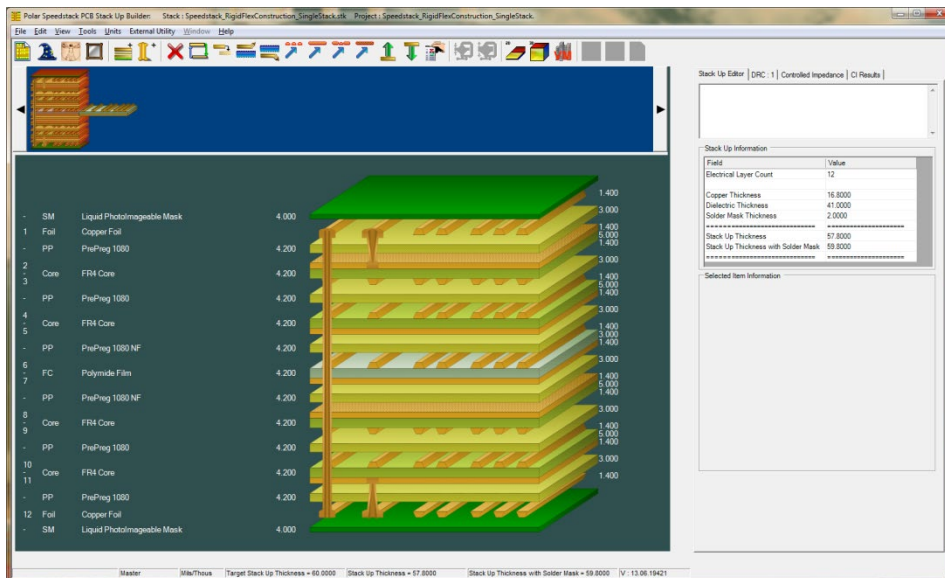




2-layer flex stack

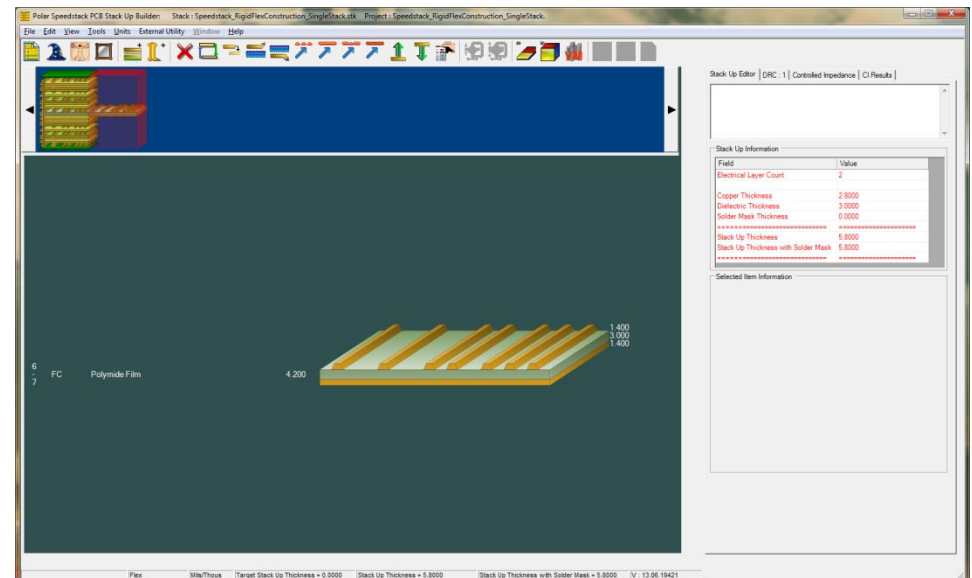


Step 6: Adding additional materials to the Flex sub-stack



Often it is necessary to add flex-specific materials to flexible sub-stacks. The following steps will add coverlays to the flex core

- Click on the Flex stack in the Navigator
- The Flex sub-stack will be displayed in the main editor window
- Select the flex core material, layers 6 / 7
- From the right-click menu select Add | Coverlay and choose the top item from the list. Select Add Material Above 

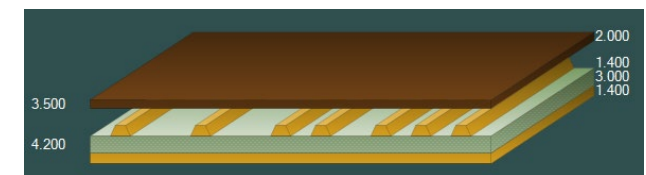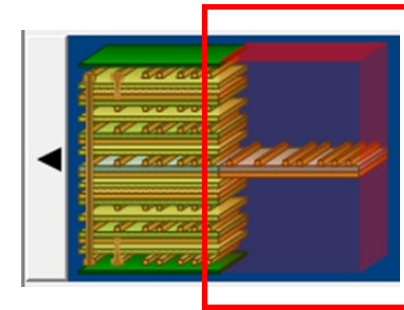


Step 6: Adding additional materials to the Flex sub-stack (cont'd)

- Select the flex core material, layers 6 / 7
- From the right-click menu select Add | Coverlay and choose the top item from the list. Select Add Material Below 

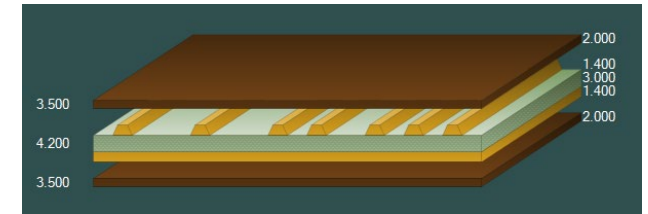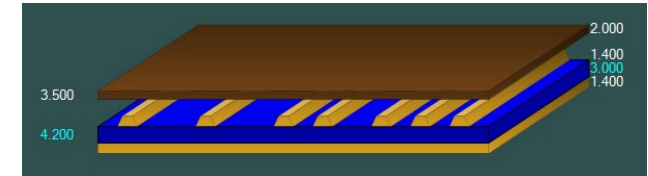

Step 6: Adding additional materials to the Flex sub-stack (cont'd)

At this point the 2-layer flex sub-stack is complete as it contains a flex core with coverlay material above and below the exposed copper surfaces.

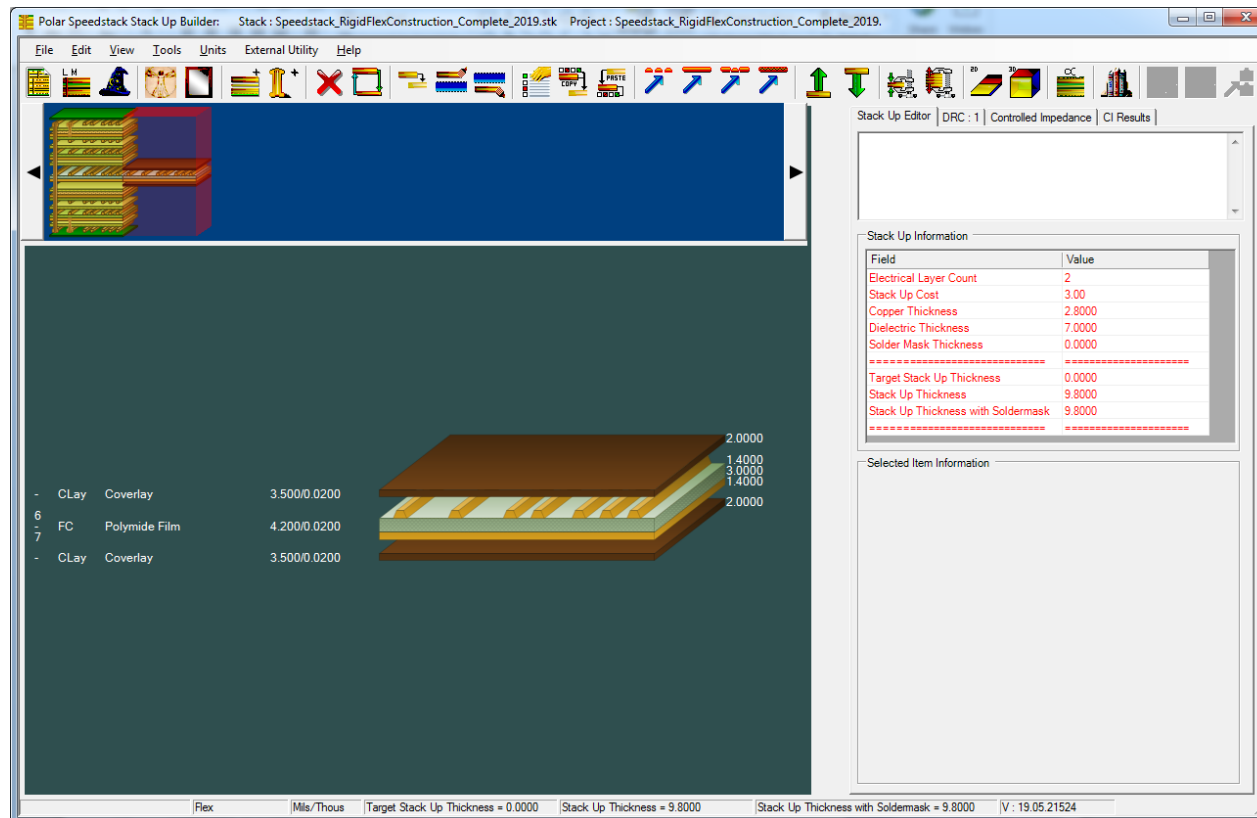

The screenshot shows the Polar Speedstack Stack Up Builder interface. The main window displays a 3D model of the stack-up and a detailed table of material layers. The table lists the following layers:

Layer	Material	Thickness (Mils/Thous)
- CLay	Coverlay	3.500/0.0200
6 - FC	Polymide Film	4.200/0.0200
- CLay	Coverlay	3.500/0.0200

The right-hand pane shows the 'Stack Up Information' table:



Field	Value
Electrical Layer Count	2
Stack Up Cost	3.00
Copper Thickness	2.8000
Dielectric Thickness	7.0000
Solder Mask Thickness	0.0000
Target Stack Up Thickness	0.0000
Stack Up Thickness	9.8000
Stack Up Thickness with Soldermask	9.8000

The status bar at the bottom indicates: Flex | Mils/Thous | Target Stack Up Thickness = 0.0000 | Stack Up Thickness = 9.8000 | Stack Up Thickness with Soldermask = 9.8000 | V: 19.05.21524

Step 7: Completing the rigid-flex construction



Many rigid-flex designs have a flexible circuit between two rigid stack ups, a rigid – flex – rigid construction.

- Click on the Master stack in the Navigator
- Use the right-click menu and select Add Stack | Duplicate Master

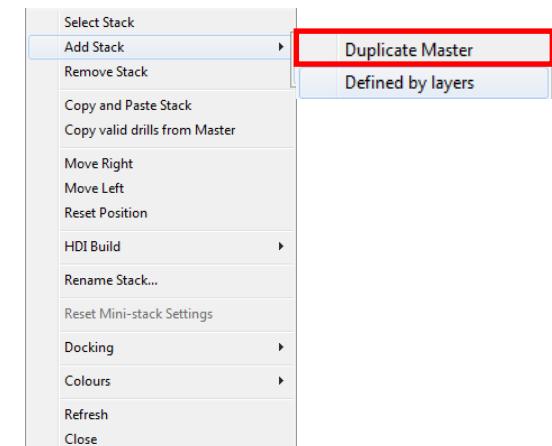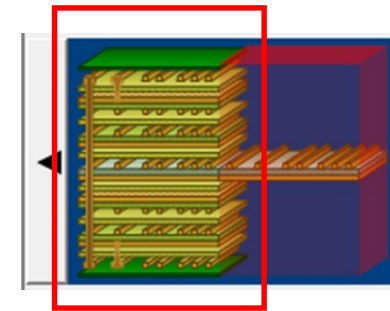


Step 7: Completing the rigid-flex construction (continued)

- The Duplicate Master Stack dialog allows the user to alter the properties of the new sub-stack. In this case the Stack Name is called 'Rigid'. Selecting OK will add the duplicate stack
- The construction now contains an additional rigid sub-stack

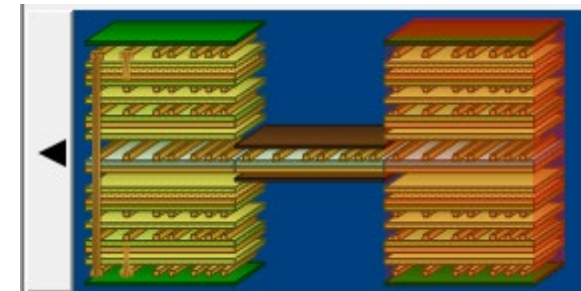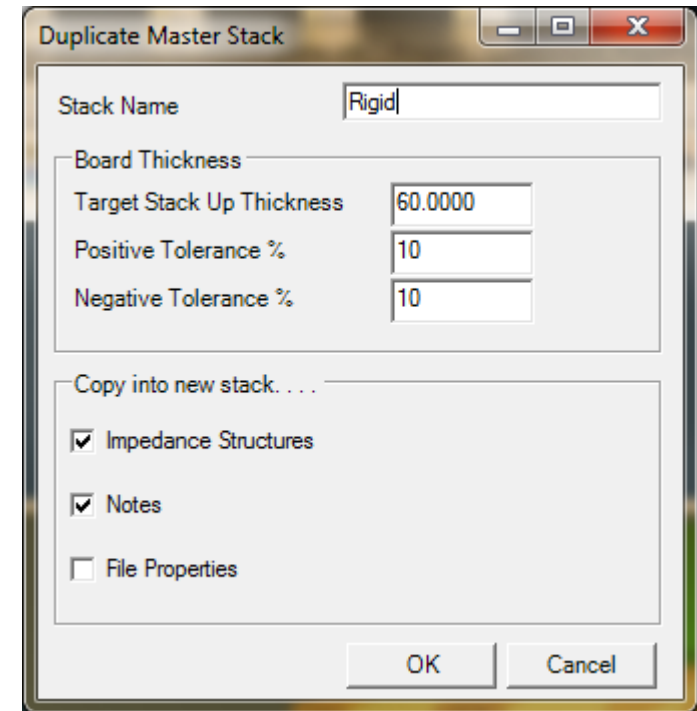

Step 7: Completing the rigid-flex construction (continued)

The rigid – flex – rigid construction should now appear as follows

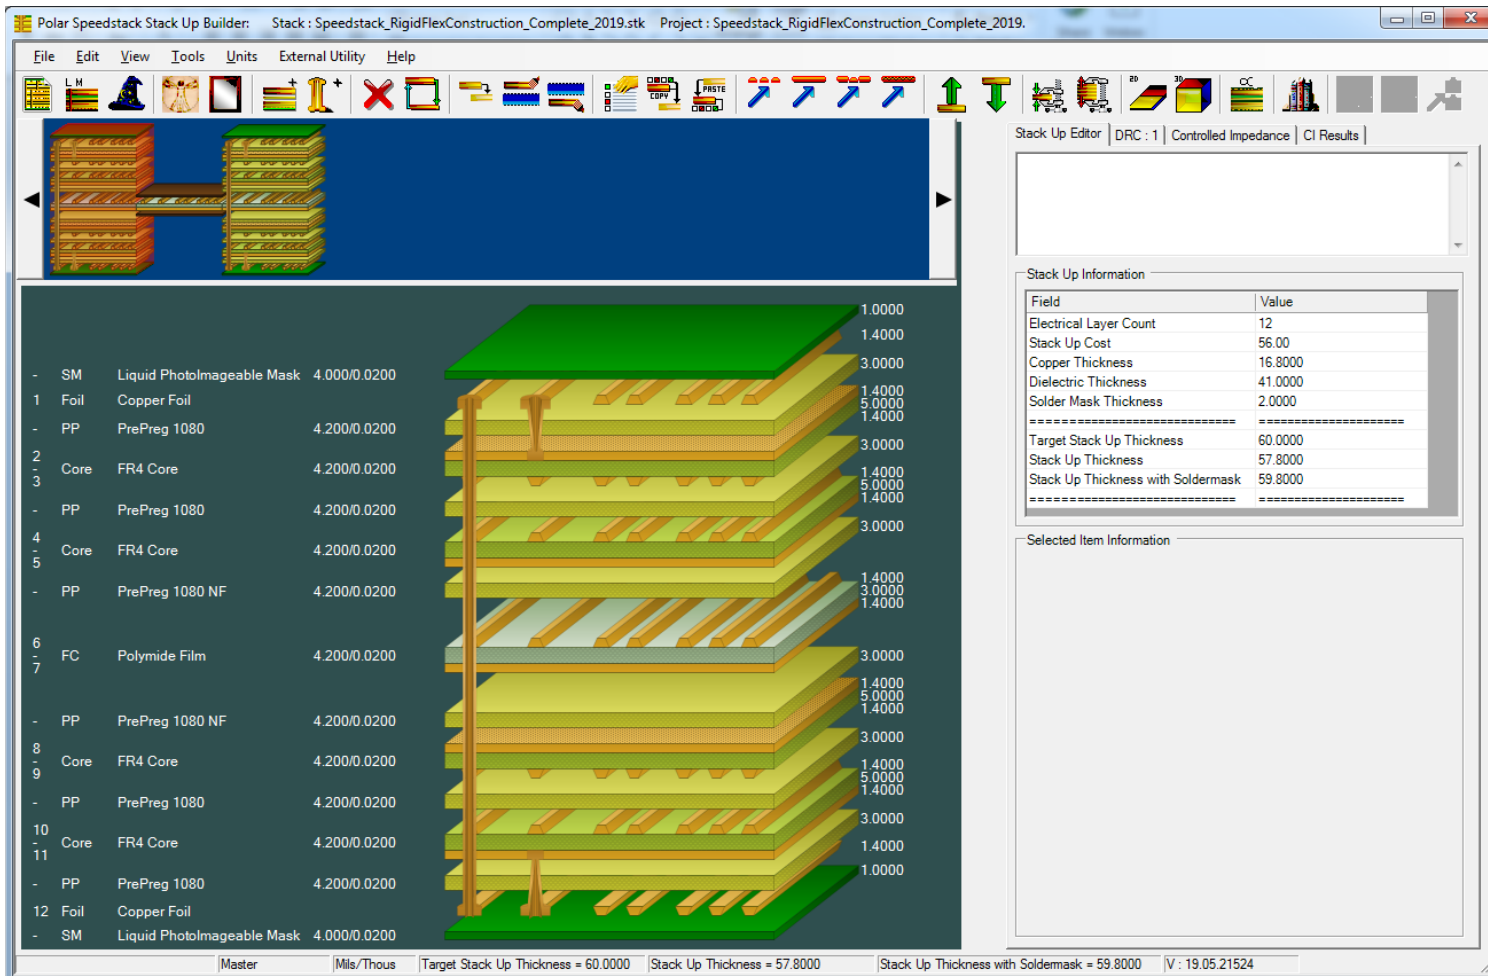

Stack Up Editor | DRC: 1 | Controlled Impedance | CI Results

Field	Value
Electrical Layer Count	12
Stack Up Cost	56.00
Copper Thickness	16.8000
Dielectric Thickness	41.0000
Solder Mask Thickness	2.0000
=====	
Target Stack Up Thickness	60.0000
Stack Up Thickness	57.8000
Stack Up Thickness with Soldermask	59.8000
=====	

Layer	Material	Thickness
-	SM	Liquid PhotoImageable Mask 4.000/0.0200
1	Foil	Copper Foil 1.4000
-	PP	PrePreg 1080 4.200/0.0200
2	Core	FR4 Core 4.200/0.0200
3	PP	PrePreg 1080 4.200/0.0200
4	Core	FR4 Core 4.200/0.0200
5	PP	PrePreg 1080 NF 4.200/0.0200
6	FC	Polymide Film 4.200/0.0200
7	PP	PrePreg 1080 NF 4.200/0.0200
8	Core	FR4 Core 4.200/0.0200
9	PP	PrePreg 1080 4.200/0.0200
10	Core	FR4 Core 4.200/0.0200
11	PP	PrePreg 1080 4.200/0.0200
12	Foil	Copper Foil 1.4000
-	SM	Liquid PhotoImageable Mask 4.000/0.0200

Master | Mils/Thous | Target Stack Up Thickness = 60.0000 | Stack Up Thickness = 57.8000 | Stack Up Thickness with Soldermask = 59.8000 | V: 19.05.21524

Step 8: Saving the Speedstack project

Now that a rigid-flex construction has been created we can save it

Use the File | Save Project As menu option and specify a filename

The filename will have a .SCI extension, recognisable by this icon 

Summary

At this point the rigid – flex – rigid construction is complete. Impedance structures may be added to each sub-stack, with the structure types being determined by the materials in each sub-stack.

The ‘Getting Started with Speedstack’ tutorial will guide you through the process of adding structures and generating technical reports.

If you have any questions please feel free to contact your local Polar office at: www.polarinstruments.com/distrib/international_offices.html

or contact us at polarcare@polarinstruments.com

Thanks again for using Speedstack.